CP6860 THEO™

13" and 24" Pendants



VisaLighting.com/products/Theo

Type: Project: Location:







DIMENSIONS^{1,7}


H = Body Height DIA = Diameter OAH = Standard Overall Height Max OAH = Maximum Overall Height WT = Weight

	CP6860-13	CP6860-24		
Н	13" (330 mm)	24" (610 mm)	CP6860-13	CP6860-24
ОАН	42" (1067 mm)	42" (1067 mm)		
MAX OAH	240" (6096 mm)	240" (6096 mm)		
DIA	2" (51 mm)	2" (51 mm)		
WT	1.7 lbs	1.8 lbs	OAH	[]] 3" [] (76 mm)
3" (76 mm) 10" (254 mm)			m) [] H	H 21" (533 mm)


FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- 0-10V dimming to 1%
- Optional 90CRI
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5-1/4" diameter and 3/8" deep
- Driver in canopy (SDC) includes round canopy 6-1/4" diameter and 1-3/8" deep
- Canopy mounts over 4x4 junction box (by others) with provided hardware and is painted white
- Suspended with a black, gray, or white power cord
- Accommodates ceiling slopes up to 45 degree
- Unique transparent acrylic light rod with light-conducting properties for uniform illumination throughout the entire rod surface
- Non-VOC powder coat or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING



PHOTOMETRICS









Buy American
Compliant
VisaLighting.com

CP6860 THEO (cont.)

13" and 24" Pendants



Fill in shaded boxes using information listed below **CP6860 MVOLT** MODEL SOURCE² SOURCE OPTION³ VOLTAGE CORD DRIVER5 OPTION 6 LENGTH1 **FINISHES** OAH7 13" L30K 90CRI **MVOLT** COLOR4 RMD DCC 24" SDC L35K See last page BSC See page 1 for finish Minimum 80CRI is L40K WSC order codes standard if 90CRI GSC See page 1 option is not selected

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	ССТ	Delivered Lumens	Power/Watts
L30K	3000K	725	
L35K	3500K	750	7
L40K	4000K	750	

SOURCE OPTION³

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens
	reduced by 18%)

CORD COLOR4 (Select one)

Cord Color Options		
BSC Black power cord		
WSC	White power cord	
GSC	Gray power cord	

Suggested Cord Colors for Premium Finishes		
OBA, BZA, PRA, RBA	BSC	
BBA, BUA	WSC	
BCA, BA, SNA	GSC	







DRIVER⁵ (Select one)

See page 3 for more information

SDC	Surface canopy with integral driver; canopy is painted white
RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white.



Option availability may be interdependent with 0ther 0ptions

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)	
-----	---	--

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>55,000 hrs



CP6860 THEO (cont.)

13" and 24" Pendants




REMOTE DRIVER (RMD) INFORMATION


8" Box Dimensions 8" 3-1/5" 9" Side Mount

Maximum Recommended Remote Wiring Distance from **RMD** to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft • 20GA 30 ft



Remote driver boxes have knockouts for conduit connections



THEO PRODUCT FAMILY


- CP6860-13 13" Pendant
- CP6860-24 24" Pendant
- CB6860 Single Rod Sconce
- CB6862 Double Rod Sconce

See <u>Visalighting.com/families/Theo</u> for more information

SUGGESTED VARIATIONS

- · Techflex cord coverings
- Pendant clusters
- Alternative mA settings

Techflex Cord Coverings

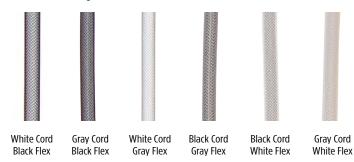

CP6860 THEO (cont.)

Finishes



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



Alternative Metal Finishes (Premium)



Metal Finish (Premium)



BA Brushed Aluminum