


OP2122 ZUME™ OUT

12” Catenary Suspension



VisaLighting.com/products/Zume-out

Type: _____ Project: _____ Location: _____

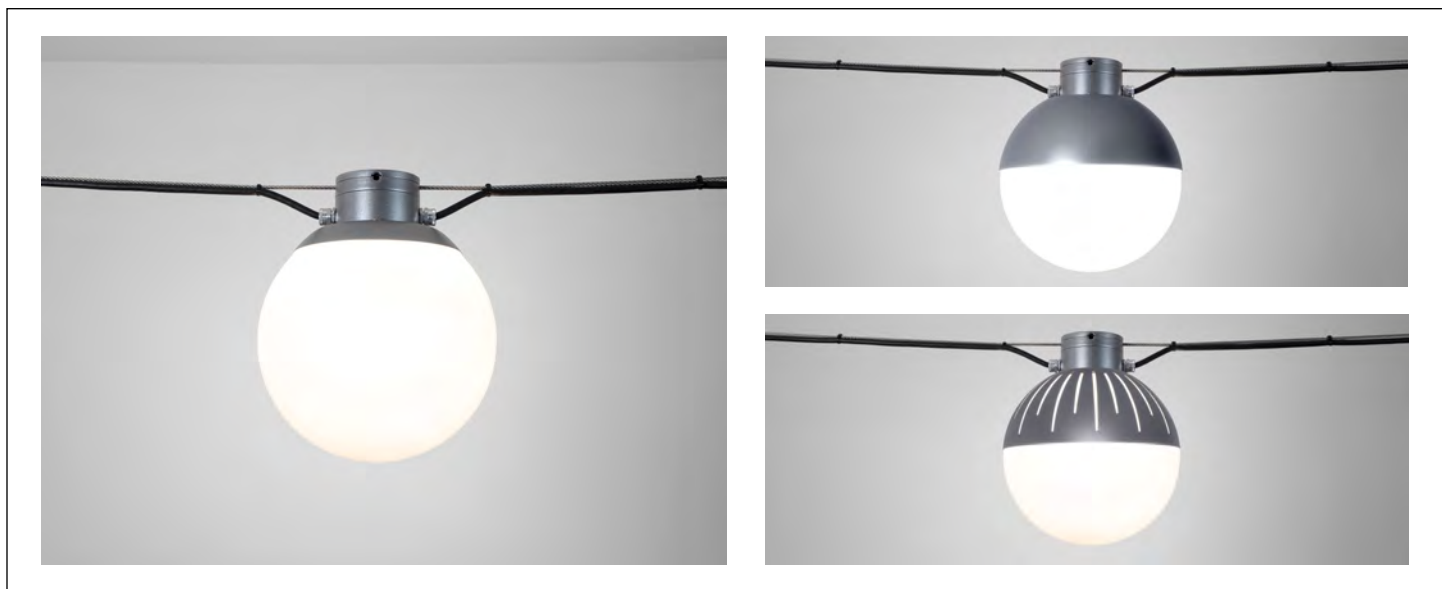


DIMENSIONS⁵ PCL MUST BE SPECIFIED

DIA = Diameter X = Body Height PCL = Power Cord Length WT=Weight

PCL is the distance (in inches) from the fixture to the end of the cord jacket or to the end of installed quick connect (for options including a quick connect)
 Example: PCL (60) indicates a power cord length of 60”.



DIA	12”	(305 mm)
X	12-1/4”	(311 mm) Add 1-3/4” to X value with MSC option
PCL	60”	(1524 mm)
EPA	2.4ft ²	
WT	8 lbs	

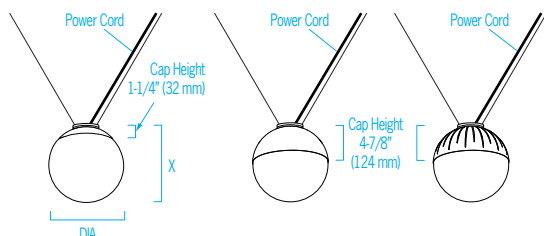

FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- High and low lumen output
- Integral driver
- IP65 rated
- **Stainless steel structural cables are not include. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Cable connections to the fixture accept 1/8” to 1/4” diameter cables
- Fixtures may not be directly mounted to catenary cables over 1/4” diameter. Suspended mount must be used (see relative scale drawing)
- Crossing secondary cable is perpendicular to the primary cable and is limited to 1/8” when the primary cable is 1/4”
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 ‘American National Standard for Roadway and Area Lighting Equipment’ at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish
- ETL listed for wet locations

RELATIVE SCALE DRAWING PHOTOMETRICS

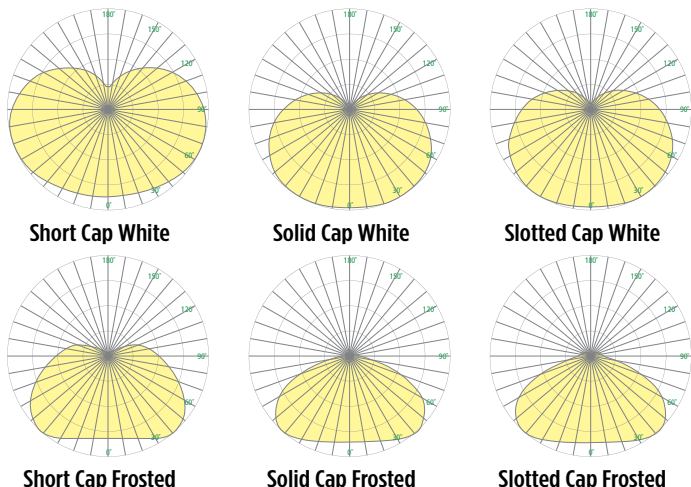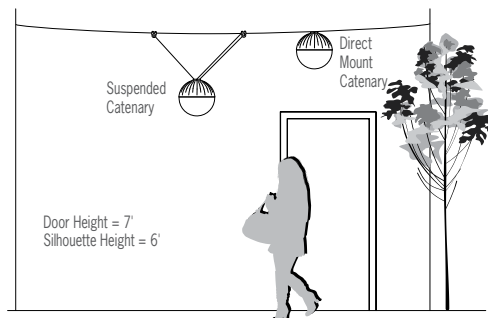

OP2122 ZUME OUT (cont.)

12" Catenary Suspension



Fill in shaded boxes using information listed below

OP2122		- MVOLT					
MODEL	CAP¹ ShortCAP SolidCAP SlottedCAP	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE MVOLT	CAP FINISH See last page for finish order codes	CATENARY³ 1QC 2QC MSC SPC	DIFFUSER⁴ AC FRST	PCL (POWER CORD LENGTH)⁵ See page 1

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	1700	1900	1200	1400	1300	1500	17
L30K(L)	3000K	1100	1200	800	900	800	900	10
L35K(H)	3500K	1800	1900	1200	1500	1300	1500	17
L35K(L)	3500K	1100	1200	800	900	800	900	10
L40K(H)	4000K	1800	2000	1300	1500	1300	1500	17
L40K(L)	4000K	1100	1200	800	900	800	1000	10

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

CATENARY POWER CONNECTION³ (Select One)

See page 3 for more information


1QC	One quick connect (factory installed)
2QC	Two quick connects (factory installed)
MSC	Mid-run horizontal splice connection (mounted at top of unit)
SPC	Single power cord

DIFFUSER⁴ (Select One)

- AC White acrylic globe
- FRST Frosted translucent globe



White



Frosted Translucent


OP2122 ZUME OUT (cont.)

12" Catenary Suspension



CATENARY POWER ILLUSTRATIONS

See page 4 for additional accessories

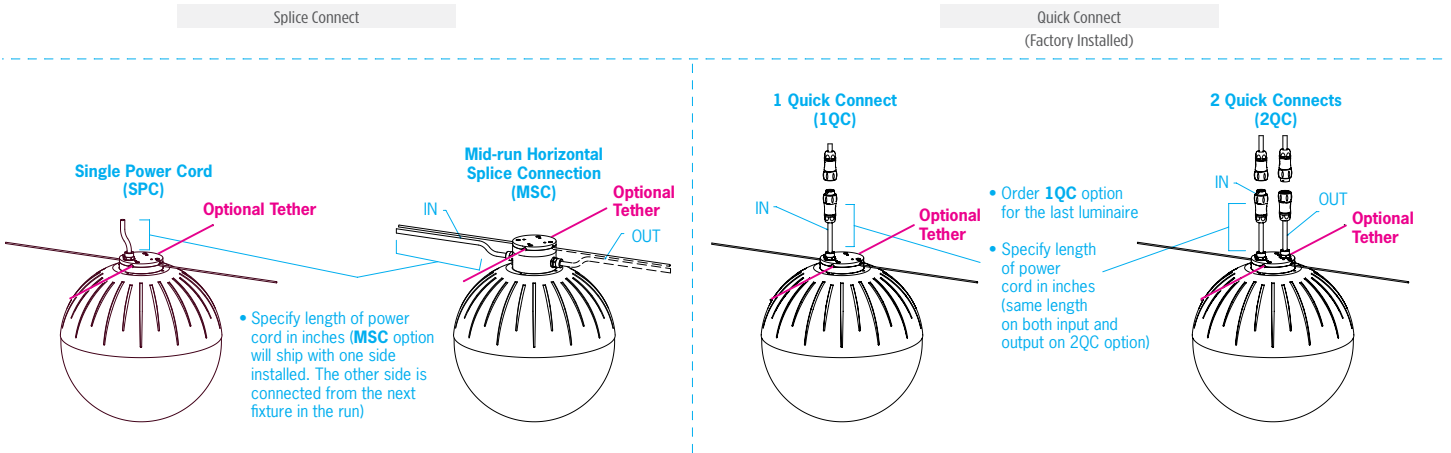

ZUME PRODUCT FAMILY

Zume Out – Outdoor	Cord and Cable Suspension	<ul style="list-style-type: none"> • OP2120-ShortCap – 12" • OP2130-ShortCap – 16" • OP2140-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2120-SolidCap – 12" • OP2130-SolidCap – 16" • OP2140-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2120-SlottedCap – 12" • OP2130-SlottedCap – 16" • OP2140-SlottedCap – 20"
	Catenary Suspension	<ul style="list-style-type: none"> • OP2122-ShortCap – 12" • OP2132-ShortCap – 16" • OP2142-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2122-SolidCap – 12" • OP2132-SolidCap – 16" • OP2142-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2122-SlottedCap – 12" • OP2132-SlottedCap – 16" • OP2142-SlottedCap – 20"
	Stem Suspension	<ul style="list-style-type: none"> • OP2124-ShortCap – 12" • OP2134-ShortCap – 16" • OP2144-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2124-SolidCap – 12" • OP2134-SolidCap – 16" • OP2144-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2124-SlottedCap – 12" • OP2134-SlottedCap – 16" • OP2144-SlottedCap – 20"
Indoor	Zume In	<ul style="list-style-type: none"> • CP7120-8 • CP7120-12 • CP7120-16 • CP7120-22 	<div style="background-color: #f0f0f0; padding: 5px;">SUGGESTED VARIATIONS</div> <ul style="list-style-type: none"> • Link fixtures together to create a chain • Custom cap options 	
	Zume DL	<ul style="list-style-type: none"> • CP7122-12 • CP7122-16 • CP7122-22 		

See [Visalighting.com/products/Zume-out](https://www.visalighting.com/products/Zume-out) for more information

OP2122 ZUME OUT (cont.)

Finishes

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red