

OP2140 ZUME™ OUT

20" Cord and Cable Suspension



VisaLighting.com/products/Zume-out

Type: _____ Project: _____ Location: _____



DIMENSIONS ⁴

OAH MUST BE SPECIFIED

DIA = Diameter OAH = Overall Height X = Body Height WT=Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.


Example - OAH(44) indicates an overall fixture height of 44"

DIA 20" (508 mm)


X 20-1/4" (514 mm)

OAH 44" (1118 mm)

WT 10 lbs

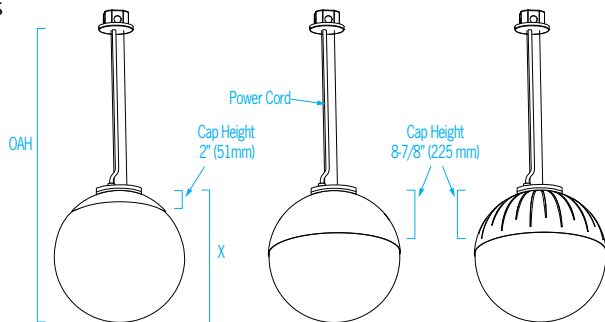


RELATIVE SCALE DRAWING

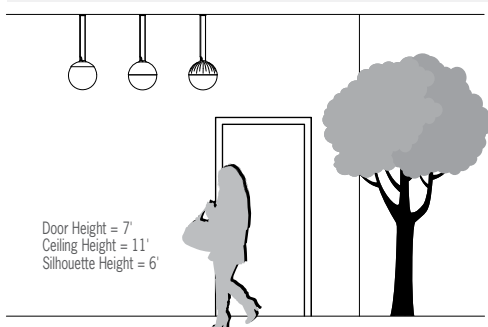

FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- High and low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- **Tether cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish
- ETL listed for wet locations

PHOTOMETRICS

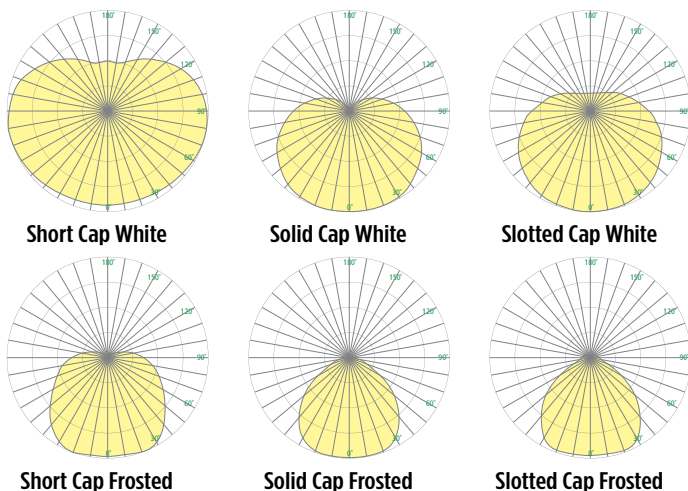

IP65



ETL Listed



5 Year Warranty



Buy American Compliant

OP2140 ZUME OUT (cont.)

20" Cord and Cable Suspension



Fill in shaded boxes using information listed below

OP2140		-		MVOLT			
MODEL	CAP¹ ShortCAP SolidCAP SlottedCAP	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	VOLTAGE MVOLT	CAP FINISH See last page for finish order codes	DIFFUSER³ AC FRST	OAH⁴ See page 1	

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	3100	3200	2000	2400	1900	2200	37
L30K(L)	3000K	2500	2500	1600	1900	1500	1700	27
L35K(H)	3500K	3200	3300	2100	2400	2000	2200	37
L35K(L)	3500K	2500	2600	1600	1900	1500	1800	27
L40K(H)	4000K	3300	3300	2100	2500	2000	2300	37
L40K(L)	4000K	2600	2600	1600	1900	1600	1800	27

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

DIFFUSER³ (Select One)

- AC White acrylic globe
- FRST Frosted translucent globe



White



Frosted Translucent

OP2140 ZUME OUT (cont.)

20" Cord and Cable Suspension



ZUME PRODUCT FAMILY

Zume Out – Outdoor	Cord and Cable Suspension	<ul style="list-style-type: none"> • OP2120-ShortCap – 12" • OP2130-ShortCap – 16" • OP2140-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2120-SolidCap – 12" • OP2130-SolidCap – 16" • OP2140-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2120-SlottedCap – 12" • OP2130-SlottedCap – 16" • OP2140-SlottedCap – 20"
	Catenary Suspension	<ul style="list-style-type: none"> • OP2122-ShortCap – 12" • OP2132-ShortCap – 16" • OP2142-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2122-SolidCap – 12" • OP2132-SolidCap – 16" • OP2142-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2122-SlottedCap – 12" • OP2132-SlottedCap – 16" • OP2142-SlottedCap – 20"
	Stem Suspension	<ul style="list-style-type: none"> • OP2124-ShortCap – 12" • OP2134-ShortCap – 16" • OP2144-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2124-SolidCap – 12" • OP2134-SolidCap – 16" • OP2144-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2124-SlottedCap – 12" • OP2134-SlottedCap – 16" • OP2144-SlottedCap – 20"
Indoor	Zume In	<ul style="list-style-type: none"> • CP7120-8 • CP7120-12 • CP7120-16 • CP7120-22 	<div style="background-color: #f0f0f0; padding: 5px;">SUGGESTED VARIATIONS</div> <ul style="list-style-type: none"> • Link fixtures together to create a chain • Custom cap options 	
	Zume DL	<ul style="list-style-type: none"> • CP7122-12 • CP7122-16 • CP7122-22 		

See [Visalighting.com/products/Zume-out](https://visalighting.com/products/Zume-out) for more information

TETHER ACCESSORIES (Order Separately)

Stainless Steel
Compression Sleeve
(AY-CS3/32)

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



Qty (10)



50 feet

Accessory	Quantity

Accessories are made for Visa Lighting canopy mount fixture applications.
If sourced elsewhere, materials must be of equivalent grade.
For important information about accessory applications and installation, see [Installation Instructions](#)

OP2140 ZUME OUT (cont.)

Finishes

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red