OP3636 LATERNA CORE

Cord and Cable Suspension



VisaLighting.com/products/Laterna

Type: Project: Location:






DIMENSIONS³

OAH MUST BE SPECIFIED

W = Width OAH = Overall Height X = Body Height Y = Diffuser Height WT = Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"


W 8" (203 mm)
OAH 48" (1219 mm)
X 15-3/8" (391 mm)
Y 12-1/4" (311 mm)
WT 12 lbs




FEATURES


- High and low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- Cast aluminum mounting component
- Tether cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Black power cord
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- Matte white acrylic diffuser or optional frosted translucent acrylic diffuser;
 UV stable; UL-94 Flame class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations

RELATIVE SCALE DRAWING



PHOTOMETRICS





White Cylinder

Frosted Cylinder



C CLISTED



Buy American Compliant


IP6

ETL Listed 5 Year Wa

OP3636 LATERNA CORE (cont.)

Cord and Cable Suspension



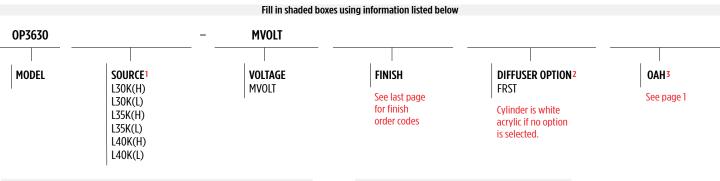

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	ССТ	Delivere	Power						
		White Cylinder	Frosted Cylinder	(Watts)					
L30K(H)	3000K	2400	2900	29					
L30K(L)	3000K	1500	1900	18					
L35K(H)	3500K	2500	3000	29					
L35K(L)	3500K	1600	1900	18					
L40K(H)	4000K	2500	3000	29					
L40K(L)	4000K	1600	1900	18					

VOLTAGE

MVOLT 120-277V, 50/60 Hz

DIFFUSER OPTION²

Cylinder is matte white if no option is selected

FRST	Frosted translucent cylinder





TETHER ACCESSORIES (Order separately)

Stainless Steel Compression Sleeve (AY-CS3/32)







50 feet

Qty (10)

Accessory Quantity

Accessories are made for Visa Lighting canopy mount fixture applications. If sourced elsewhere, materials must be of equivalent grade. For important information about accessory applications and installation, see Installation Instructions

OP3636 LATERNA CORE (cont.)

Cord and Cable Suspension



LATERNA PRODUCT FAMILY

- OP3630 Cord and Cable Suspension
- OP3632 Catenary Suspension
- OP3634 Stem Suspension

See Visalighting.com/products/Laterna for more information

SUGGESTED VARIATIONS

- · Remote driver
- Custom colors
- Longer or Shorter Diffusers (5" minimum)
- Add spun cutoff shade (shade shape similar to Rocket & Brin)

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

rowder coat raint i inisites (standard)													
AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold
GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red	-	