


# CM1972-W SYMMETRY™

## 45" General Use

U.S. Patent D822,888


[VisaLighting.com/products/Symmetry](https://VisaLighting.com/products/Symmetry)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

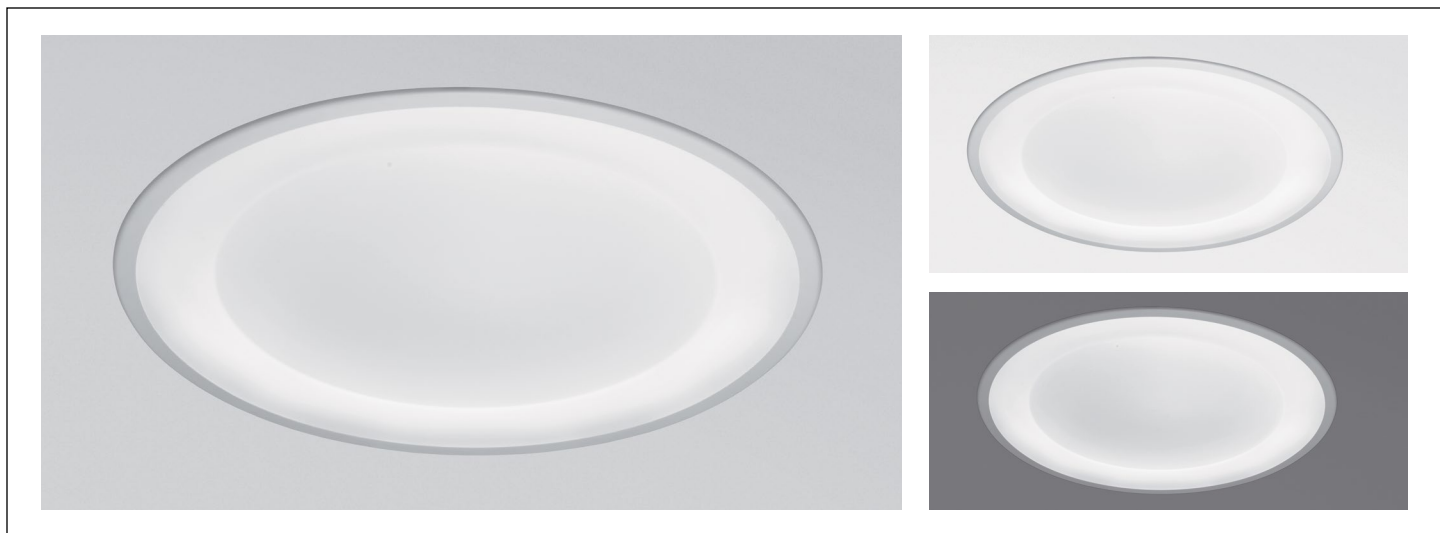



### DIMENSIONS

DIA = Diameter RD = Recessed Depth RW = Recessed Width


DIA 44-1/2" (1130 mm)

RD 6" (152 mm)

RW 44" (1118 mm)

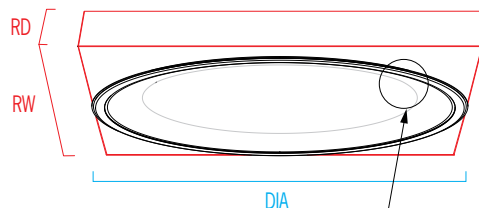


### RELATIVE SCALE DRAWING

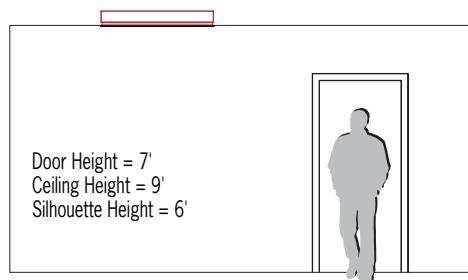

### FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver located within the housing and accessible from below the ceiling
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Optional antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

### PHOTOMETRICS



# CM1972-W SYMMETRY (cont.)

45" General Use



Fill in shaded boxes using information listed below

CM1972-W		- MVOLT				
MODEL	SOURCE <sup>1</sup>	SOURCE OPTION <sup>2</sup>	VOLTAGE MVOLT	DIMMING CONTROL <sup>3</sup>	LENS FRAME FINISH	OPTIONS <sup>4</sup>
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI  Minimum 80CRI is standard if 90CRI option is not selected		DALI ZB	See last page for finish order codes	AMC CP IEM

## SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%  
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	5200	49
L30K(L)		3100	29
L35K(H)	3500K	5200	49
L35K(L)		3100	29
L40K(H)	4000K	5400	49
L40K(L)		3200	29

## VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

## SOURCE OPTION<sup>2</sup>

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	---

## DIMMING CONTROL OPTION<sup>3</sup>

Dimmable 0-10V to 1% is standard if option is not selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI	Control via DALI protocol, dimming to minimum 1%
ZB	Wireless control, ZigBee H.A. v1.2 (Osram CLM-DIM)

## OPTIONS<sup>4</sup> (Multiple selections allowed)

AMC	Antimicrobial coating (No VOC) for painted surface
CP	Chicago Plenum Certified (suspended grid installation only)
IEM	Integral emergency driver (ambient), 10W output for 90 minutes

## TM-30 DATA

For TM-30 data please contact us at [info@visalighting.com](mailto:info@visalighting.com)

# CM1972-W SYMMETRY (cont.)

45" General Use



## SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 – 4"
Behavioral Health – Overbed	CM1976-W – 45"
	CM1986-W – 23"
Behavioral Health – General Use	CM1978-W – 45"
	CM1988-W – 23"
Behavioral Health – Tunable	CM1978-T – 45"
	CM1988-T – 23"
Overbed	CM1970-W – 45"
	CM1980-W – 23"
General Use	CM1972-W – 45"
	CM1982-W – 23"
Tunable	CM1972-T – 45"
	CM1982-T – 23"

See [Visalighting.com/Families/Symmetry](https://visalighting.com/Families/Symmetry) for more information

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. U.S. Design Patent #D822,888. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.

