

# CM1980-W SYMMETRY™

## 23" Overbed — White

U.S. Patent D822,888


[VisaLighting.com/products/Symmetry](https://VisaLighting.com/products/Symmetry)



Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




### DIMENSIONS

DIA = Diameter    RD = Recessed Depth    RW = Recessed Width

DIA	22-7/8"	(581 mm)
RD	6-1/2"	(165 mm)
RW	23-1/2"	(597 mm)




### RELATIVE SCALE DRAWING

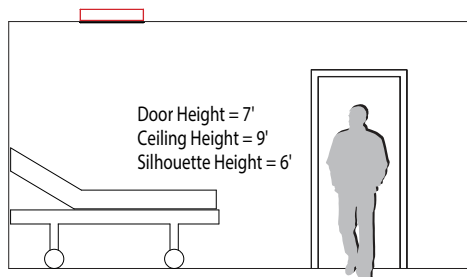

### FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver located within the housing and accessible from below the ceiling
- Low voltage patient control (LVPC-DIM) switching interface option for pillow speaker/nurse call systems
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Remote emergency driver
- Chicago Plenum certified option
- Acrylic lens and aluminum housing
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Not suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

### PHOTOMETRICS



Compliant



ETL Listed



5 Year Warranty

# CM1980-W SYMMETRY (cont.)

23" Overbed — White



Fill in shaded boxes using information listed below

## CM1980-W

### MODEL

### SOURCE<sup>1</sup>

L30K  
L35K  
L40K

### SOURCE OPTION<sup>2</sup>

90CRI

Minimum 80CRI is standard if 90CRI option is not selected

### VOLTAGE<sup>3</sup>

120V  
277V

### DIMMING CONTROL<sup>4</sup>

DALI  
LVPC-DIM

LVPC-DIM not available with DALI

### LENS FRAME FINISH

See last page for finish order codes

### OPTIONS<sup>5</sup>

CP  
NGT

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%  
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens			Max Power (Watts)
		Ambient	Exam	Combined	
L30K	3000K	4300	6800	10900	Ambient: 50W Exam: 71W Combined: 121W
L35K	3500K	4400	7000	11300	
L40K	4000K	4500	7100	11400	

Note: Fixture provided with separate ambient and exam circuits

### VOLTAGE<sup>3</sup> (Select one)

120V	120VAC, 50/60 Hz
277V	277VAC, 50/60 Hz

### SOURCE OPTION<sup>2</sup>

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	---

### DIMMING CONTROL OPTION<sup>4</sup> (Select one)

Dimmable 0-10V to 1% is standard if DALI option is not selected

⚠ Option availability may be interdependent with Voltage, Source or Other Options

DALI	Control via DALI protocol, dimming to minimum 5%
LVPC-DIM	Integral Low Voltage patient controller interface. <b>Not compatible with DALI option</b>


### OPTIONS<sup>5</sup> (Multiple selections allowed)

CP	Chicago Plenum Certified
NGT	Night light (amber)

### TM-30 DATA

For TM-30 data please contact us at [info@visalighting.com](mailto:info@visalighting.com)

## Combined Illuminance (Fc)

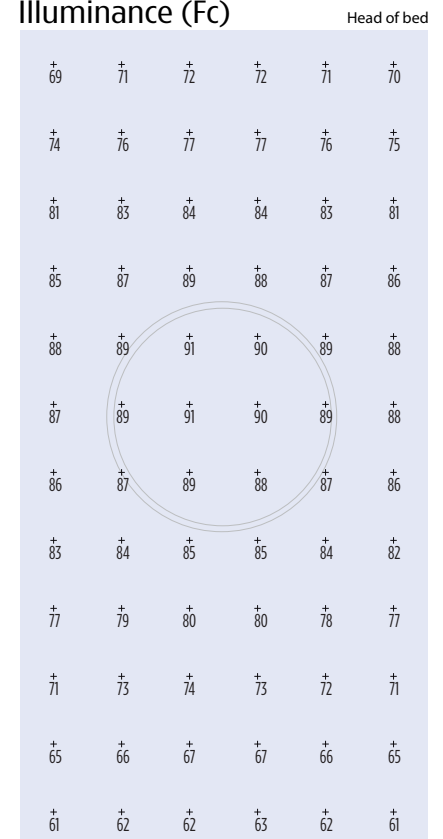

Average = 79 fc

Avg/Min = 1.29

Values are average maintained illuminance on standard twin XL bed at 3ft AFF, with fixture mounted at 9ft AFF and centered along bed with fixture center 3ft from head of bed. Room used for calculations is 12ft wide by 15ft long with 80/50/20 reflectances and LLF=0.85.

# CM1980-W SYMMETRY (cont.)

23" Overbed — White



## SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 — 4"
Behavioral Health – Overbed	CM1976-W — 45"
	CM1986-W — 23"
Behavioral Health – General Use	CM1978-W — 45"
	CM1988-W — 23"
Behavioral Health – Tunable	CM1978-T — 45"
	CM1988-T — 23"
Overbed	CM1970-W — 45"
	CM1980-W — 23"
General Use	CM1972-W — 45"
	CM1982-W — 23"
Tunable	CM1972-T — 45"
	CM1982-T — 23"

See [Visalighting.com/Families/Symmetry](https://visalighting.com/Families/Symmetry) for more information

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Siver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

