#### Rev: 2025/04/01

### CM1982-W SYMMETRY<sup>™</sup> 23" General Use — White

.....


U.S. Patent D822,888

Type:

Project:

VisaLighting.com/products/Symmetry

Location:

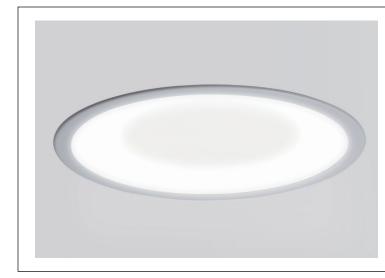


#### DIMENSIONS

DIA = Dia	meter	RD = Recessed Depth	RW = Recessed Width
DIA RD RW	22-7/8" 6-1/2" 23-1/2"		RW
5"[ 1-1/2"	Si	de View	DIA
			Lens Frame

#### **RELATIVE SCALE DRAWING**


800-788-VISA



### FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver located within the housing and accessible from below the ceiling
- Chicago Plenum certified (suspended grid mount only)
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Remote emergency driver
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

#### PHOTOMETRICS






# CM1982–W SYMMETRY (cont.) 23" General Use – White

## VISA LIGHTING

Fill in shaded boxes using information listed below

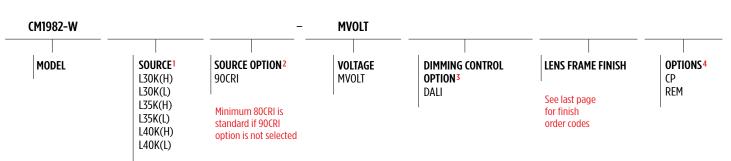

SOURCE<sup>1</sup> (Select one)

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

Dimmable 0-10V to 1%
Minimum 80CRI, within 3-step MacAdam

L30K(H)	3000K				
	JUUUK	4900	61		
L30K(L)	3000K	2900	35		
L35K(H)	3500K	5000	61		
L35K(L)	3500K	3000	35		
L40K(H)	4000K	5100	61		
L40K(L)	4000K	3000	35		

347V available upon request

#### SOURCE OPTION<sup>2</sup>

Minimum 80	inimum 80 CRI within 3-step MacAdam is standard if option is not selected							
90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)							

#### DIMMING CONTROL OPTION<sup>3</sup>

DALI	Control via DALI protocol, dimming to minimum 1%
------	--

#### OPTIONS<sup>4</sup> (Multiple selections allowed)

СР	Chicago Plenum Certified (suspended grid installation only)
REM	Remote emergency driver, 10W output for 90 minutes

#### TM-30 DATA

For TM-30 data please contact us at info@visalighting.com

# CM1982–W SYMMETRY (cont.) 23" General Use – White



#### SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 — 4"					
Behavioral Health –	CM1976-W — 45"					
Overbed	CM1986-W — 23"					
Behavioral Health –	CM1978-W — 45"					
General Use	CM1988-W — 23"					
Behavioral Health –	СМ1978-Т — 45"					
Tunable	СМ1988-Т — 23"					
Quark ad	CM1970-W — 45"					
Overbed	CM1980-W — 23"					
Comoral Illas	CM1972-W — 45"					
General Use	СМ1982-W — 23"					
Tunable	СМ1972-Т — 45"					
Tutidble	СМ1982-Т — 23"					

See Visalighting.com/Families/Symmetry for more information

#### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request. For more information about our finishes visit visalighting.com/finishes

#### Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold
GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red	-	

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.

Rev: 2025/04/01