CB3872 CORONA™


24" Sconce ADA



Visalighting.com/products/Corona

Type: Project: Location:



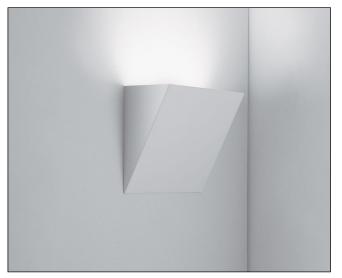


DIMENSIONS

Depth is measured from wall to front of fixture

W = Width	H = Heiaht	D = Denth


W	24"	(610 mm)
Н	8"	(203 mm)
D	4"	(102 mm)




FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Optional 90+ CRI
- Solite top lens standard
- Mounts to standard electrical junction box (by others) with provided hardware and auxiliary mounting holes
- Heavy gauge fabricated and welded housing
- No VOC powder coat paint
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING

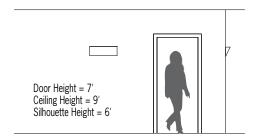

PHOTOMETRICS












CB3872 CORONA (cont.) 24" Sconce ADA



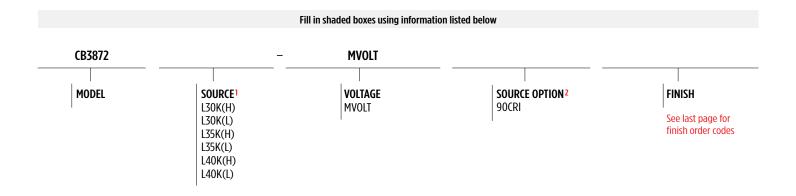

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	ССТ	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	3500	30
• L30K(L)	3000K	2300	19
L35K(H)	3500K	3500	30
L35K(L)	3500K	2300	19
• L40K(H)	4000K	3600	30
• L40K(L)	4000K	2400	19

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index 93, minimum R9 value of 50	
	(lumen output reduced by 15%)	

VOLTAGE

MVOLT	120-277V, 50/60 Hz

CB3872 CORONA (cont.) 24" Sconce ADA



CORONA PRODUCT FAMILY

- CB3801 12" Sconce
- CB3804 24" Sconce
- CB3870 12" Sconce ADA
- CB3872 24" Sconce ADA

See Visalighting.com/products/Corona for more information

SUGGESTED VARIATIONS

- 2700K
- Custom color or material
- Special mounting capabilities
- Various fabricated housing profiles

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

