


CB6458 BOWE™

41" Sconce


[Visalighting.com/products/Bowe](https://visalighting.com/products/Bowe)

Type: _____ Project: _____ Location: _____

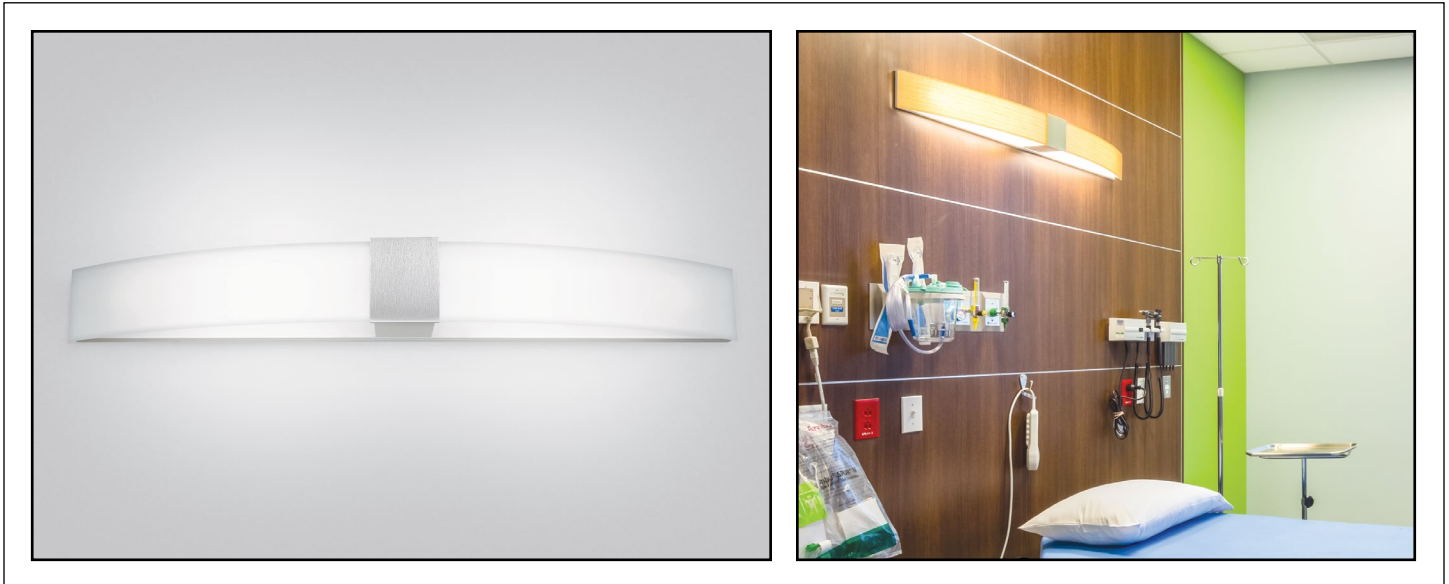


DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth


W 41" (1041 mm)
H 4-3/4" (121 mm)
D 5-1/2" (140 mm)




FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver
- Modular design for replacement of LED source and driver
- Optional 90+ CRI (delivered lumens reduced by 15%)
- Mounts over standard electrical junction box (by others) with provided hardware
- Heavy gauge fabricated metal backbox; 1/8" thick solid metal center trim plate
- Fabricated 1/8" thick white acrylic diffuser with matte finish is standard
 - UV stable
 - UL-94HB flame class rated
- Optional specialty diffuser materials, including some Lumicor® materials
- No VOC powder coat paint finish; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications.

RELATIVE SCALE DRAWING

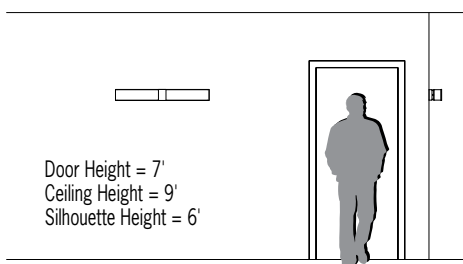

PHOTOMETRICS

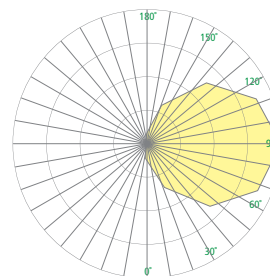

CB6458 BOWE (cont.)

41" Sconce

Fill in shaded boxes using information listed below

CB6458	-	MVOLT				
MODEL	SOURCE ¹	VOLTAGE MVOLT	SOURCE OPTION ² 90CRI	FINISH	DIFFUSER OPTION ³	OPTION(S) ⁴
	<ul style="list-style-type: none"> • L30K(H) • L30K(L) • L35K(H) • L35K(L) • L40K(H) • L40K(L) 		Minimum 80CRI is standard if option is not selected	See last page for finish order codes	<ul style="list-style-type: none"> • ABA • KA • OLIN • SL 	DCC XPS

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	5400	46
• L30K(L)	3000K	3200	26
L35K(H)	3500K	5400	46
L35K(L)	3500K	3200	26
• L40K(H)	4000K	5500	46
• L40K(L)	4000K	3300	26

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------


SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index 93, minimum R9 value of 50 (lumen output reduced by 15%)
-------	--

DIFFUSER OPTION³

• ABA	Hand Painted Alabaster Alternative
• KA	Kauri Lumicor
• OLIN	Oyster Linen Lumicor
• SL	Silver Spun Lumicor

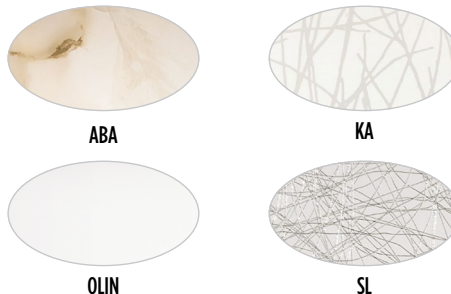OPTIONS⁴

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

CB6458 BOWE (cont.)

41" Sconce



BOWE PRODUCT FAMILY

- CB6456 - 33" Sconce
- CB6458 - 41" Sconce

See [Visalighting.com/products/Bowe](https://visalighting.com/products/Bowe) for more information

SUGGESTED VARIATIONS

- Vertical mount
- 2700K source
- Different Lumicor options

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)


BA Brushed Aluminum

BB Brushed Brass

