


# CB7000 BLISS ROUND™

Luminous Round ADA Sconce



[Visalighting.com/products/Bliss-Round](https://visalighting.com/products/Bliss-Round)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

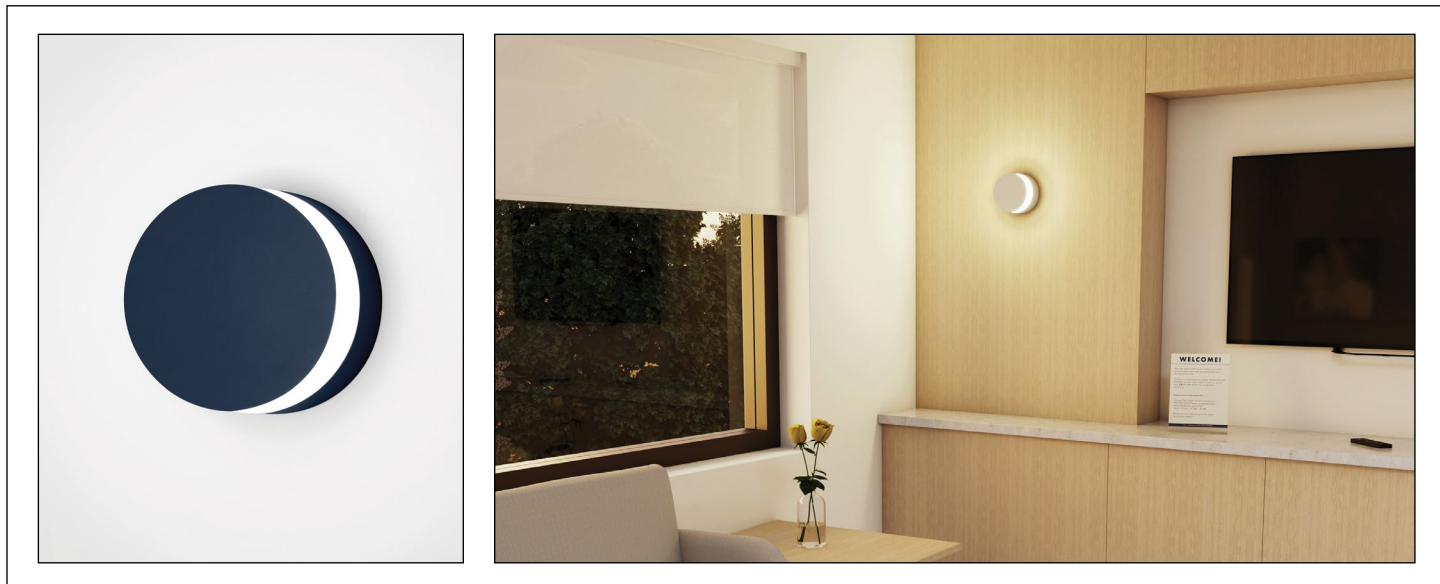


## DIMENSIONS

Depth is measured from wall to front of fixture

DIA = Diameter D = Depth

DIA 6-1/8" (156 mm)


D 3-7/8" (98 mm)




## FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Aluminum housing and front fascia
- Seamless, extruded acrylic luminous diffuser
- Optional 90CRI source
- Static white and dim-to-warm source options
- Dimmable using 0-10V or phase-cut controls
- Mounts to standard 4" junction box (by others)
- ADA compliant
- Smooth outer surfaces for improved cleanability
- Optional antimicrobial coating on powder coated surfaces
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suitable for exterior applications

## RELATIVE SCALE DRAWING

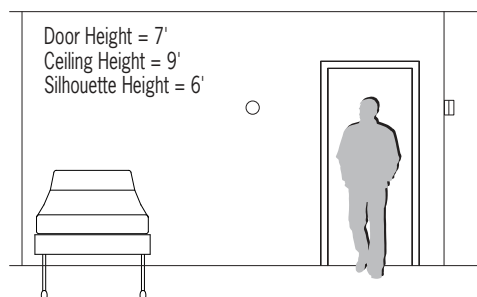

## PHOTOMETRICS



Compliant



ADA Compliant



ETL Listed



5 Year Warranty

# CB7000 BLISS ROUND (cont.)

Luminous Round ADA Sconce



Fill in shaded boxes using information listed below

CB7000	-	MVOLT			
MODEL	SOURCE <sup>1</sup>	VOLTAGE MVOLT	SOURCE OPTION <sup>2</sup> 90CRI	FINISH	OPTION <sup>3</sup> AMC
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) L1830DW(H) L1830DW(L) L2740DW(H) L2740DW(L)			See last page for finish order codes  *Anti-microbial coating on GLWT and VBLK changes finish texture. Please contact factory	

## SOURCE<sup>1</sup> (Select one)

Dimmable 0–10V to 1%, Minimum 80CRI, within 3–step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	1450	19
L30K(L)	3000K	1050	13
L35K(H)	3500K	1500	19
L35K(L)	3500K	1050	13
L40K(H)	4000K	1550	19
L40K(L)	4000K	1100	13
L1830DW(H)	1800K-3000K	1100	20
L1830DW(L)	1800K-3000K	750	14
L2740DW(H)	2700K-4000K	1200	20
L2740DW(L)	2700K-4000K	850	14

90CRI option (for LxxK options only) reduces lumen output by 12%.

Dim to warm (LxxxxDW options) are 90CRI standard

## SOURCE OPTION<sup>2</sup>

90CRI	Minimum 90CRI, minimum R9 value of 50
-------	---------------------------------------

Dim to warm (LxxxxDW options) are 90CRI standard

## OPTION<sup>3</sup>

⚠ Option availability may be interdependent with Other Options

AMC	Anti-microbial clear coat (non-VOC)
-----	-------------------------------------

## VOLTAGE

MVOLT	120–277V, 50/60 Hz
-------	--------------------

## LUMEN MAINTENANCE RATING

L85 (reported)	≥55,000 hrs
----------------	-------------

Reported Lifetime per IES TM-21

# CB7000 BLISS ROUND

## Luminous Round ADA Sconce



### BLISS PRODUCT FAMILY

<b>BLISS ROUND Sconce</b>	• <a href="#">CB7000</a>
<b>BLISS SQUARE Sconce</b>	• <a href="#">CB7010</a>

See [Visalighting.com/products/Bliss-Round](https://visalighting.com/products/Bliss-Round) for more information






### SUGGESTED VARIATIONS

- Increase fixture diameter
- Custom output or color temps
- Custom powder coat color
- Backlit custom cutout on front for wayfinding

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

\*Anti-microbial coating on GLWT and VBLK changes finish texture. Please contact factory

