

CB7010 BLISS SQUARE™

Luminous Square ADA Sconce



Visalighting.com/products/Bliss-Square

Type: _____ Project: _____ Location: _____



DIMENSIONS


Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W 4-3/4" (121 mm)

H 4-3/4" (121 mm)


D 3-7/8" (98 mm)




FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Aluminum housing and front fascia
- Seamless, extruded acrylic luminous diffuser
- Optional 90CRI source
- Static white and dim-to-warm source options
- Dimmable using 0-10V or phase-cut controls
- Mounts to standard 4" junction box (by others)
- ADA compliant
- Smooth outer surfaces for improved cleanability
- Optional antimicrobial coating on powder coated surfaces
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

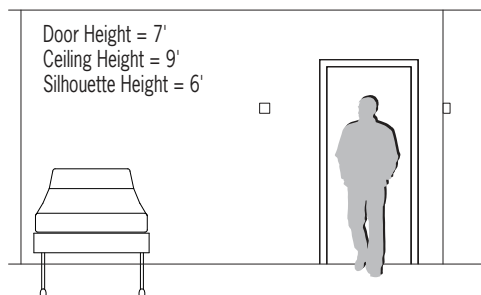

PHOTOMETRICS



Compliant



ADA Compliant



ETL Listed



5 Year Warranty

CB7010 BLISS SQUARE (cont.)

Luminous Square ADA Sconce



Fill in shaded boxes using information listed below

CB7010	-	MVOLT			
MODEL	SOURCE ¹	VOLTAGE MVOLT	SOURCE OPTION ² 90CRI	FINISH	OPTION ³ AMC
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) L1830DW(H) L1830DW(L) L2740DW(H) L2740DW(L)			See last page for finish order codes *Anti-microbial coating on GLWT and VBLK changes finish texture. Please contact factory	

SOURCE ¹ (Select one)

Dimmable 0–10V to 1%, Minimum 80CRI, within 3–step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	1600	19
L30K(L)	3000K	1100	13
L35K(H)	3500K	1600	19
L35K(L)	3500K	1150	13
L40K(H)	4000K	1650	19
L40K(L)	4000K	1150	13
L1830DW(H)	1800K-3000K	1200	20
L1830DW(L)	1800K-3000K	825	14
L2740DW(H)	2700K-4000K	1250	20
L2740DW(L)	2700K-4000K	950	14

-90CRI option (for LxxK options only) reduces lumen output by 12%.

Dim to warm (LxxxxDW options) are 90CRI standard

SOURCE OPTION ²

90CRI	Minimum 90CRI, minimum R9 value of 50
-------	---------------------------------------

Dim to warm (LxxxxDW options) are 90CRI standard

OPTION ³

⚠ Option availability may be interdependent with Other Options

AMC	Anti-microbial clear coat (non-VOC)
-----	-------------------------------------

VOLTAGE

MVOLT	120–277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L85 (reported)	≥55,000 hrs
----------------	-------------

Reported Lifetime per IES TM-21

CB7010 BLISS SQUARE (cont.)

Luminous Square ADA Sconce



BLISS PRODUCT FAMILY

BLISS ROUND Sconce	• CB7000
BLISS SQUARE Sconce	• CB7010

SUGGESTED VARIATIONS

- Custom output or color temps
- Custom powder coat color
- Backlit custom cutout on front for wayfinding

See [Visalighting.com/products/Bliss-Square](https://visalighting.com/products/Bliss-Square) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

*Anti-microbial coating on GLWT and VBLK changes finish texture. Please contact factory

