

# CM1830 OMNIENCE™

## 26" Diameter - Ceiling Surface Mount


[Visalighting.com/products/Omnience](http://Visalighting.com/products/Omnience)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



### DIMENSIONS

W = Width    H = Height    X = Body Height


W    26" (660 mm)  
H    10-5/8" (270 mm)  
X    6-3/4" (171 mm)

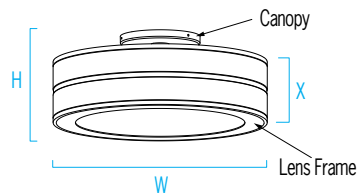


### FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) to structural blocking (by others) with provided hardware
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
  - UV stable
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

### RELATIVE SCALE DRAWING

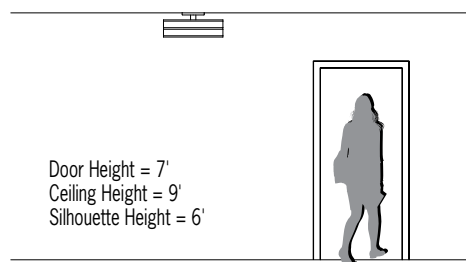

### PHOTOMETRICS

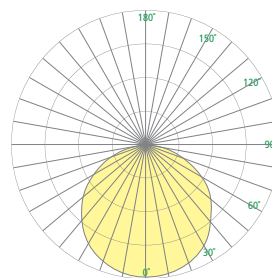

# CM1830 OMNIENCE (cont.)

## 26" Diameter - Ceiling Surface Mount



Fill in shaded boxes using information listed below

CM1830		-	MVOLT						
MODEL	SOURCE <sup>1</sup>		VOLTAGE	FINISH		DIFFUSER <sup>2</sup>		OPTION <sup>3</sup>	
	<ul style="list-style-type: none"> <li>L30K</li> <li>L35K</li> <li>L40K</li> </ul>		MVOLT	See last page for finish order codes		IRP		XPS	

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	9300	110
L35K	3500K	9300	110
• L40K	4000K	9600	110

### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

### DIFFUSER OPTIONS<sup>2</sup>

Diffuser is matte white acrylic

IRP	Impact resistant polycarbonate lens
-----	-------------------------------------

### OPTIONS<sup>3</sup> (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

# CM1830 OMNIENCE (cont.)

## 26" Diameter - Ceiling Surface Mount



### OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• <a href="#">CP3970</a>
	34" Diameter	• <a href="#">CP3975</a>
	48" Diameter	• <a href="#">CP3995</a>
Stem	26" Diameter	• <a href="#">CP3980</a>
	34" Diameter	• <a href="#">CP3985</a>
	48" Diameter	• <a href="#">CP3990</a>
Ceiling Mount	26" Diameter	• <a href="#">CM1830</a>

### SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

