

# CM1901 UNITY™

## 2' x 2' Overbed sans Reading

U.S. Patent D729,436


[Visalighting.com/products/Indoor/Unity](http://Visalighting.com/products/Indoor/Unity)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



### DIMENSIONS


W = Width L = Length D = Depth RD = Recessed Depth

W	23-5/8" (600 mm)
L	23-5/8" (600 mm)
D	1-7/8" (48 mm)
RD	3-1/2" (89 mm)

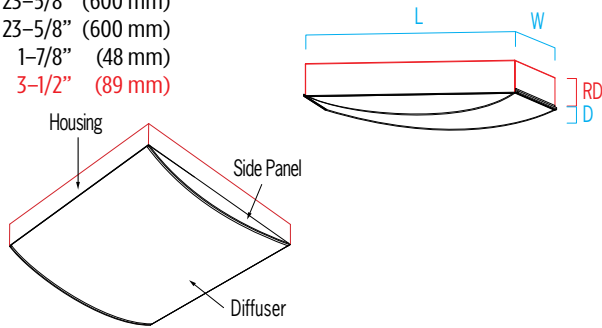

Housing is painted white


### RELATIVE SCALE DRAWING

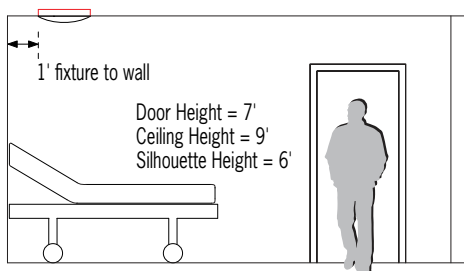

### FEATURES

- Driver replacement is plenum non-invasive
- Optional 90+ CRI
- Amber night light option to minimize patient disturbance
- Dimming/switching interface accessory available for pillow speaker/nurse call systems (see page 2)
- 3-1/2" recessed depth minimizes interference with systems within ceiling plenum
- Captive swing down lenses with spring loaded thumb latches for toolless access
- Luminous side panels are matte white acrylic
- Easy to clean fabric look of OLIN Lumicor™ acrylic diffuser or matte white acrylic diffuser coordinates with Unity wall fixtures
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- Recessed housing and accent panel are painted white
- ETL listed for damp locations. Not suitable for exterior applications

### PHOTOMETRICS



Ambient



# CM1901 UNITY (cont.)

## 2' x 2' Overbed sans Reading

Fill in shaded boxes using information listed below

CM1901					
MODEL	SOURCE <sup>1</sup>	VOLTAGE <sup>2</sup>	SOURCE OPTION(S) <sup>3</sup>	DIFFUSER <sup>4</sup>	OPTION(S) <sup>5</sup>
	<ul style="list-style-type: none"> <li>• L30K(H)</li> <li>• L30K(L)</li> <li>• L35K(H)</li> <li>• L35K(L)</li> <li>• L40K(H)</li> <li>• L40K(L)</li> </ul>	MVOLT 20V 277V	90CRI NGT  90CRI option reduces lumen output by 5%	MWAC • OLIN	CP NAF SRI XPS

SOURCE<sup>1</sup> (Select one)

Dimmable 0–10V to 1%, Minimum 80CRI, within 3–step MacAdam

Source	CCT	Ambient		Exam		Exam High	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	2300	22	7100	69	9400	91
• L30K(L)	3000K	2300				2300	22
L35K(H)	3500K	2400		7300	69	9700	91
L35K(L)	3500K	2400				2400	22
• L40K(H)	4000K	2400		7400	69	9800	91
• L40K(L)	4000K	2400				2400	22

Note: Fixture provided with separate ambient and exam circuits

VOLTAGE<sup>2</sup> (Select one)

MVOLT	120V–277V, 50/60 Hz
120V	120V, 50/60 Hz
277V	277V, 50/60 Hz

SOURCE OPTIONS<sup>3</sup> (Multiple selections allowed)

90CRI	Color rendering index 93; minimum R9 value of 50 (lumen output reduced by 5%) Minimum 80CRI within 3–step MacAdam is standard if option is not selected
NGT	Night Light (amber)

DIFFUSERS<sup>4</sup> (Select one)

MWAC	Matte White Acrylic
• OLIN	Lumicor Oyster Linen Acrylic

OPTIONS<sup>5</sup> (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

CP	Chicago Platinum certified
NAF	Negative airflow, consult factory
SRI	Drywall installation kit
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

ACCESSORY (Order Separately)

LVPC-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of 1 switch per zone (by others), mounts in electrical box (by others)
----------	---


# CM1901 UNITY (cont.)

## 2' x 2' Overbed sans Reading




### MULTI-LEVEL SWITCHING

2 or 3 discrete circuits accommodate multi-level switching – reading, ambient and exam



### ILLUMINANCE (Fc)

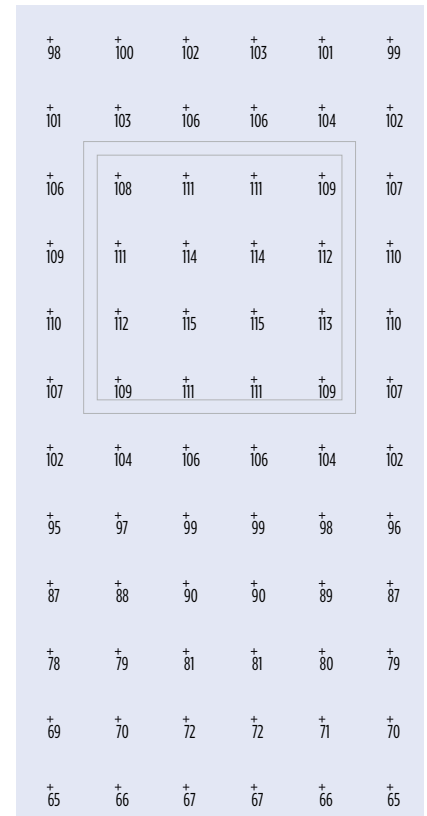

Average = 96.0  
 Maximum = 115  
 Minimum = 65.0  
 Avg/Min Ratio = 1.5  
 Max/Min Ratio = 1.8

### TM-30 DATA

For TM-30 data please contact us at [info@visalighting.com](mailto:info@visalighting.com)

## UNITY PRODUCT FAMILY

Wall Sconce	12"	ADA	CB1900
Wall Sconce	12" (Top and Bottom Lens)		CB1902
Headwall	49"		CB1904
Wall Slot Lights	3" Wall Slot	White	CB1911-W
		Tunable	CB1911-T
Overbed	24" x 24"	With Reading	CM1900
		Without Reading	CM1901
	24" x 48"	Dual Lens	CM1906
	24" x 48"	Single Lens	CM1907
	9" x 48"	Tandem	CM1912
Overbed Slots	3" Dual Overbed Slots	White	CM1910-W
		Tunable	CM1910-T
	3" Single Ceiling Unit	White	CM1911-W
		Tunable	CM1911-T
Table Lamp	Fixed Base		TF1904
	Freestanding		TF1906
	Charging Base		TF1908

## SUGGESTED VARIATIONS

- Lumen adjustments
- Alternative Lumicor diffuser
- Non-luminous diffuser side panels
- Alternative accent finish

See [Visalighting.com/families/Unity](https://visalighting.com/families/Unity) for more information