

CM1910-W UNITY™ SLOT

3" Dual Overbed Units


VisaLighting.com/Families/Unity

Type: _____ Project: _____ Location: _____





Set includes 2 units in tandem. Order one model number per set


DIMENSIONS

W = Weight L = Length D = Depth RD = Recessed Depth

W	3"	(76 mm)
L	47-3/4"	(1213 mm)
D	4"	(102 mm)
RD	4"	(102 mm)




RELATIVE SCALE DRAWING

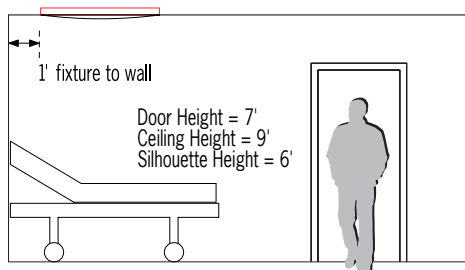


FEATURES

- Integral drivers
- Optional 90+ CRI
- Dimming/switching interface accessory available for pillow speaker/nurse call systems
- Left and right models wired discretely; units may be wired together in the field
- Chicago Plenum certified
- Recessed depth minimizes interference with systems within ceiling plenum
- Formed acrylic lenses
- Snap-in acrylic lens for tool-less access
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS

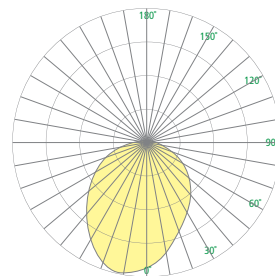

Ambient



Ambient and Exam

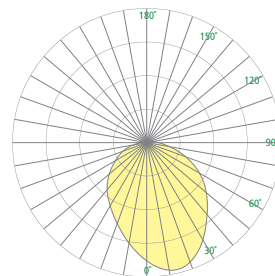

Exam



Compliant



ETL Listed



5 Year Warranty

CM1910-W UNITY SLOT (cont.)

3" Dual Overbed Units



Sold Only as a Dual Overbed Set (Set includes two units in tandem)

Fill in shaded boxes using information listed below

CM1910-W

MODEL

SOURCE¹

L30K
L35K
L40K

SOURCE OPTION²

90CRI

Minimum 80CRI is
standard if option
is not selected

VOLTAGE³

347V
MVOLT

DIMMING CONTROL⁴

OPTION
DALI

FINISH

(for FLGD option)

See last page
for finish
order codes

MOUNTING⁵

FLGD (select finish)
SBAR
TBAR

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	Delivered Lumens		
	Ambient	Exam	Combined
L30K	5300	7600	12700
L35K	5400	7800	13100
L40K	5600	8000	13400
Power (Watts)	57	89	144

Note: Fixture provided with separate ambient and exam circuits

VOLTAGE³ (Select one)

MVOLT	120-277V, 50/60 Hz
347V	347V, 50/60 Hz

SOURCE OPTION²

80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	---

DIMMING CONTROL OPTION⁴

▲ Option availability may be interdependent with Voltage, Source or Other Options

Dimmable to 1% if no dimming option is selected

DALI	Control via DALI protocol, dimming to minimum 1% (not available with 347V)
------	--

MOUNTING⁵ (Select one)

FLGD	Flanged drywall ceiling (Select finish color)
SBAR	Screw-slot lay-in t-grid ceiling
TBAR	9/16" and 15/16" standard lay-in t-grid ceiling

ACCESSORY (Order separately)

LVPC-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of one switch per zone (by others), mounts in electrical box (by others). Not compatible with -DALI option
----------	---

CM1910-W UNITY SLOT (cont.)

3" Dual Overbed Units



UNITY SLOT PRODUCT FAMILY

Wall Units	<ul style="list-style-type: none"> • CB1911-T — 3" Tunable Slot Sconce • CB1911-W — 3" Slot Sconce
Ceiling Mount Units	<ul style="list-style-type: none"> • CM1910-W — 3" Tandem Overbed Units • CM1910-T — 3" Tunable Tandem Overbed Units • CM1911-W — 3" Single Slot Ceiling Unit • CM1911-T — 3" Tunable Slot Ceiling Unit

See [Visalighting.com/families/Unity-Healthcare-Lighting](https://visalighting.com/families/Unity-Healthcare-Lighting) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

