


# CM1922 SERENITY™

2' x 2' Behavioral Health/High Abuse Overbed



[VisaLighting.com/products/indoor/Serenity](https://VisaLighting.com/products/indoor/Serenity)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

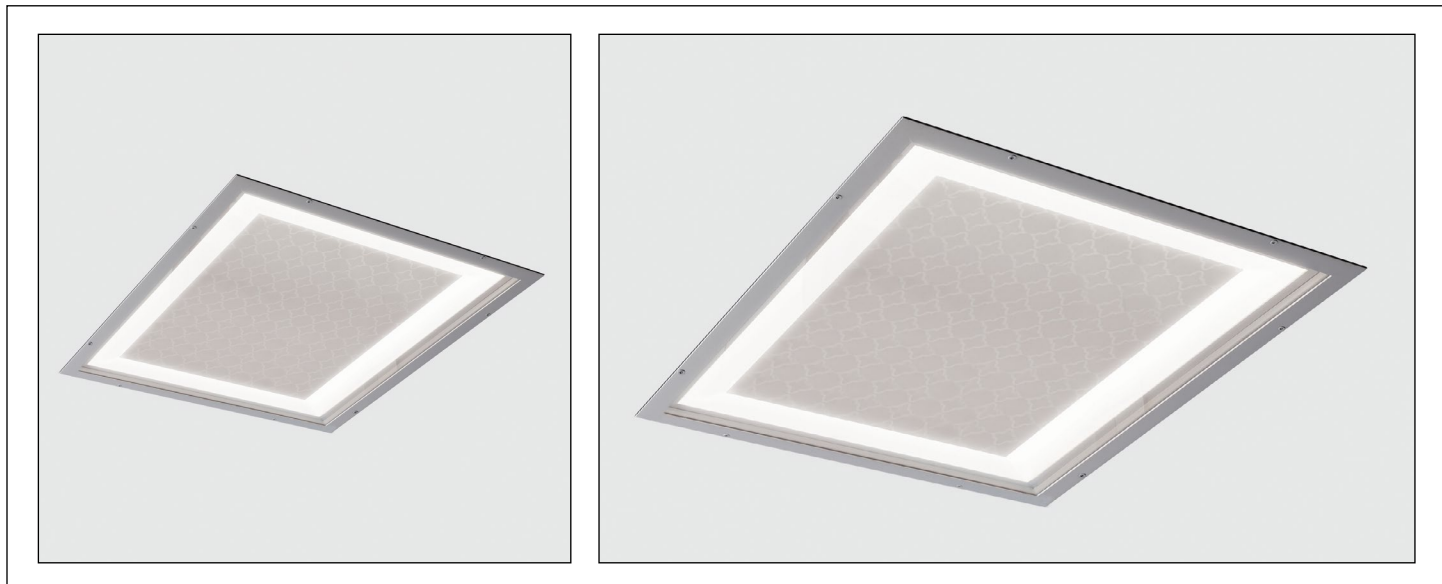



## DIMENSIONS

W = Width L = Length RD = Recessed Depth

W 25-1/8" (638 mm)

L 25-1/8" (638 mm)


RD 3-1/2" (89 mm)

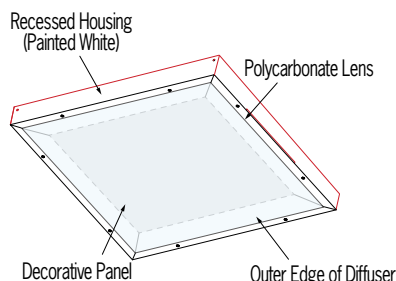


## FEATURES

- Driver located within the housing and accessible from below the ceiling
- Low voltage patient control (LVPC-DIM) switching interface accessory available for pillow speaker/nurse call systems (order separately – see page 2)
- Suitable for behavioral healthcare applications
- Amber night light option to minimize patient disturbance
- Behavioral health/high abuse lens and frame features 1/8" thick, high impact clear polycarbonate secured with tamper resistant fasteners; ligature resistant (sheetrock/drywall installation only)
- Shallow recessed depth minimizes interference with systems within ceiling plenum
- Housing is white (no VOC) powder coat paint
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- Outer edge of diffuser (source of light) is high transmittance matte white acrylic
- Decorative panel – choose from four calming patterns or design your own custom pattern
- ETL listed for damp locations. Not suited for exterior applications

## RELATIVE SCALE DRAWING

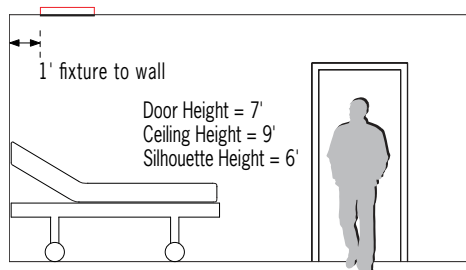

## PHOTOMETRICS



Reading, Ambient, & Exam



Compliant



ETL Listed



5 Year Warranty

# CM1922 SERENITY (cont.)

## 2' x 2' Behavioral Health/High Abuse Overbed



Fill in shaded boxes using information listed below

CM1922		—							
MODEL	SOURCE <sup>1</sup>	VOLTAGE <sup>2</sup>	SOURCE OPTION(S) <sup>3</sup>	DECORATIVE PANEL <sup>4</sup>	DRIVER <sup>5</sup>	OPTION(S) <sup>6</sup>			
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	MVOLT 120V 277V	NGT	ESS ORB VCT VEN	RMD Integral drivers if “RMD” is not selected	CP NAF			

SOURCE<sup>1,2</sup> (Select one)

Dimmable 0-10V to 1%, 90CRI standard, within 3-step MacAdam

Source	CCT	Reading		Ambient		Exam		Total		Voltage
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	
L30K(H)	3000K	2700	47	2200	29	5400	97	10300	173	120V or 277V
L30K(L)	3000K	2700		2200				4900	76	MVOLT
L35K(H)	3500K	2700		2200		5500	97	10400	173	120V or 277V
L35K(L)	3500K	2700		2200				4900	76	MVOLT
L40K(H)	4000K	2800		2300		5600	97	10700	173	120V or 277V
L40K(L)	4000K	2800		2300				5100	76	MVOLT

SOURCE OPTIONS<sup>3</sup>

NGT	Night Light (amber)
-----	---------------------

DECORATIVE PANEL<sup>4</sup> (Select one)

ORB and VEN options not recommended for behavioral health applications

ESS	Essence	VCT	Vector
ORB	Orbit	VEN	Venture



ESS



ORB



VCT




VEN

OPTIONS<sup>6</sup> (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

CP	Chicago Platinum certified
NAF	Ceiling plane sealing gasket

LIGHTING COMPONENT LOCATIONS

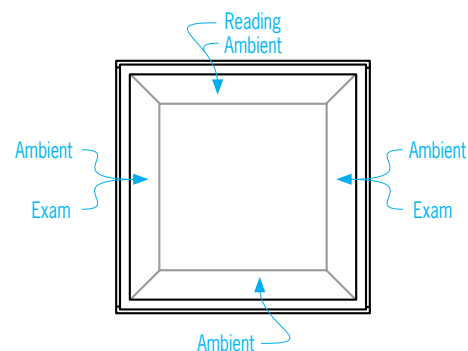

ACCESSORY (Order Separately)

LVPC-DIM	Low voltage patient control interface (3 load with dimming) requires minimum of 1 switch per zone (by others), mounts in electrical box (by others)
----------	---

# CM1922 SERENITY (cont.)

## 2' x 2' Behavioral Health/High Abuse Overbed



### SERENITY PRODUCT FAMILY

Wall Sconce	ADA		• CB1930
Headwall			• CB1934
Overbed	Behavioral Health/ High Abuse	24" x 24"	• CM1922
		24" x 48"	• CM1924
	Tandem	12" x 48"	• CM1930
		24" x 24"	• CM1938
		24" x 48"	• CM1946
Table Lamp	Fixed Base		• TF1930
	Freestanding		• TF1932
	Charging Base		• TF1934

### SUGGESTED VARIATIONS

- Custom graphic for decorative panel
- Alternate finish
- Increase or decrease fixture height or width

See [Visalighting.com/families/Serenity-lighting](https://visalighting.com/families/Serenity-lighting) for more information

