


CM1972-W SYMMETRY™

45" General Use

U.S. Patent D822,888


VisaLighting.com/products/Symmetry

Type: _____ Project: _____ Location: _____

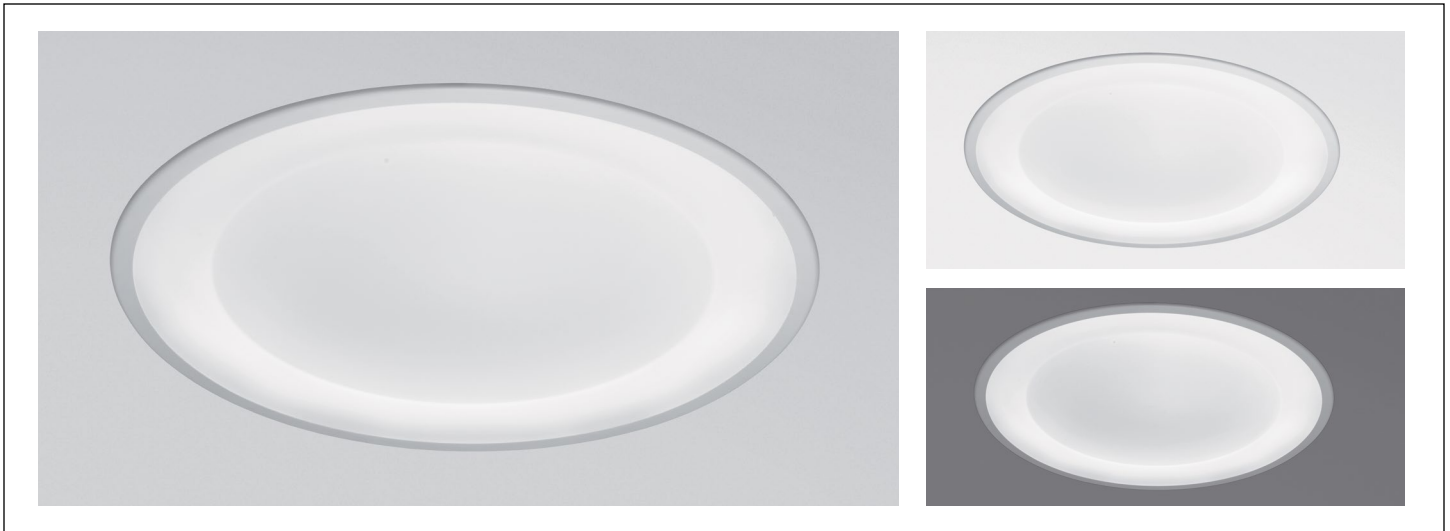


DIMENSIONS

DIA = Diameter RD = Recessed Depth RW = Recessed Width


DIA 44-1/2" (1130 mm)

RD 6" (152 mm)

RW 44" (1118 mm)

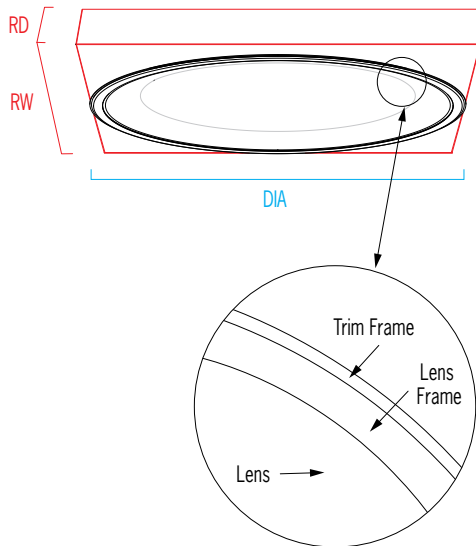


RELATIVE SCALE DRAWING

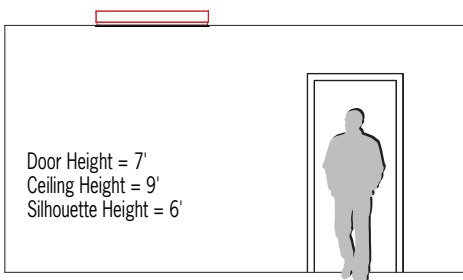

FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver located within the housing and accessible from below the ceiling
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Suitable for drywall/sheetrock or T-bar grid system (see installation instructions)
- Suitable for insulation contact
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Optional antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS



Compliant



ETL Listed



5 Year Warranty

CM1972-W SYMMETRY (cont.)

45" General Use



Fill in shaded boxes using information listed below

CM1972-W						
MODEL	SOURCE ¹	SOURCE OPTION ²	VOLTAGE	DIMMING CONTROL ³	LENS FRAME FINISH	OPTIONS ⁴
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI Minimum 80CRI is standard if 90CRI option is not selected	MVOLT	DALI	See last page for finish order codes	AMC CP IEM

SOURCE¹ (Select one)

Dimmable 0-10V to 1%
Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	5200	49
L30K(L)		3100	29
L35K(H)	3500K	5200	49
L35K(L)		3100	29
L40K(H)	4000K	5400	49
L40K(L)		3200	29

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

SOURCE OPTION²

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)
-------	---

DIMMING CONTROL OPTION³

Dimmable 0-10V to 1% is standard if option is not selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI	Control via DALI protocol, dimming to minimum 1%
------	--

OPTIONS⁴ (Multiple selections allowed)

AMC	Antimicrobial coating (No VOC) for painted surface
CP	Chicago Plenum Certified (suspended grid installation only)
IEM	Integral emergency driver (ambient), 10W output for 90 minutes

TM-30 DATA

For TM-30 data please contact us at info@visalighting.com

CM1972-W SYMMETRY (cont.)

45" General Use



SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 – 4"
Behavioral Health – Overbed	CM1976-W – 45"
	CM1986-W – 23"
Behavioral Health – General Use	CM1978-W – 45"
	CM1988-W – 23"
Behavioral Health – Tunable	CM1978-T – 45"
	CM1988-T – 23"
Overbed	CM1970-W – 45"
	CM1980-W – 23"
General Use	CM1972-W – 45"
	CM1982-W – 23"
Tunable	CM1972-T – 45"
	CM1982-T – 23"

See [Visalighting.com/Families/Symmetry](https://visalighting.com/Families/Symmetry) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. U.S. Design Patent #D822,888. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.

