Rev: 2025/05/27

CM1988-W SYMMETRY

Behavioral Health/High Abuse — 23" General Use - White

U.S. Patent D822.888

Type:

```
Project:
```

Location:




DIMENSIONS

DIA 23-1/2" (597 mm) RD 5" (127 mm) (no insulation detector required) RW 23-1/2" (597 mm) RW	
RD	
Fixture Support Fi (by others)	rame
Sheetrock	
Trim Frame DIA Lens Fran	
RD Lens	
RELATIVE SCALE DRAWING	

FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Integral driver located within the housing and accessible from below the ceiling
- Remote emergency driver
- Optional 90+ CRI (delivered lumens reduced by 5%)
- Suitable for insulation contact
- High Abuse lens and frame features 3/16" thick, high impact clear polycarbonate secured with tamper resistant fasteners; tested to >100 joules impact
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation
- Recyclable aluminum housing
- Frosted acrylic lens uniquely formed in a gentle concave profile with graceful, shallow dome in the center (patent pending)
- No VOC powder coat paint finish
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS







ETL Listed 5 Year Warranty

Door Height = 7' Ceiling Height = 9' Silhouette Height = 6'




VisaLighting.com/products/Symmetry

Rev: 2025/05/27

CM1988-W SYMMETRY (cont.) Behavioral Health/High Abuse — 23" General Use - White



Fill in shaded boxes using information listed below

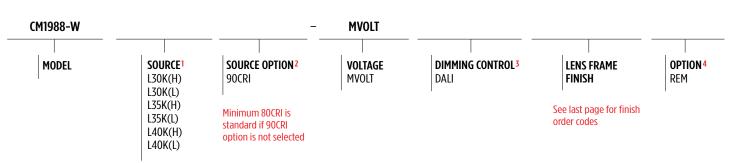

SOURCE¹ (Select one)

Dimmable 0-10V to 1% Minimum 80CPL within 3-stop MacAdar

Minimum	80CRI,	within	3-step	MacAdam

ССТ	Delivered Lumens	Power (Watts)		
3000K	4400	61		
3000K	2600	35		
3500K	4500	61		
3500K	2700	35		
4000K	4600	61		
4000K	2700	35		
	3000K 3000K 3500K 3500K 4000K	3000K 4400 3000K 2600 3500K 4500 3500K 2700 4000K 4600		

347V available upon request

SOURCE OPTION²

Minimum 80 CRI within 3-step MacAdam is standard if option is not selected

90CRI Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 5%)

DIMMING CONTROL OPTION³

Dimmable 0-10V to 1% is standard if DALI option is not selected

A Option availability may be interdependent with Voltage, Source or Other Options

DALI Control via DALI protocol, dimming to minimum 1%

OPTION⁴

REM Remote emergency driver, 10W output for 90 minutes

TM-30 DATA

For TM-30 data please contact us at info@visalighting.com

VOLTAGE

MVOLT	120-277V, 50/60 Hz

CM1988-W SYMMETRY (cont.) Behavioral Health/High Abuse — 23" General Use - White



SYMMETRY PRODUCT FAMILY

Behavioral Health – 4" Downlight	CM2500 — 4"				
Behavioral Health – Overbed	CM1976-W — 45"				
	CM1986-W — 23"				
Behavioral Health – General Use	CM1978-W — 45"				
	CM1988-W — 23"				
Behavioral Health –	СМ1978-Т — 45"				
Tunable	СМ1988-Т — 23"				
	СМ1970-W — 45"				
Overbed	СМ1980-W — 23"				
a	СМ1972-W — 45"				
General Use	СМ1982-W — 23"				
Tunable	СМ1972-Т — 45"				
TUTIADIe	СМ1982-Т — 23"				

See Visalighting.com/Families/Symmetry for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are available upon request. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold
GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red	-	

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.

