

# CM2062-T LENGA™

## 3" Dual Overbed Units – Behavioral Health – Tunable


[VisaLighting.com/products/Lenga](https://VisaLighting.com/products/Lenga)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_





SET INCLUDES 2 UNITS IN TANDEM. ORDER ONE MODEL NUMBER PER SET.

### DIMENSIONS

W = Width L = Length RD = Recessed Depth RL = Recessed Length


W	4-5/8"	(117 mm)
L	48-1/8"	(1222 mm)
RD	4-1/8"	(105 mm)
RL	47"	(1197 mm)

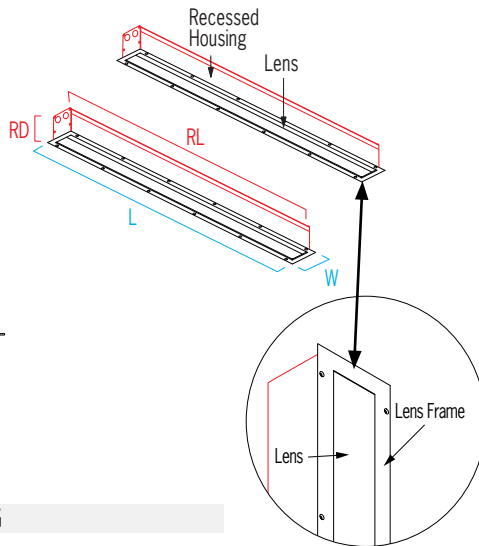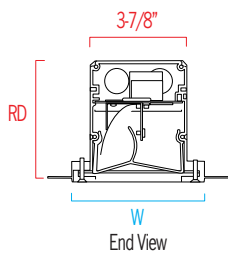


### FEATURES

- Integral drivers
- 90+ CRI
- Left and right models wired discretely; units may be wired together in the field
- Recessed housing, conduit entry
- Pin-in-Torx screws standard for lens door
- Ligature resistant; sheetrock/drywall installation (see installation instructions), not suited for grid ceiling installation. Housing integrates with drywall ceilings via mud flange
- High Abuse lens and frame features high impact clear polycarbonate secured with tamper resistant fasteners
- Sealed, gasketed lens
- Housing is fully sealed from plenum and room sides
- IP65 rated
- Chicago Plenum certified
- Not suitable for insulation contact
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- Not suited for exterior applications
- Accepted by New York State Office of Mental Health (NYS-OMH)

### RELATIVE SCALE DRAWING

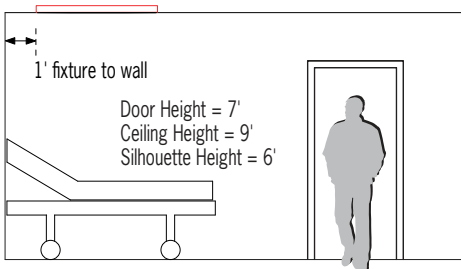

### PHOTOMETRICS

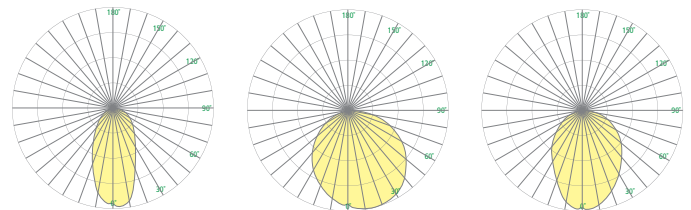

Ambient

Exam

Ambient and Exam



# CM2062-T LENGA (cont.)

## 3" Dual Overbed Units – Behavioral Health – Tunable



**SOLD ONLY AS A DUAL OVERBED SET (SET INCLUDES TWO UNITS IN TANDEM)**

Fill in shaded boxes using information listed below

CM2062-T	TUN2	–		
MODEL	SOURCE TUN2		VOLTAGE <sup>1</sup> 120V 277V	LENS FRAME FINISH
				OPTION <sup>2</sup> RB

See last page for finish order codes

### SOURCE

Dimmable 0-10V to 10%, Minimum 90CRI, 3-step MacAdam (2700K-6500K)

Source	CCT	Delivered Lumens*		Power (Watts)
TUN2	2700K-6500K	Ambient	2300	28
		Exam	6300	87
		Combined	8500	114

\*At 3500K, delivered lumens can vary slightly as CCT changes

Note: Fixture provided with separate ambient and exam circuits

### VOLTAGE<sup>1</sup> (Select one)

120V	120V, 50/60 Hz
277V	277V, 50/60 Hz

### OPTION<sup>2</sup>

RB	Pre-ship recessed backbox
----	---------------------------

### TM-30 DATA

For TM-30 data please contact us at [info@visalighting.com](mailto:info@visalighting.com)

# CM2062-T LENGA (cont.)

## 3" Dual Overbed Units – Behavioral Health – Tunable



### LENGA PRODUCT FAMILY

- CM2060-W – 3" Dual Overbed Units
- CM2060-T – 3" Dual Overbed Units – Tunable
- CM2062-W – 3" Dual Overbed Units – Behavioral Health
- CM2062-T – 3" Dual Overbed Units – Tunable Behavioral Health

See [VisaLighting.com/products/Lenga](https://visalighting.com/products/Lenga) for more information

### SUGGESTED VARIATIONS

- Custom colors

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

