

## CP1325 COSMO™


[Visalighting.com/products/Cosmo](http://Visalighting.com/products/Cosmo)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_


DIMENSIONS<sup>5</sup>

**▲ OAH must be specified**

OAH is the maximum distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(36) indicates an overall fixture height of 36"

W = Width    OAH = Overall Height    X = Body Height


W	34"	(864 mm)
X	3-5/8"	(92 mm)
OAH	36"	(914 mm)

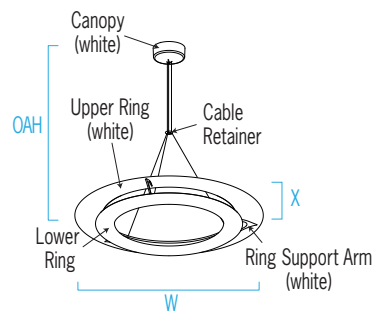


## FEATURES

- High or low lumen output
- Integral driver in canopy
- Modular design allowing replacement of the LED source and driver
- Optional 90+ CRI
- Mounts to standard electrical junction box (by others) for flat ceiling
- No VOC powder coat paint finish; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications
- Suspended by three slim black, white, or grey braided cloth-covered single conductor power cords

## RELATIVE SCALE DRAWING

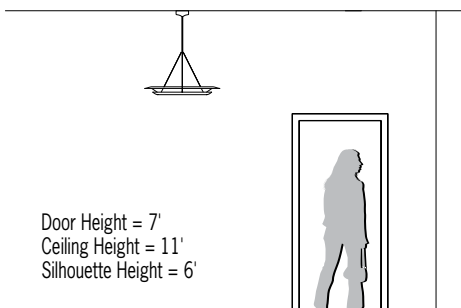

## PHOTOMETRICS

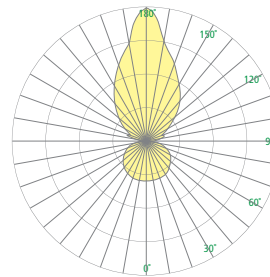

## CP1325 COSMO (cont.)

Fill in shaded boxes using information listed below

CP1325	-	MVOLT					
MODEL	SOURCE <sup>1</sup> L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	SOURCE OPTION <sup>2</sup> 90CRI	VOLTAGE MVOLT	LOWER RING FINISH  See last page for finish order codes	OPTION(S) <sup>3</sup> DCC REM	CORD COLOR <sup>4</sup> WSC (white) GSC (grey) BSC (black)	OAH <sup>5</sup>  See page 1

SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1% and Minimum 83CRI, within 3-step MacAdam

SOURCE	CCT	Delivered Lumens	Power (Watts)
L30K(H)	3000K	4400	52
L30K(L)	3000K	2900	32
L35K(H)	3500K	4400	52
L35K(L)	3500K	2900	32
L40K(H)	4000K	4600	52
L40K(L)	4000K	3000	32

## VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

SOURCE OPTION<sup>2</sup>

90CRI	Color rendering index 93; minimum R9 value of 50 (delivered lumens reduced by 15%)
-------	--

OPTIONS<sup>3</sup> (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
REM	Remote emergency driver

POWER CORD COLOR<sup>4</sup> (Select one)

BSC	Black power cord
GSC	Gray power cord
WSC	White power cord



## CP1325 COSMO (cont.)

## SUGGESTED VARIATIONS

- Custom colors

See [Visalighting.com/products/Cosmo](https://visalighting.com/products/Cosmo) for more information

## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

## Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

## Alternative Metal Finishes (Premium)

			
<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
			
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative