

BROADWAY™

CP2000-CBL_CP2002-CBL_CP2004-CBL

Aircraft Cable Suspension


Visalighting.com/products/Broadway

Type: _____ Project: _____ Location: _____

**DIMENSIONS** ^{1,5}

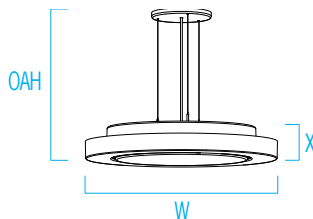
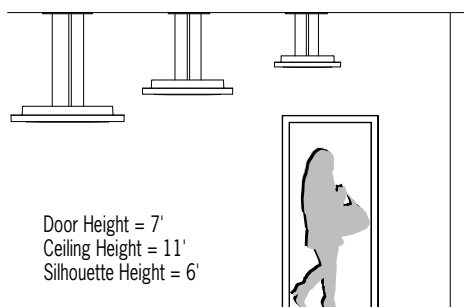
OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
Example - OAH(24) indicates an overall fixture height of 24"

▲ OAH must be specified

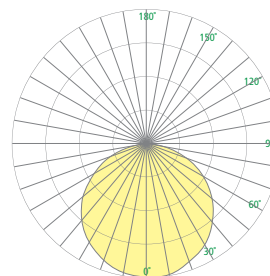
W = Width OAH = Standard Overall Height X = Body Height Y = Rim Height

	CP2000-CBL	CP2002-CBL	CP2004-CBL
W	29" (737 mm)	39-1/2" (1003 mm)	49-1/2" (1257 mm)
OAH	24" (610 mm)	36" (914 mm)	48" (1219 mm)
X	5" (127 mm)	6-1/2" (165 mm)	7" (178 mm)
Y	2-5/8" (67 mm)		

Structural blocking required
for CP2002-CBL and CP2004-CBL

**RELATIVE SCALE DRAWING****FEATURES**

- Integral driver
- Modular design for replacement of LED source and driver
- Mounts to standard 4" octagonal junction box (**CP2000-CBL**)
- Mounts through 4" octagonal by 2-1/8" deep electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45° from horizontal (**CP2002-CBL & CP2004-CBL**)
- Heavy gauge spun metal housing with upper lensed aperture to provide a luminous glow to reduce ceiling contrast
- Thermally formed 1/8" thick white acrylic diffuser with matte finish
 - UV stable
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat for metal finishes
- ETL listed for damp locations. Not suitable for exterior applications

PHOTOMETRICS

BROADWAY (cont.)

CP2000-CBL_CP2002-CBL_CP2004-CBL

Aircraft Cable Suspension



Fill in shaded boxes using information listed below

- MVOLT						
MODEL ¹	SOURCE ²	VOLTAGE MVOLT	FINISH	DIFFUSER OPTION ³	OPTION(S) ⁴	OA ⁵
CP2000-CBL CP2002-CBL CP2004-CBL See page 1	<ul style="list-style-type: none"> • L30K(H) • L30K(L) • L35K(H) • L35K(L) • L40K(H) • L40K(L) 		See last page for finish order codes	IRP	BSC DCC UPLT XPS	See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	CP2000-CBL		CP2002-CBL		CP2004-CBL	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	7600	82	11300	106	14300	132
• L30K(L)	3000K	5200	54	7700	70	9800	86
• L35K(H)	3500K	7800	82	11600	106	14700	132
• L35K(L)	3500K	5400	54	8000	70	10100	86
• L40K(H)	4000K	8000	82	11900	106	15000	132
• L40K(L)	4000K	5500	54	8100	70	10300	86

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

DIFFUSER OPTION³

Diffuser is High Performance Matte White Acrylic unless IRP diffuser option is selected

IRP	Impact resistant polycarbonate white diffuser
-----	---

OPTIONS⁴ (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

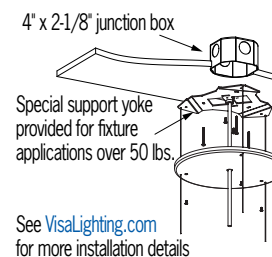
BSC	Black power cord (standard cord is white)
DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
UPLT	Lensed aperture in housing produces % uplight: 4.6% (CP2000-CBL), 3.2% (CP2002-CBL), 2.7% (CP2004-CBL)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

CORD & CABLE DETAIL



STRUCTURAL BLOCKING DETAIL

Required for CP2002-CBL and CP2004-CBL



BROADWAY (cont.)

CP2000-CBL_CP2002-CBL_CP2004-CBL; Aircraft Cable Suspension



BROADWAY PRODUCT FAMILY

- CM2000 – 29" Ceiling Surface
- CP2000-CBL – 29" Aircraft Cable
- CP2000-STM – 29" Single Stem
- CP2002-CBL – 40" Aircraft Cable
- CP2002-STM – 40" Single Stem
- CP2004-CBL – 50" Aircraft Cable
- CP2004-STM – 50" Single Stem

See [Visalighting.com/products/Broadway](https://visalighting.com/products/Broadway) for more information

SUGGESTED VARIATIONS

- Custom color or material
- Sloped ceiling adaptor for ceiling slopes greater than 45 degrees
- Weather tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum

