

# CP3975 OMNIENCE™

## 34" Diameter - Aircraft Cable


[Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




### DIMENSIONS<sup>4</sup>

**▲ OAH must be specified**


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.  
Example - OAH(36) indicates an overall fixture height of 36". MP is the distance (in inches) from the bottom of the fixture to the bottom of the Stem Accent Junction.

W = Width X = Body Height OAH = Standard Overall Height MP = Midpoint

W	34"	(864 mm)
OAH	36"	(914 mm)
X	6-3/4"	(171 mm)
MP	32-1/2"	(521 mm)

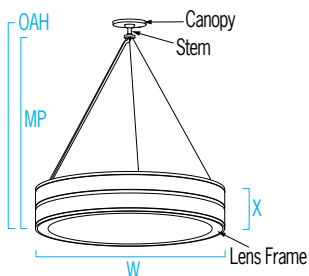


### RELATIVE SCALE DRAWING

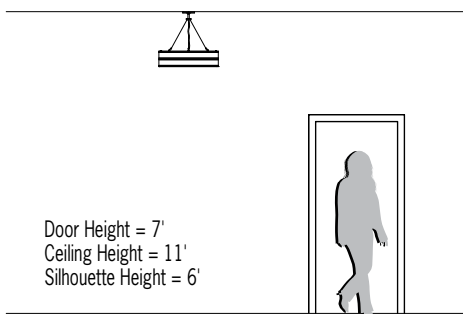

### FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Upper perforations provide a luminous glow to reduce ceiling contrast if UPLT option is selected
- Mounts through 4" octagonal 2-1/8" deep electrical junction box (by others) with provided hardware for ceiling slopes up to 45° from horizontal
- Rolled extruded aluminum housing
- 1/8" thick diffuser with matte finish
  - UV stable
- Optional 1/8" thick impact resistant polycarbonate clear lens cover
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

### PHOTOMETRICS

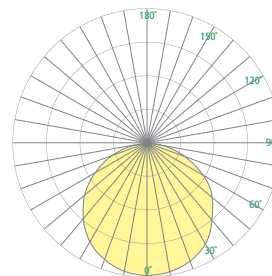

Compliant



XPS



ETL Listed



5 Year Warranty

# CP3975 OMNIENCE (cont.)

## 34" Diameter - Aircraft Cable



Fill in shaded boxes using information listed below

CP3975		-	MVOLT				
MODEL	SOURCE <sup>1</sup> • L30K • L35K • L40K		VOLTAGE MVOLT	FINISH  See last page for finish order codes	DIFFUSER <sup>2</sup> IRP	OPTION(S) <sup>3</sup> UPLT XPS	OAH <sup>4</sup>  See page 1

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 83CRI within 3-step MacAdam

Sources	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	11600	120
L35K	3500K	11600	120
• L40K	4000K	12000	120

### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

### DIFFUSER OPTIONS<sup>2</sup>

Diffuser is matte white acrylic

IRP	Impact resistant polycarbonate lens
-----	-------------------------------------

### OPTIONS<sup>3</sup> (Multiple selections allowed)

⚠ Option availability may be interdependent with Other Options

UPLT	Lensed aperture in housing produces 3.8% uplight
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS

# CP3975 OMNIENCE (cont.)

## 34" Diameter - Aircraft Cable



### OMNIENCE PRODUCT FAMILY

Aircraft Cable	26" Diameter	• <a href="#">CP3970</a>
	34" Diameter	• <a href="#">CP3975</a>
	48" Diameter	• <a href="#">CP3995</a>
Stem	26" Diameter	• <a href="#">CP3980</a>
	34" Diameter	• <a href="#">CP3985</a>
	48" Diameter	• <a href="#">CP3990</a>
Ceiling Mount	26" Diameter	• <a href="#">CM1830</a>

### SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Omnience](https://visalighting.com/products/Omnience) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

