


CP4408 HELLEN

16" Direct Pendant



VisaLighting.com/products/Hellen


Type: _____ Project: _____ Location: _____

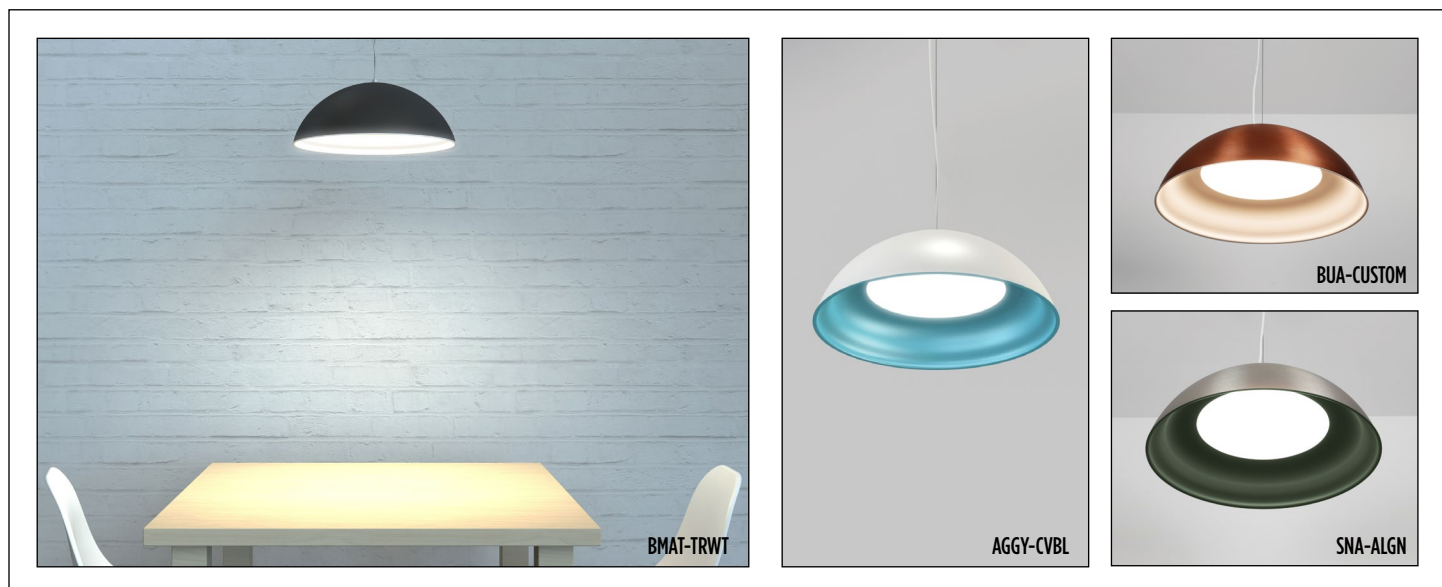

DIMENSIONS⁴

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA 16" (406 mm)
X 6-1/4" (159 mm)
OAH 120" (3048 mm)
WT 5 lbs (2268 gm)

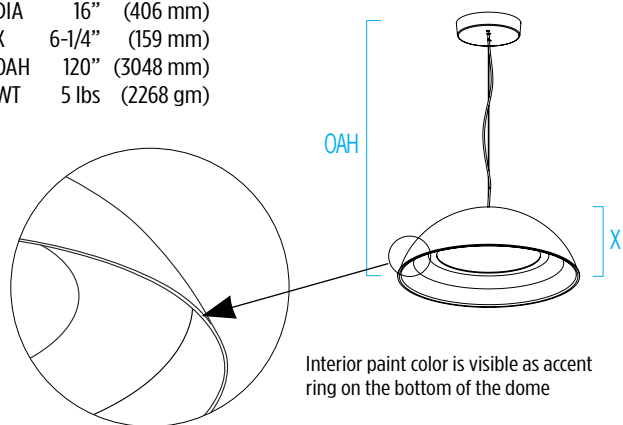


FEATURES

- Flat white acrylic lens and contoured bottom reflector
- High or low lumen output options
- Integral driver in canopy
- Optional 90+ CRI (2700K sources are 90+ CRI standard)
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagonal j-box
- Hand spun aluminum dome and bottom reflector
- Non-VOC powder-coat or environmentally friendly low VOC metal alternative finishes available on outer dome
- Non-VOC powder-coat finishes available on bottom reflector
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

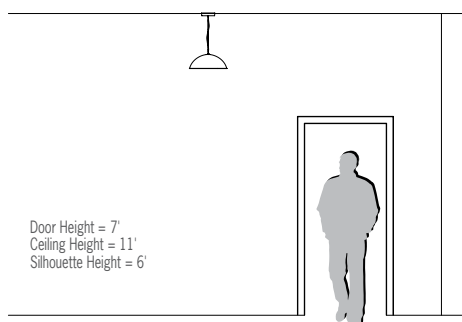

PHOTOMETRICS

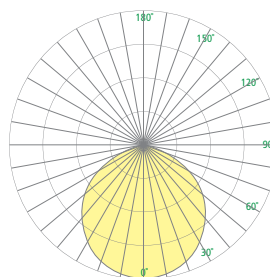

Compliant



ETL Listed



5 Year Warranty

CP4408 HELLEN (cont.)

16" Direct Pendant



Fill in shaded boxes using information listed below

CP4408			MVOLT				
MODEL	SOURCE ¹	SOURCE OPTION ²	VOLTAGE MVOLT	OUTER FINISH	REFLECTOR FINISH	OPTION ³ DCC	OAH ⁴
	L27K(H) L27K(L) L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI Minimum 80CRI is standard if option is not selected Minimum 90CRI is standard with 2700K Sources		See last page for finish order codes Canopy is painted white Alternative and premium finishes are for outer dome only	See last page for finish order codes		See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	2500	27
L27K(L)*	2700K	1700	17
L30K(H)	3000K	2600	27
L30K(L)	3000K	1800	17
L35K(H)	3500K	2700	27
L35K(L)	3500K	1850	17
L40K(H)	4000K	2800	27
L40K(L)	4000K	1900	17

*L27K sources are 90CRI standard

**Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	50,000 hrs
----------------	------------

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources (L27K sources: 90CRI is standard)
-------	--


OPTION³

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

CP4408 HELLEN (cont.)

16" Direct Pendant

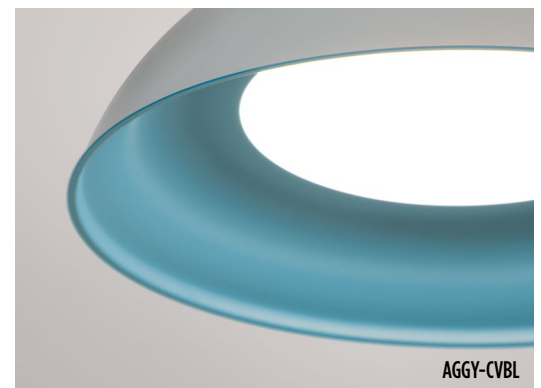

SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors
- Larger size

HELLEN PRODUCT FAMILY

- CP4408 – 16"
- CP4410 – 24"
- CP4412 – 32"

See [Visalighting.com/products/Hellen](https://visalighting.com/products/Hellen) for more information

CP4408 HELLEN (cont.)

16" Direct Pendant



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)


						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

Alternative finishes and premium metal finishes are for outer dome only

Metal Finish (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative


BA Brushed Aluminum