

CP4422 RIFF™

24" Direct Drum Pendant


VisaLighting.com/products/Riff


Type: _____ Project: _____ Location: _____




DIMENSIONS³

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight

DIA 24" (610 mm)
X 9-3/4" (248 mm)
OAH 120" (3048 mm)
WT 14 lb (6350 g)

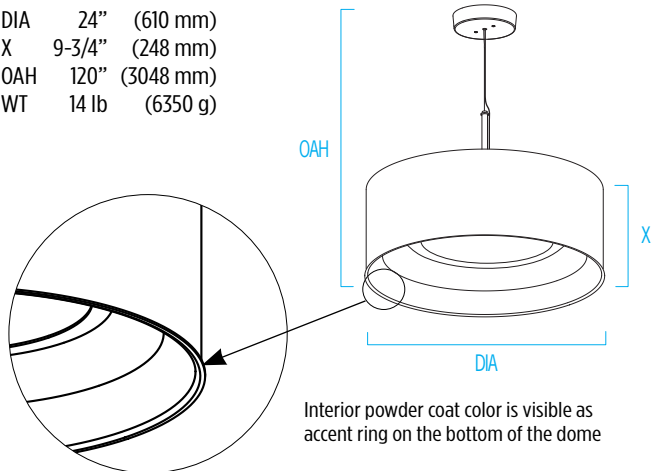


RELATIVE SCALE DRAWING

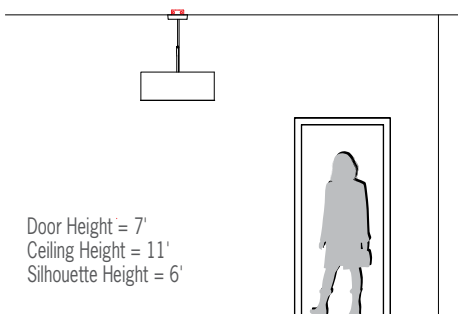

FEATURES

- Flat white acrylic lens and contoured bottom reflector
- High or low lumen output options
- Integral driver in canopy
- Optional 90+ CRI (2700K sources are 90+ CRI standard)
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagonal j-box
- Rolled aluminum drum, hand spun aluminum bottom reflector
- Non-VOC powder-coat or environmentally friendly low VOC metal alternative finishes available on outer drum
- Non-VOC powder-coat finishes available on bottom reflector
- ETL listed for damp locations. Not suitable for exterior applications

PHOTOMETRICS



CP4422 RIFF (cont.)

24" Direct Drum Pendant



Fill in shaded boxes using information listed below

CP4422		-		-		MVOLT	
MODEL	SOURCE ¹	SOURCE OPTION ²		VOLTAGE MVOLT	OUTER FINISH	REFLECTOR FINISH	OAH ³
	L27K(H) L27K(M) L27K(L) L30K(H) L30K(M) L30K(L) L35K(H) L35K(M) L35K(L) L40K(H) L40K(M) L40K(L)	90CRI Minimum 80CRI is standard if option is not selected. Minimum 90CRI is standard with 2700K Sources			See last page for finish order codes	See last page for finish order codes	See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	5500	58
L27K(M)*	2700K	3800	40
L27K(L)*	2700K	2200	22
L30K(H)	3000K	6000	58
L30K(M)	3000K	4100	40
L30K(L)	3000K	2400	22
L35K(H)	3500K	6200	58
L35K(M)	3500K	4200	40
L35K(L)	3500K	2500	22
L40K(H)	4000K	6300	58
L40K(M)	4000K	4300	40
L40K(L)	4000K	2500	22

*L27K sources are 90CRI standard

**Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	50,000 hrs
----------------	------------

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources
-------	--

CP4422 RIFF (cont.)

24" Direct Drum Pendant



RIFF PRODUCT FAMILY

- CP4420 – 16"
- CP4422 – 24"
- CP4424 – 32"

See [Visalighting.com/products/Riff](https://visalighting.com/products/Riff) for more information

SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum

