


# CP6000 Sequence™ Mini

## Vertical Suspension


[VisaLighting.com/products/Sequence-Mini](https://VisaLighting.com/products/Sequence-Mini)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

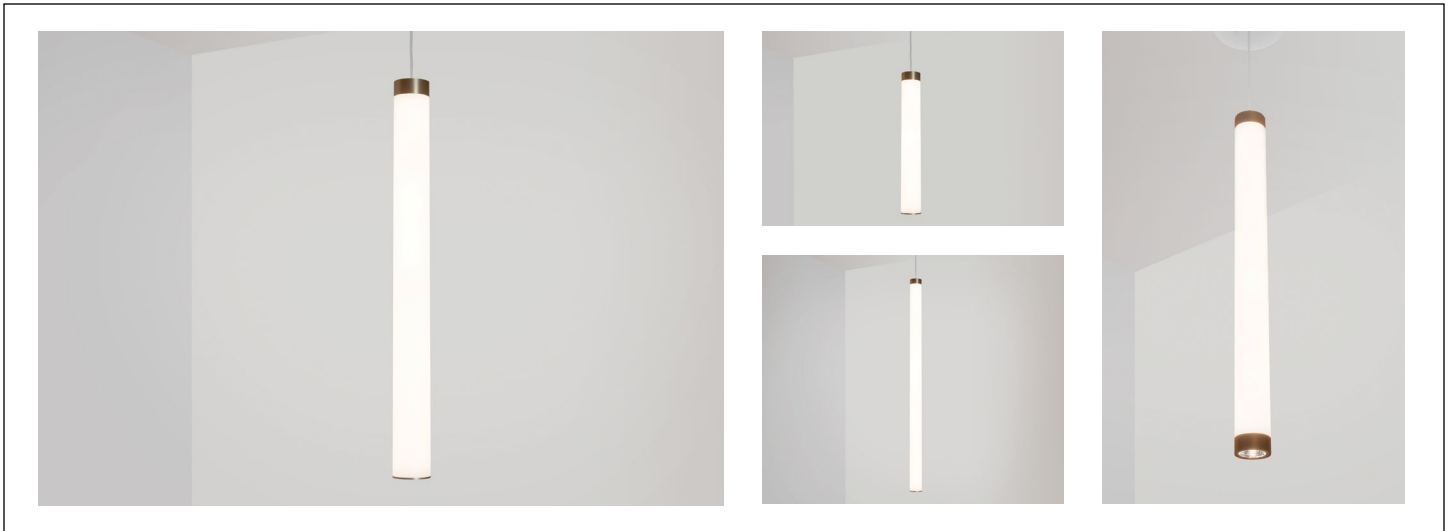

### DIMENSIONS<sup>10</sup>



### OAH MUST BE SPECIFIED

DIA = Diameter OAH = Overall Height X = Body Length WT = Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"

DIA	2-1/4"	(57 mm)
OAH	96"	(2438 mm)
MIN OAH	X + 3"	(X + 76 mm)
X	12" – 72"	(305 mm – 1829 mm)
WT	1 lb – 6 lbs	(454 g – 2722 g)


### RELATIVE SCALE DRAWING

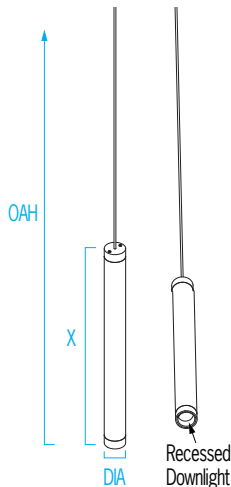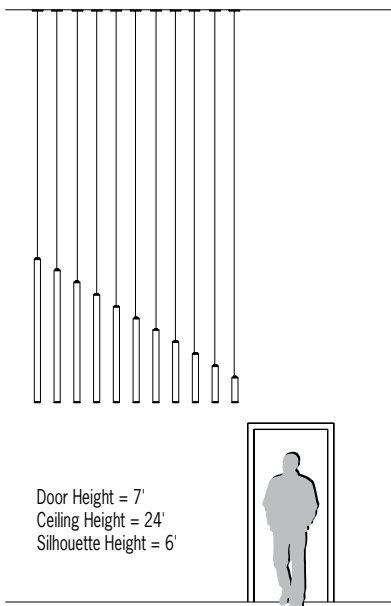


### FEATURES

- Varying lengths, from 12" to 72", in 6" increments
- Optional downlight, 0-10V dimmable (controls by others), with narrow, medium, or wide optical distribution
- Endcaps machined from raw 2.25" DIA Aluminum billet
- Remote Driver Enclosure (RMD) is available for all lengths. Round canopy is 5-1/4" diameter and 1/2" deep.
- Driver in canopy (SDC) is available for lengths 24" and longer. Round canopy is 6-3/8" diameter and 1-1/2" deep.
- Canopy for both (RMD) or (SDC) mounts over 4x4 junction box (by others) with provided hardware and is painted white
- Suspended via black, white, or gray power cord. Overall height (OAH) can be field adjusted to a shorter length during installation
- Matte white acrylic body
- No VOC powder coat finish or low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications


### PHOTOMETRICS




Bodylight



Downlight Optic NRW 27° Beam



Downlight Optic MED 33° Beam



Downlight Optic WIDE 48° Beam



ETL Listed



5 Year Warranty



Compliant

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



Fill in shaded boxes using information listed below

### CP6000

MODEL	LENGTH <sup>1</sup>	BODYLIGHT <sup>2</sup>	OPTIONAL DOWNLIGHT <sup>3</sup>	OPTIONAL DOWNLIGHT OPTIC <sup>4</sup>	VOLTAGE <sup>5</sup>	OPTIONAL DIMMING CONTROL <sup>6</sup>	FINISH	CORD COLOR <sup>7</sup>	DRIVER <sup>8</sup>	OPTION <sup>9</sup>	OAH <sup>10</sup>
	12 48 18 54 24 60 30 66 36 72 42	L30K L35K L40K	LOW HIGH	MED NRW WIDE	MVOLT 347V	DALI	See last page for finish order codes	BSC WSC GSC	SDC RMD	DCC	See page 1
	Custom lengths available from 12" to 72" in length in 1" nominal increments; contact factory			Required for downlight option		Dimmable 0-10V to 1% if option not selected. <b>DALI not available with SDC or 347V</b>			SDC not available with 347V or DALI option; SDC not available on 12" and 18" lengths		

### BODYLIGHT SOURCE (Select one length<sup>1</sup> and one source<sup>2</sup>)

Minimum 80CRI, within 3-step MacAdam

Bodylight Source <sup>2</sup>	L30K	L35K	L40K	Power (Watts) (Body)
CCT	3000K	3500K	4000K	
Length <sup>1</sup>	Delivered Lumens (Body)			
12"	650	700	700	7
18"	1000	1100	1100	10
24"	1400	1500	1600	14
30"	1800	1900	2000	17
36"	2200	2300	2500	21
42"	2600	2800	2900	24
48"	3000	3200	3300	28
54"	3400	3600	3800	31
60"	3800	4000	4200	35
66"	4200	4500	4700	39
72"	4600	4900	5100	42

Bodylight and downlight are separately switched and controlled/dimmed

### LUMEN MAINTENANCE RATING

Bodylight	L80 (reported)	>72,000 hrs
Downlight	L80 (reported)	>55,000 hrs


### OPTIONAL DOWNLIGHT<sup>3</sup> AND OPTIC<sup>4</sup>

Fixture bottom is solid if no downlight is specified. Downlight adds an extra 1" to overall length. CCT matches bodylight selection Minimum 80CRI, within 3-step MacAdam

	Delivered Lumens		Power (Watts)
	L30K/L35K	L40K	
LOW	800	850	8
HIGH	1500	1600	17

Downlight Optic	
NRW	27° Beam
MED	33° Beam
WIDE	48° Beam

### DIMENSIONS WITH DOWNLIGHT CP6000 – 24" EXAMPLE



Downlight adds an extra 1" to overall height (OAH)

### VOLTAGE<sup>5</sup> (Select one)

MVOLT	120-277V, 50/60 Hz
347V	50/60 Hz Not available with DALI or SDC options

Options continued on Page 3

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



### DIMMING CONTROL OPTION<sup>6</sup>

0-10V dimming to 1% is included unless DALI option is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

<b>DALI</b>	Dimming control capability (to 5%) via DALI 1.0 protocol (not available with 347V or SDC option)
-------------	--

### CORD COLOR<sup>7</sup> (Select one)

<b>BSC</b>	Black power cord
<b>WSC</b>	White power cord
<b>GSC</b>	Gray power cord


### DRIVER<sup>8</sup> (Select one)

▲ Availability may be interdependent with Voltage, Source or Other Options


<b>SDC</b>	Surface canopy with integral driver; canopy is painted white (not available with 347V or DALI option; not available on 12" and 18" lengths)
<b>RMD</b>	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC); canopy is painted white

### REMOTE DRIVER (RMD) INFORMATION

8" RMD box is used for 24" to 72" lengths

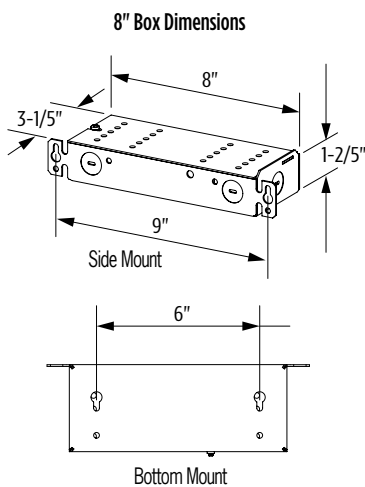


18" RMD box is used for any of these lengths: 12" & 18" lengths, DALI dimming, 347V

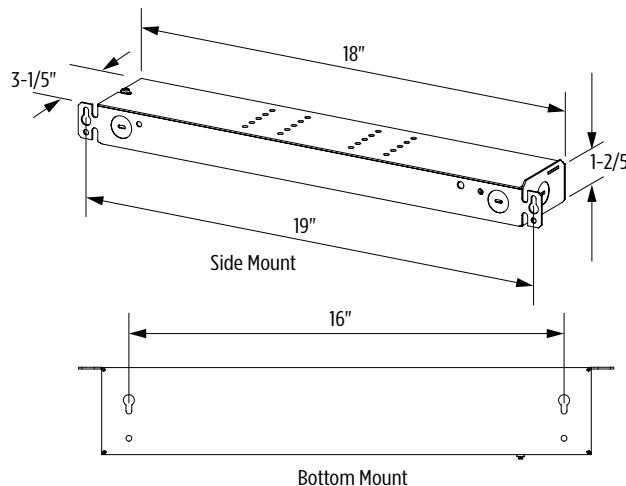

Remote driver boxes have knockouts for conduit connections

### DRIVER DETAIL

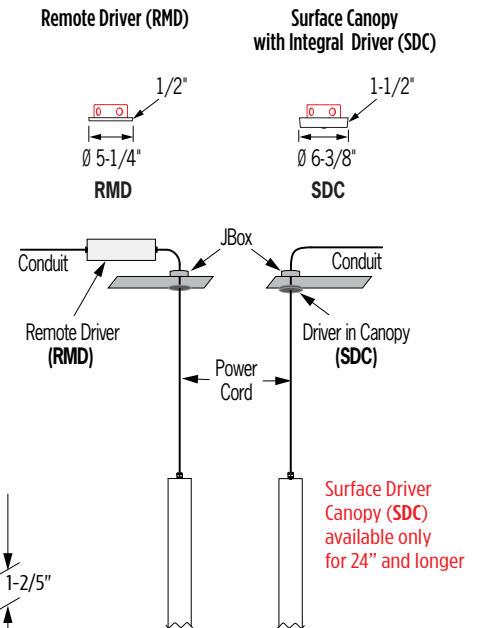

# CP6000 Sequence Mini (cont.)

## Vertical Suspension



### OPTION<sup>9</sup>

▲ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft

### SEQUENCE PRODUCT FAMILY

Wall Units	<ul style="list-style-type: none"> <li>• CB5201 — 34 In Indoor Wall</li> <li>• CB5203 — 45 In Indoor Wall</li> </ul>		<ul style="list-style-type: none"> <li>• OP2252 — 8 In x 2 Ft Canopy</li> <li>• OP2253 — 8 In x 3 Ft Canopy</li> </ul>
4" Diameter Pendants	<ul style="list-style-type: none"> <li>• CP2020 — 4 In x 2 Ft</li> <li>• CP2022 — 4 In x 3 Ft</li> <li>• CP2024 — 4 In x 4 Ft</li> <li>• CP2026 — 4 In x 5 Ft</li> <li>• CP2028 — 4 In x 6 Ft</li> <li>• CP2030 — 4 In x 8 Ft</li> </ul>	Outdoor 8" Diameter Pendants	<ul style="list-style-type: none"> <li>• OP2254 — 8 In x 4 Ft Canopy</li> <li>• OP2262 — 8 In x 2 Ft Catenary</li> <li>• OP2263 — 8 In x 3 Ft Catenary</li> <li>• OP2264 — 8 In x 4 Ft Catenary</li> </ul>
		Outdoor Wall Units	<ul style="list-style-type: none"> <li>• OW5201 — 34 In Outdoor Wall</li> <li>• OW5203 — 45 In Outdoor Wall</li> </ul>
8" Diameter Pendants	<ul style="list-style-type: none"> <li>• CP2036 — 8 In x 2 Ft</li> <li>• CP2038 — 8 In x 3 Ft</li> <li>• CP2040 — 8 In x 4 Ft</li> <li>• CP2042 — 8 In x 5 Ft</li> <li>• CP2044 — 8 In x 6 Ft</li> <li>• CP2046 — 8 In x 8 Ft</li> </ul>	4" Indoor Sequence Square	<ul style="list-style-type: none"> <li>• CP5820 — 4 in x 2 ft</li> <li>• CP5822 — 4 in x 3 ft</li> <li>• CP5824 — 4 in x 4 ft</li> <li>• CP5826 — 4 in x 5 ft</li> <li>• CP5828 — 4 in x 6 ft</li> <li>• CP5830 — 4 in x 8 ft</li> </ul>
12" Diameter Pendants	<ul style="list-style-type: none"> <li>• CP2052 — 12 In x 2 Ft</li> <li>• CP2054 — 12 In x 3 Ft</li> <li>• CP2056 — 12 In x 4 Ft</li> <li>• CP2058 — 12 In x 5 Ft</li> <li>• CP2060 — 12 In x 6 Ft</li> <li>• CP2062 — 12 In x 8 Ft</li> </ul>	8" Indoor Sequence Square	<ul style="list-style-type: none"> <li>• CP5836 — 8 in x 2 ft</li> <li>• CP5838 — 8 in x 3 ft</li> <li>• CP5840 — 8 in x 4 ft</li> <li>• CP5842 — 8 in x 5 ft</li> <li>• CP5844 — 8 in x 6 ft</li> <li>• CP5846 — 8 in x 8 ft</li> </ul>
Outdoor 4" Diameter Pendants	<ul style="list-style-type: none"> <li>• OP2222 — 4 In x 3 Ft Canopy</li> <li>• OP2223 — 4 In x 4 Ft Canopy</li> <li>• OP2224 — 4 In x 5 Ft Canopy</li> <li>• OP2232 — 4 In x 3 Ft Catenary</li> <li>• OP2233 — 4 In x 4 Ft Catenary</li> <li>• OP2234 — 4 In x 5 Ft Catenary</li> </ul>	Vertical Sequence Mini	<ul style="list-style-type: none"> <li>• CP6000 — 2 in; various lengths</li> </ul>
		Horizontal Sequence Mini	<ul style="list-style-type: none"> <li>• CP6002 — 2 in; various lengths</li> </ul>

### SUGGESTED VARIATIONS

- Custom lengths/lumen outputs
- Alternative downlight bezel and end cap color
- Multi-fixture clusters via custom multi-point canopies
- Angled mounting via additional hang cable

See [Visalighting.com/Sequence](https://visalighting.com/Sequence), [Visalighting.com/Sequence-Square](https://visalighting.com/Sequence-Square) and [Visalighting.com/Sequence-Mini](https://visalighting.com/Sequence-Mini) for more information

# CP6000 Sequence Mini (cont.)



## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)


### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
						
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
						
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

### Alternative Metal Finishes (Premium)

			
<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
			
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

### Metal Finish (Premium)


<b>BA</b> Brushed Aluminum

