CP6110 CELEST TR™

Small 18" H - Aluminum Panels



VisaLighting.com/products/Celest-tr


Type: Project: Location:




DIMENSIONS⁵ OAH MUST BE SPECIFIED


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.

X = Body Height OAH = Overall Height WT = Weight

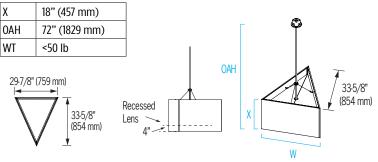

RELATIVE SCALE DRAWING







FEATURES

- Integral drivers
- Up & down light available in Direct-Indirect (DIRIND) or Semi-Indirect (SEMIND) distribution
- Uplight and downlight separately switched and dimmed (may be wired together during installation)
- Swivel ball & stem mount directly to structural blocking; wire connections can be made through a 4" octagonal 2-1/8" deep electrical junction box (by others)
- Inner luminous assembly suspended directly by stem; may be suspended and wired separately with outer shade panels installed later
- Outer shade panel assembly suspended via aircraft cables to stem collar with fittings concealed behind panels for height and levelling adjustment
- Frosted acrylic top and bottom lenses
- Shade panels are shipped disassembled for flat packing
- Lightweight, recyclable aluminum outer shade panels
- Non-VOC powder coat finishes or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS



Semi-Indirect (SEMIND)



Direct-Indirect (DIRIND)










800-788-VISA VisaLighting.com Page 1

CP6110 CELEST TR (cont.)

Small 18" H - Aluminum Panels



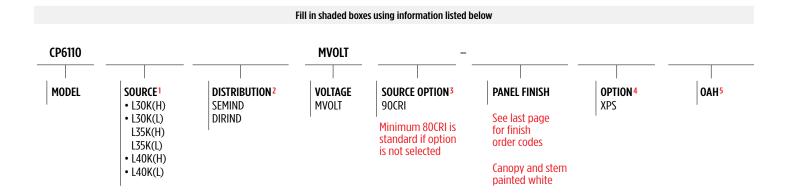

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	Distribution	Delivered Lumens	Power (Watts)
- 170V(II)	SEMIND	5,500	51
• L30K(H)	DIRIND	6,500	59
- 170V(I)	SEMIND	2,500	23
• L30K(L)	DIRIND	3,000	27
L35K(H)	SEMIND	5,500	51
LOOK(II)	DIRIND	6,500	59
1751/(1)	SEMIND	2,500	23
L35K(L)	DIRIND	3,000	27
• L40K(H)	SEMIND	5,500	51
• L4UK(II)	DIRIND	6,500	59
• L40K(L)	SEMIND	2,500	23
- L4UK(L)	DIRIND	3,000	27

^{*}Note: multiply by 0.85 for 90CRI delivered lumens

OPTION4

XPS	Express 10 day shipping. Items marked with a bullet
VL 2	(•) are not available with XPS

DISTRIBUTION² (Select one)

SEMIND	Semi-indirect: 65% uplight, 35% downlight (approximate)
DIRIND	Direct-indirect: 50% uplight, 50% downlight (approximate)

VOLTAGE (Select one)

MVOLT fixture accepts 120 through 277 input voltage

MVOLT	120-277V, 50/60 Hz
-------	--------------------

SOURCE OPTION3

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value
	of 50 (lumen output reduced by 15%)

LUMEN MAINTENANCE RATING

L30 (Teporteu)	~55,000
L90 (reported)	>55.000

Reported Lifetime per IES TM-21

CP6110 CELEST TR (cont.)

Small 18" H - Aluminum Panels



CELEST PRODUCT FAMILY

	Description	Model
	Celest SQ - Large	• CP6100
Metal	Celest HX - Large	• CP6102
	Celest TR - Large	• CP6104
Panels	Celest SQ - Small	• CP6106
	Celest HX - Small	• CP6108
	Celest TR - Small	• CP6110
	Celest SQ - Large	• CP6120
	Celest HX - Large	• CP6122
Acoustic	Celest TR - Large	• CP6124
Panels	Celest SQ - Small	• CP6126
	Celest HX - Small	• CP6128
	Celest TR - Small	• CP6130

See <u>Visalighting.com/products/Celest</u> for more information

SUGGESTED VARIATIONS

- · Alternate control options
- No top lens
- Custom colors & finishes
- Mix & match panel colors (metal & acoustic)
- Luminous & non-luminous cutouts with mascots, logos, phrases, etc.





CP6110 CELEST TR (cont.)

Small 18" H - Aluminum Panels



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



Alternative Metal Finishes (Premium)



Metal Finish (Premium)



Aluminum