

OP2122 ZUME™ OUT

12" Catenary Suspension


VisaLighting.com/products/Zume-out

Type: _____ Project: _____ Location: _____



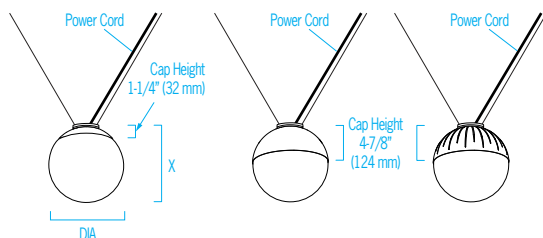
DIMENSIONS⁵

PCL MUST BE SPECIFIED

DIA = Diameter X = Body Height PCL = Power Cord Length WT=Weight

PCL is the distance (in inches) from the fixture to the end of the cord jacket or to the end of installed quick connect (for options including a quick connect)
Example: PCL (60) indicates a power cord length of 60".


DIA 12" (305 mm)
X 12-1/4" (311 mm) Add 1-3/4" to X value with MSC option
PCL 60" (1524 mm)
EPA 2.4ft²
WT 8 lbs



FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- High and low lumen output
- Integral driver
- IP65 rated
- **Stainless steel structural cables are not include. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Cable connections to the fixture accept 1/8" to 1/4" diameter cables
- Fixtures may not be directly mounted to catenary cables over 1/4" diameter. Suspended mount must be used (see relative scale drawing)
- Crossing secondary cable is perpendicular to the primary cable and is limited to 1/8" when the primary cable is 1/4"
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish
- ETL listed for wet locations

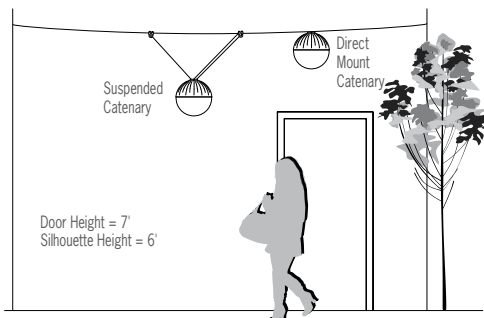RELATIVE SCALE DRAWING



PHOTOMETRICS



IP65



ETL Listed



5 Year Warranty



Buy American
Compliant

OP2122 ZUME OUT (cont.)

12" Catenary Suspension

Fill in shaded boxes using information listed below

OP2122

- MVOLT

MODEL

CAP¹ShortCAP
SolidCAP
SlottedCAPSOURCE²L30K(H)
L30K(L)
L35K(H)
L35K(L)
L40K(H)
L40K(L)VOLTAGE
MVOLT

CAP FINISH

See last page
for finish
order codesCATENARY³1QC
2QC
MSC
SPCDIFFUSER⁴AC
FRSTPCL (POWER
CORD LENGTH)⁵

See page 1

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	1700	1900	1200	1400	1300	1500	17
L30K(L)	3000K	1100	1200	800	900	800	900	10
L35K(H)	3500K	1800	1900	1200	1500	1300	1500	17
L35K(L)	3500K	1100	1200	800	900	800	900	10
L40K(H)	4000K	1800	2000	1300	1500	1300	1500	17
L40K(L)	4000K	1100	1200	800	900	800	1000	10


VOLTAGE

MVOLT 120-277V, 50/60 Hz

CATENARY POWER CONNECTION³ (Select One)

See page 3 for more information

1QC	One quick connect (factory installed)
2QC	Two quick connects (factory installed)
MSC	Mid-run horizontal splice connection (mounted at top of unit)
SPC	Single power cord

DIFFUSER⁴ (Select One)AC White acrylic globe
FRST Frosted translucent globe

White



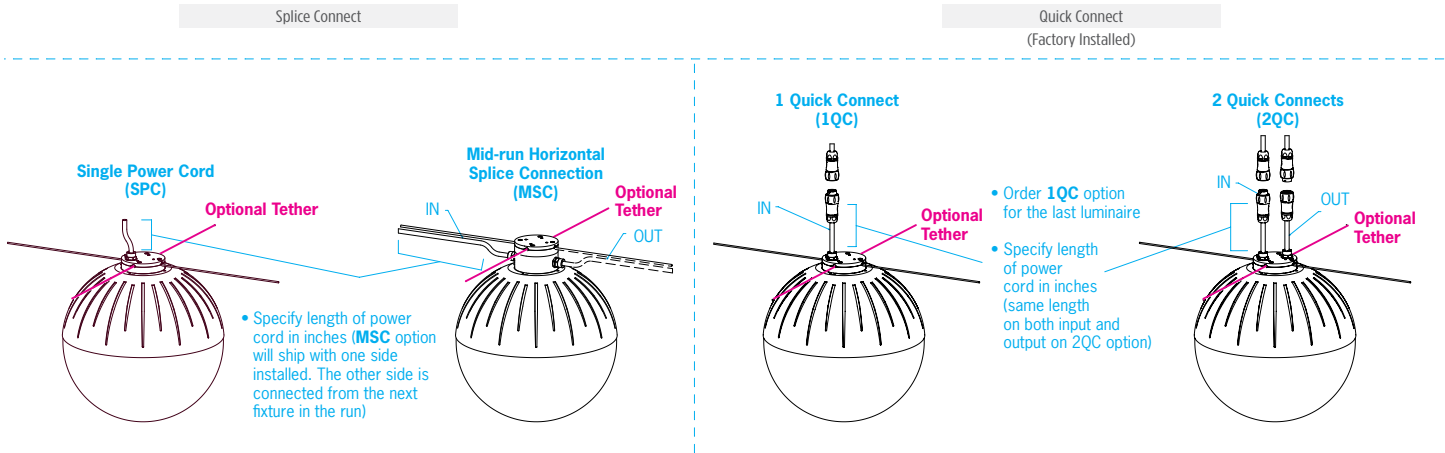
Frosted Translucent

OP2122 ZUME OUT (cont.)

12" Catenary Suspension

CATENARY POWER ILLUSTRATIONS

See page 4 for additional accessories



ZUME PRODUCT FAMILY

Zume Out – Outdoor	Cord and Cable Suspension	• OP2120-ShortCap – 12" • OP2130-ShortCap – 16" • OP2140-ShortCap – 20"	• OP2120-SolidCap – 12" • OP2130-SolidCap – 16" • OP2140-SolidCap – 20"	• OP2120-SlottedCap – 12" • OP2130-SlottedCap – 16" • OP2140-SlottedCap – 20"
	Catenary Suspension	• OP2122-ShortCap – 12" • OP2132-ShortCap – 16" • OP2142-ShortCap – 20"	• OP2122-SolidCap – 12" • OP2132-SolidCap – 16" • OP2142-SolidCap – 20"	• OP2122-SlottedCap – 12" • OP2132-SlottedCap – 16" • OP2142-SlottedCap – 20"
	Stem Suspension	• OP2124-ShortCap – 12" • OP2134-ShortCap – 16" • OP2144-ShortCap – 20"	• OP2124-SolidCap – 12" • OP2134-SolidCap – 16" • OP2144-SolidCap – 20"	• OP2124-SlottedCap – 12" • OP2134-SlottedCap – 16" • OP2144-SlottedCap – 20"
Indoor	Zume In	• CP7120-8 • CP7120-12 • CP7120-16 • CP7120-22	SUGGESTED VARIATIONS • Link fixtures together to create a chain • Custom cap options	
	Zume DL	• CP7122-12 • CP7122-16 • CP7122-22		

See [Visalighting.com/products/Zume-out](https://visalighting.com/products/Zume-out) for more information


OP2122 ZUME OUT (cont.)

Catenary Accessories

ACCESSORIES (Order Separately)


Power Connection Accessories

Quick Connect Jumper Cord
(AY-QC7P6-X)



Qty (1) per sku
X = cord length (in feet)
4 standard lengths
AY-QC7P6-1
AY-QC7P6-5
AY-QC7P6-10
AY-QC7P6-25
Custom lengths available
upon request

Power Cord
(AY-P6-50)




Black cord, 50 feet per sku
Custom lengths available
upon request

Power Cord Ties (AY-WT-100)




Qty (100) per sku

Liquid Tite Cord Grip
(AY-CG)




Qty (1) per sku

Quick Connectors (AY-QC7SET)



(1) plug, (1) socket per sku

Quick Connect 3-way splitter
(AY-QC3S)



Power Control - up to 3 fixtures
Qty (1) per sku

Accessories are made for Visa Lighting catenary applications. If sourced elsewhere, materials must be of equivalent grade.

For important information about accessory applications, see "[Catenary Design Guide](#)."
For technical specifications and installation information, see "[Installation Instructions](#)"

Catenary Suspension Accessories

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



50 feet per sku

Stainless Steel
Compression Sleeve
(AY-CS3/32)



Qty (10) per sku

Stainless Steel U-Bolts (AY-UBX/X)



Qty (1) per sku
X/X = catenary cable diameter
5 sizes
AY-UB3/16
AY-UB1/4
AY-UB3/8
AY-UB1/2
AY-UB5/8

Mounting Bracket
(AY-BRKT)



(1) stainless steel bracket with (2) washers, (2) #10, 1.5" screws per sku

CATENARY ACCESSORIES (Order Separately)[illegible]

OP2122 ZUME OUT (cont.)














Finishes



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

