

OP2130 ZUME™ OUT

16" Cord and Cable Suspension


VisaLighting.com/products/Zume-out

Type: _____ Project: _____ Location: _____



FRST globe


DIMENSIONS⁴

OAH MUST BE SPECIFIED


DIA = Diameter OAH = Overall Height X = Body Height WT=Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.
Example - OAH(42) indicates an overall fixture height of 42"

DIA 16" (406 mm)
X 16-1/4" (413 mm)
OAH 42" (1067 mm)
WT 9 lbs

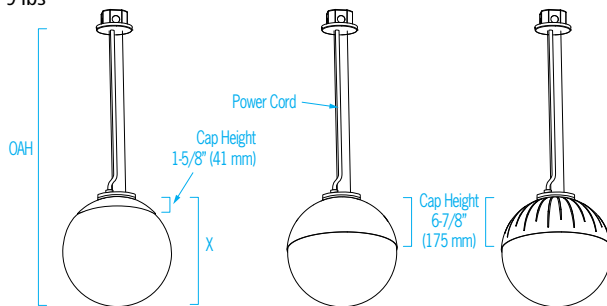


RELATIVE SCALE DRAWING

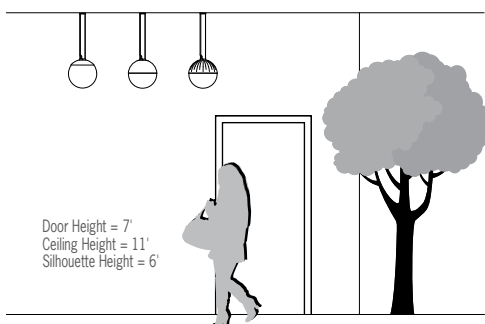


FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- High and low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- Tether cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish
- ETL listed for wet locations


PHOTOMETRICS




Short Cap White




Solid Cap White




Slotted Cap White



Short Cap Frosted



Solid Cap Frosted



Slotted Cap Frosted



IP65



ETL Listed



5 Year Warranty

Buy American
Compliant

OP2130 ZUME OUT (cont.)

16" Cord and Cable Suspension

Fill in shaded boxes using information listed below

OP2130		- MVOLT				
MODEL	CAP ¹	SOURCE ²	VOLTAGE MVOLT	CAP FINISH	DIFFUSER ³	OAH ⁴
	ShortCAP SolidCAP SlottedCAP	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		See last page for finish order codes	AC FRST	See page 1

CAP¹ (Select One)

ShortCAP	Short cap
SolidCAP	Solid cap
SlottedCAP	Slotted cap



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens						Power (Watts)
		Short Cap White	Short Cap FRST	Solid Cap White	Solid Cap FRST	Slotted Cap White	Slotted Cap FRST	
L30K(H)	3000K	2600	2900	1600	1800	2100	2600	27
L30K(L)	3000K	1700	1800	1000	1200	1300	1600	17
L35K(H)	3500K	2700	2900	1600	1900	2200	2600	27
L35K(L)	3500K	1700	1900	1000	1200	1400	1700	17
L40K(H)	4000K	2700	3000	1700	1900	2200	2700	27
L40K(L)	4000K	1800	1900	1100	1200	1400	1700	17


VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

DIFFUSER³ (Select One)

AC White acrylic globe

FRST Frosted translucent globe



White



Frosted Translucent

OP2130 ZUME OUT (cont.)

16" Cord and Cable Suspension



ZUME PRODUCT FAMILY

Zume Out – Outdoor	Cord and Cable Suspension	<ul style="list-style-type: none"> • OP2120-ShortCap – 12" • OP2130-ShortCap – 16" • OP2140-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2120-SolidCap – 12" • OP2130-SolidCap – 16" • OP2140-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2120-SlottedCap – 12" • OP2130-SlottedCap – 16" • OP2140-SlottedCap – 20"
	Catenary Suspension	<ul style="list-style-type: none"> • OP2122-ShortCap – 12" • OP2132-ShortCap – 16" • OP2142-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2122-SolidCap – 12" • OP2132-SolidCap – 16" • OP2142-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2122-SlottedCap – 12" • OP2132-SlottedCap – 16" • OP2142-SlottedCap – 20"
	Stem Suspension	<ul style="list-style-type: none"> • OP2124-ShortCap – 12" • OP2134-ShortCap – 16" • OP2144-ShortCap – 20" 	<ul style="list-style-type: none"> • OP2124-SolidCap – 12" • OP2134-SolidCap – 16" • OP2144-SolidCap – 20" 	<ul style="list-style-type: none"> • OP2124-SlottedCap – 12" • OP2134-SlottedCap – 16" • OP2144-SlottedCap – 20"
Indoor	Zume In	<ul style="list-style-type: none"> • CP7120-8 • CP7120-12 • CP7120-16 • CP7120-22 	<div>SUGGESTED VARIATIONS</div> <ul style="list-style-type: none"> • Link fixtures together to create a chain • Custom cap options 	
	Zume DL	<ul style="list-style-type: none"> • CP7122-12 • CP7122-16 • CP7122-22 		

See [Visalighting.com/products/Zume-out](https://visalighting.com/products/Zume-out) for more information

TETHER ACCESSORIES (Order Separately)

Stainless Steel
Compression Sleeve
(AY-CS3/32)



Qty (10)

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



50 feet

Accessory	Quantity

Accessories are made for Visa Lighting canopy mount fixture applications.
If sourced elsewhere, materials must be of equivalent grade.
For important information about accessory applications and installation, see [Installation Instructions](#)

OP2130 ZUME OUT (cont.)



Finishes



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	