


# OP2132 ZUME™ OUT

## 16" Catenary Suspension


[VisaLighting.com/products/Zume-out](https://VisaLighting.com/products/Zume-out)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

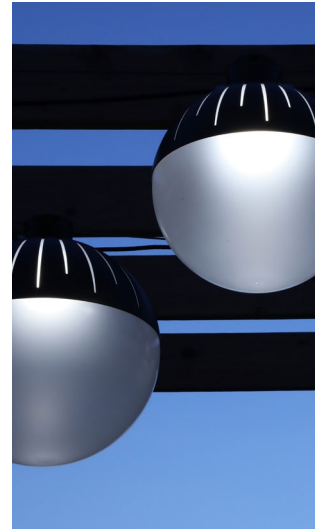

### DIMENSIONS<sup>5</sup>


### PCL MUST BE SPECIFIED

DIA = Diameter X = Body Height PCL = Power Cord Length WT=Weight


PCL is the distance (in inches) from the fixture to the end of the cord jacket or to the end of installed quick connect (for options including a quick connect)  
Example: PCL (60) indicates a power cord length of 60".

DIA 16" (406 mm)  
X 16-1/4" (413 mm) Add 1-3/4" to X value with MSC option  
PCL 60" (1524 mm)

EPA 2.4ft<sup>2</sup>  
WT 9 lbs

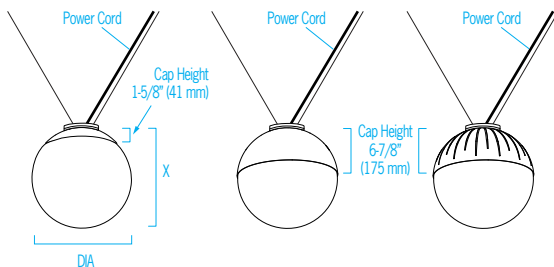


### RELATIVE SCALE DRAWING

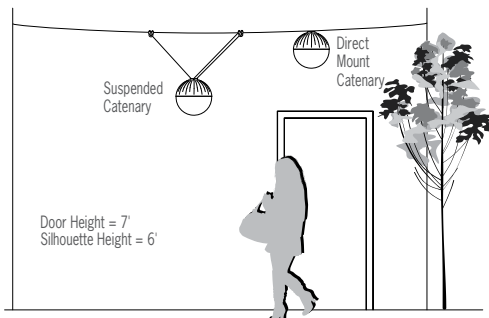


### FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- High and low lumen output
- Integral driver
- IP65 rated
- **Stainless steel structural cables are not included. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Cable connections to the fixture accept 1/8" to 1/4" diameter cables
- Fixtures may not be directly mounted to catenary cables over 1/4" diameter. Suspended mount must be used (see relative scale drawing)
- Crossing secondary cable is perpendicular to the primary cable and is limited to 1/8" when the primary cable is 1/4"
- Black power cord
- 3 spun aluminum cap styles (short, solid, slotted); cast aluminum mounting component
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- White acrylic diffuser or frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish
- ETL listed for wet locations


### PHOTOMETRICS




Short Cap White




Solid Cap White




Slotted Cap White



Short Cap Frosted



Solid Cap Frosted



Slotted Cap Frosted



IP65



ETL Listed



5 Year Warranty



Buy American  
Compliant

# OP2132 ZUME OUT (cont.)

## 16" Catenary Suspension

Fill in shaded boxes using information listed below

| OP2132 |                                    | - MVOLT                                                        |                  |                                            |                          |                       |                                         |
|--------|------------------------------------|----------------------------------------------------------------|------------------|--------------------------------------------|--------------------------|-----------------------|-----------------------------------------|
| MODEL  | CAP <sup>1</sup>                   | SOURCE <sup>2</sup>                                            | VOLTAGE<br>MVOLT | CAP FINISH                                 | CATENARY <sup>3</sup>    | DIFFUSER <sup>4</sup> | PCL (POWER<br>CORD LENGTH) <sup>5</sup> |
|        | ShortCAP<br>SolidCAP<br>SlottedCAP | L30K(H)<br>L30K(L)<br>L35K(H)<br>L35K(L)<br>L40K(H)<br>L40K(L) |                  | See last page<br>for finish<br>order codes | 1QC<br>2QC<br>MSC<br>SPC | AC<br>FRST            | See page 1                              |

CAP<sup>1</sup> (Select One)

|            |             |
|------------|-------------|
| ShortCAP   | Short cap   |
| SolidCAP   | Solid cap   |
| SlottedCAP | Slotted cap |



Short Cap (ShortCAP)



Solid Cap (SolidCAP)



Slotted Cap (SlottedCAP)

SOURCE<sup>2</sup> (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

| Source  | CCT   | Delivered Lumens   |                   |                    |                   |                      |                     | Power<br>(Watts) |
|---------|-------|--------------------|-------------------|--------------------|-------------------|----------------------|---------------------|------------------|
|         |       | Short Cap<br>White | Short Cap<br>FRST | Solid Cap<br>White | Solid Cap<br>FRST | Slotted Cap<br>White | Slotted Cap<br>FRST |                  |
| L30K(H) | 3000K | 2600               | 2900              | 1600               | 1800              | 2100                 | 2600                | 27               |
| L30K(L) | 3000K | 1700               | 1800              | 1000               | 1200              | 1300                 | 1600                | 17               |
| L35K(H) | 3500K | 2700               | 2900              | 1600               | 1900              | 2200                 | 2600                | 27               |
| L35K(L) | 3500K | 1700               | 1900              | 1000               | 1200              | 1400                 | 1700                | 17               |
| L40K(H) | 4000K | 2700               | 3000              | 1700               | 1900              | 2200                 | 2700                | 27               |
| L40K(L) | 4000K | 1800               | 1900              | 1100               | 1200              | 1400                 | 1700                | 17               |

VOLTAGE

MVOLT 120-277V, 50/60 Hz


CATENARY POWER CONNECTION<sup>3</sup> (Select One)

See page 3 for more information

|     |                                                               |
|-----|---------------------------------------------------------------|
| 1QC | One quick connect (factory installed)                         |
| 2QC | Two quick connects (factory installed)                        |
| MSC | Mid-run horizontal splice connection (mounted at top of unit) |
| SPC | Single power cord                                             |

DIFFUSER<sup>4</sup> (Select One)

|      |                           |
|------|---------------------------|
| AC   | White acrylic globe       |
| FRST | Frosted translucent globe |



White



Frosted Translucent


# OP2132 ZUME OUT (cont.)

## 16" Catenary Suspension



### CATENARY OPTION ILLUSTRATIONS

See page 4 for additional accessories

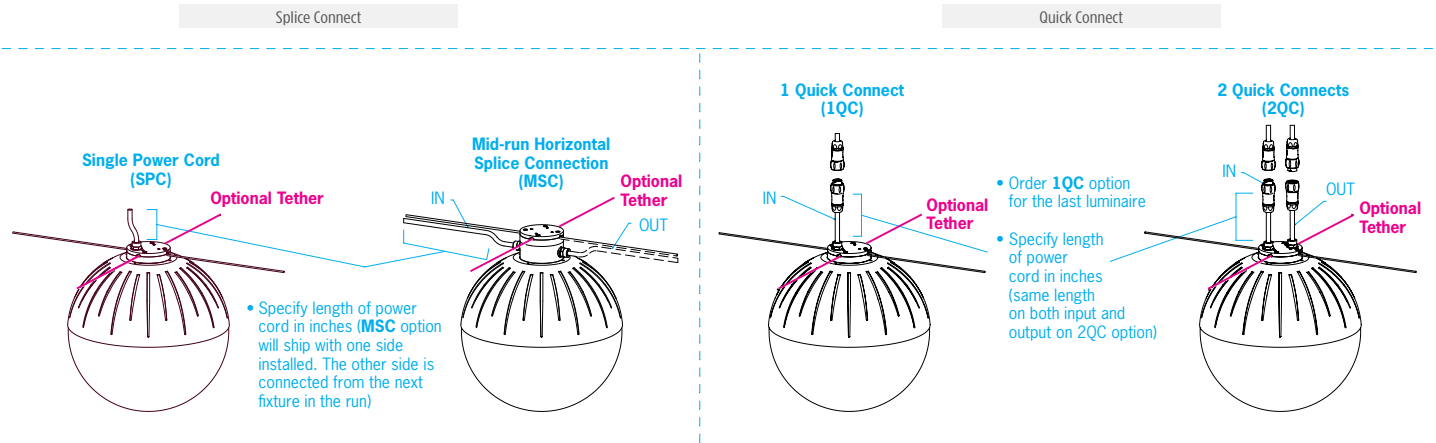


### ZUME PRODUCT FAMILY

|                    |                           |                                                                                                                                             |                                                                                                                                                        |                                                                                                                                                   |
|--------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Zume Out – Outdoor | Cord and Cable Suspension | <ul style="list-style-type: none"> <li>• OP2120-ShortCap – 12"</li> <li>• OP2130-ShortCap – 16"</li> <li>• OP2140-ShortCap – 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2120-SolidCap – 12"</li> <li>• OP2130-SolidCap – 16"</li> <li>• OP2140-SolidCap – 20"</li> </ul>            | <ul style="list-style-type: none"> <li>• OP2120-SlottedCap – 12"</li> <li>• OP2130-SlottedCap – 16"</li> <li>• OP2140-SlottedCap – 20"</li> </ul> |
|                    | Catenary Suspension       | <ul style="list-style-type: none"> <li>• OP2122-ShortCap – 12"</li> <li>• OP2132-ShortCap – 16"</li> <li>• OP2142-ShortCap – 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2122-SolidCap – 12"</li> <li>• OP2132-SolidCap – 16"</li> <li>• OP2142-SolidCap – 20"</li> </ul>            | <ul style="list-style-type: none"> <li>• OP2122-SlottedCap – 12"</li> <li>• OP2132-SlottedCap – 16"</li> <li>• OP2142-SlottedCap – 20"</li> </ul> |
|                    | Stem Suspension           | <ul style="list-style-type: none"> <li>• OP2124-ShortCap – 12"</li> <li>• OP2134-ShortCap – 16"</li> <li>• OP2144-ShortCap – 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2124-SolidCap – 12"</li> <li>• OP2134-SolidCap – 16"</li> <li>• OP2144-SolidCap – 20"</li> </ul>            | <ul style="list-style-type: none"> <li>• OP2124-SlottedCap – 12"</li> <li>• OP2134-SlottedCap – 16"</li> <li>• OP2144-SlottedCap – 20"</li> </ul> |
| Indoor             | Zume In                   | <ul style="list-style-type: none"> <li>• CP7120-8</li> <li>• CP7120-12</li> <li>• CP7120-16</li> <li>• CP7120-22</li> </ul>                 | <b>SUGGESTED VARIATIONS</b> <ul style="list-style-type: none"> <li>• Link fixtures together to create a chain</li> <li>• Custom cap options</li> </ul> |                                                                                                                                                   |
|                    | Zume DL                   | <ul style="list-style-type: none"> <li>• CP7122-12</li> <li>• CP7122-16</li> <li>• CP7122-22</li> </ul>                                     |                                                                                                                                                        |                                                                                                                                                   |

See [Visalighting.com/products/Zume-out](https://visalighting.com/products/Zume-out) for more information


## Power Connection Accessories

Quick Connect Jumper Cord  
(AY-QC7P6-X)



Qty (1) per sku  
X = cord length (in feet)  
4 standard lengths  
AY-QC7P6-1  
AY-QC7P6-5  
AY-QC7P6-10  
AY-QC7P6-25  
Custom lengths available  
upon request

Power Cord  
(AY-P6-50)




Black cord, 50 feet per sku  
Custom lengths available  
upon request

### Power Cord Ties (AY-WT-100)




Qty (100) per sku

Liquid Tite Cord Grip  
(AY-CG)




Qty (1) per sku

### Quick Connectors (AY-QC7SET)



(1) plug, (1) socket per sku

Quick Connect 3-way splitter  
(AY-QC3S)



Power Control - up to 3 fixtures  
Qty (1) per sku

Accessories are made for Visa Lighting catenary applications. If sourced elsewhere, materials must be of equivalent grade.

For important information about accessory applications, see "[Catenary Design Guide](#)."  
For technical specifications and installation information, see "[Installation Instructions](#)"

## Catenary Suspension Accessories

3/32" Stainless Steel Cable  
(AY-CBL3/32-50)



50 feet per sku

Stainless Steel  
Compression Sleeve  
(AY-CS3/32)



Qty (10) per sku

### Stainless Steel U-Bolts (AY-UBX/X)



Qty (1) per sku  
X/X = catenary cable diameter  
5 sizes  
AY-UB3/16  
AY-UB1/4  
AY-UB3/8  
AY-UB1/2  
AY-UB5/8

Mounting Bracket  
(AY-BRKT)



(1) stainless steel bracket with (2) washers, (2) #10, 1.5" screws per sku

### CATENARY ACCESSORIES (Order Separately)

[illegible]

# OP2132 ZUME OUT (cont.)
















## Finishes



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

|                                                                                   |                                                                                    |                                                                                    |                                                                                    |                                                                                     |                                                                                      |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   |   |   |   |   |   |  |
| <b>AGGY</b> Agate Grey                                                            | <b>ALGN</b> Alpine Green                                                           | <b>BMAT</b> Bronze Matte                                                           | <b>BRNZ</b> Bronze                                                                 | <b>BSIL</b> Blade Silver                                                            | <b>CVBL</b> Cove Blue                                                                | <b>DEOR</b> Deoro Gold                                                              |
|   |   |   |   |   |   |  |
| <b>GLWT</b> Glacier White                                                         | <b>GSIL</b> Graphite Silver                                                        | <b>HRGR</b> Harbor Grey                                                            | <b>JTBK</b> Jet Black                                                              | <b>OCBL</b> Ocean Blue                                                              | <b>SHGR</b> Shoreline Grey                                                           | <b>SBGN</b> Sagebrush Green                                                         |
|  |  |  |  |  |  |                                                                                     |
| <b>SLGR</b> Slate Grey                                                            | <b>SSTP</b> Sierra Taupe                                                           | <b>TRCN</b> Terracotta Canyon                                                      | <b>TRWT</b> Traffic White                                                          | <b>VBLK</b> Velvet Black                                                            | <b>VNRD</b> Vineyard Red                                                             |                                                                                     |

