OP2242/ OP2243/ OP2244 SEQUENCE™

4" Diameter Outdoor Pendants - Stem Suspension



VisaLighting.com/products/Sequence

Type: Project: Location:







DIMENSIONS^{1, 4}

OAH MUST BE SPECIFIED

DIA = Diameter X = Body Height OAH = Overall Height Y = Driver Compartment Height


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(48) indicates an overall fixture height of 48"

	0P2242	OP2243	0P2244					
X	33-1/4" (845 mm)	44-1/4" (1124 mm)	55-1/4" (1403 mm)					
DIA	4" (102 mm)							
Υ	9" (229 mm)							
MIN OAH	38-1/4" (972 mm)	49-1/4" (1251 mm	60-1/4" (1531 mm)					
OAH	48" (1219 mm)	60" (1524 mm)	72" (1829 mm)					
MAX OAH	128" (3251 mm)	138" (3505 mm)	150" (3810 mm)					


FEATURES


- High or low lumen output
- Integral driver (compartment at top of fixture)
- RGB is DMX controlled with RDM for digital addressing
- Mounts to standard 8" octagonal junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer
- Matte white acrylic diffuser
- Driver compartment acrylic is painted with low VOC acrylic-urethane wet paint with anti-graffiti additive
- No VOC powder coat finish on end caps and mounting component
- ETL listed for wet locations

RELATIVE SCALE DRAWING



PHOTOMETRICS












OP2242/ OP2243/ OP2244 SEQUENCE (cont.)



4" Diameter Outdoor Pendants – Stem Suspension

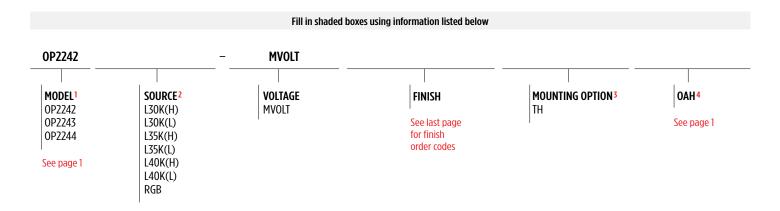

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source		0P2	242	0P22	243	0P2244		
	ССТ	Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts	
L30K(H)	3000K	1100	12	2000	22	2600	29	
L30K(L)	3000K	750	8	1300	14	1700	18	
L35K(H)	3500K 1100		12	2000	22	2600	29	
L35K(L)	3500K	750	8	1300	14	1700	18	
L40K(H)	4000K	1100	12	2000	22	2600	29	
L40K(L)	4000K	K 750 8		1300	14	1700	18	
RGB			14		21		29	

VOLTAGE

MVOLT 120-277V, 50/60 Hz

LUMEN MAINTENANCE RATING

L80 (reported) >60,000 hrs

MOUNTING OPTION³

TH Top tether option; four 15' cable tethers

Tether Example



OP2242/ OP2243/ OP2244 SEQUENCE (cont.)



4" Diameter Outdoor Pendants – Stem Suspension

SEQUENCE OUTDOOR PENDANT PRODUCT FAMILY

Catenary	4" Diameter	• OP2232, OP2233, OP2234				
	8" Diameter	• OP2262, OP2263, OP2264				
Cord and Cable	4" Diameter	• OP2222, OP2223, OP2224				
	8" Diameter	• OP2252, OP2253, OP2254				
Stem	4" Diameter	• OP2242, OP2243, OP2244				
	8" Diameter	• OP2272, OP2273, OP2274				

SUGGESTED VARIATIONS

- · Remote driver
- · Custom colors

See Visalighting.com/Products/Sequence for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold
GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red	-	