


OP2262/OP2263/OP2264 SEQUENCE™

8" Diameter Outdoor Pendants – Catenary Suspension


VisaLighting.com/products/Sequence

Type: _____ Project: _____ Location: _____

Factory submittal drawing required

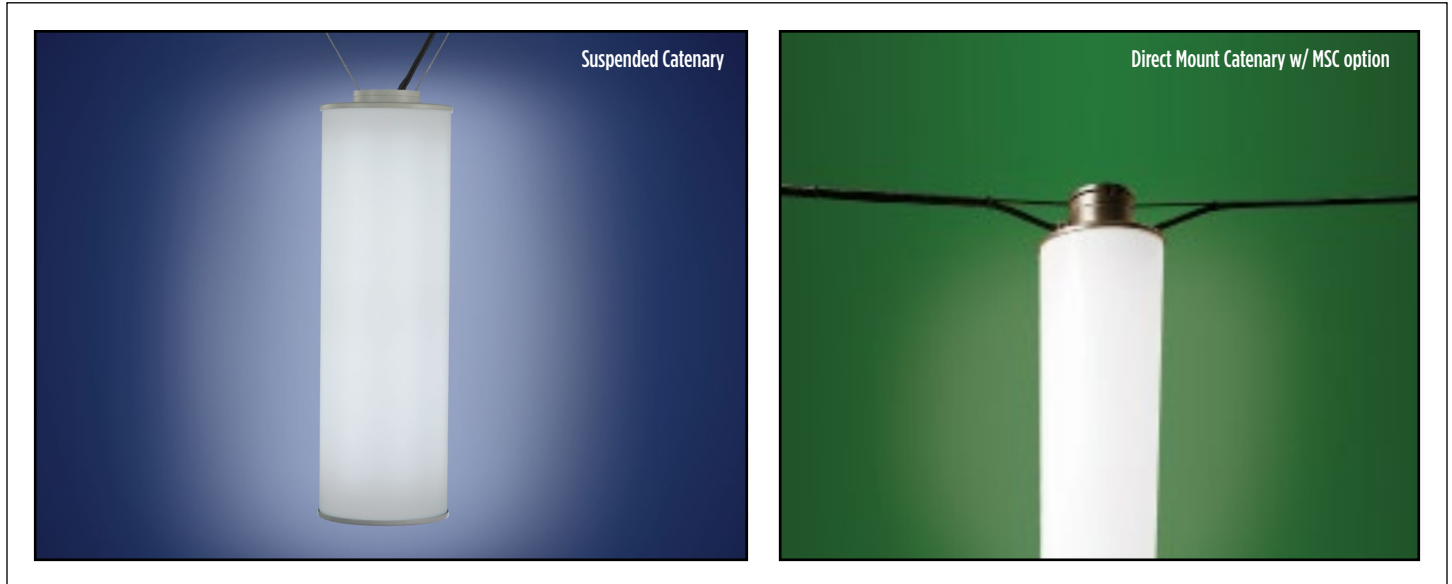

DIMENSIONS⁴



PCL MUST BE SPECIFIED

DIA = Diameter X = Body Height PCL = Power Cord Length
EPA = Effective Projected Area WT = Weight

PCL is the distance (in inches) from the fixture to the end of the cord jacket or to the end of installed quick connect (for options including a quick connect)
Example: PCL (60) indicates a power cord length of 60". Minimum PCL = 5"

	OP2262	OP2263	OP2264
X	25" (635 mm)	36" (914 mm)	47" (1194 mm)
X w/ BTH option	Add 1/2" to X	Add 1" to X	
X w/ MSC option	Add 1-3/4" to X		
DIA	8" (203 mm)		
PCL	60" (1524 mm)		
EPA	1.4ft²	2.0ft²	2.9ft²
WT	14 lbs	18 lbs	22 lbs


RELATIVE SCALE DRAWING

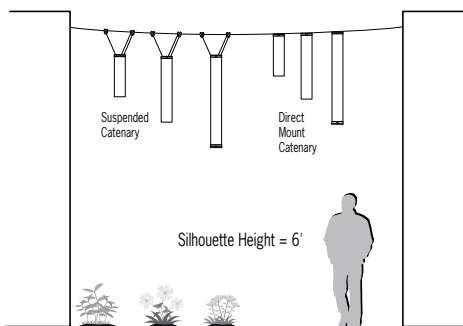

FEATURES

- High or low lumen output
- Integral driver
- RGB is DMX controlled with RDM for digital addressing
- IP65 rated
- **Stainless steel structural cables are not included. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Fixtures may not be directly mounted to catenary cables over 1/4" diameter. Suspended mount must be used (see relative scale drawing)
- Crossing secondary cables are perpendicular to the primary cable and are limited to 1/8" when the primary cable is 1/4"
- Black power cord
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- Matte white acrylic diffuser
- No VOC powder coat finish on end caps and mounting component
- ETL listed for wet locations

PHOTOMETRICS



Compliant



IP65



ETL Listed



5 Year Warranty

OP2262/OP2263/OP2264 SEQUENCE (cont.)

8" Diameter Outdoor Pendants – Catenary Suspension



Fill in shaded boxes using information listed below

OP2262		MVOLT			
MODEL¹ OP2262 OP2263 OP2264 See page 1	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) RGB	VOLTAGE MVOLT	FINISH See last page for finish order codes	CATENARY POWER CONNECTION³ 1QC 2QC MSC SPC BTH+1QC BTH+2QC BTH+MSC BTH+SPC	POWER CORD LENGTH⁴ See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OP2262		OP2263		OP2264	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	4300	48	7600	86	9800	110
L30K(L)	3000K	2800	35	5100	56	6500	72
L35K(H)	3500K	4300	48	7600	86	9800	110
L35K(L)	3500K	2800	35	5100	56	6500	72
L40K(H)	4000K	4400	48	7800	86	10100	110
L40K(L)	4000K	2900	35	5200	56	6700	72
RGB			29		43		57

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------

LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------

CATENARY POWER CONNECTION OPTION³ (Select One)

1QC	One quick connect (factory installed)
2QC	Two quick connects (factory installed)
MSC	Mid-run horizontal splice connection
SPC	Single power cord attachment
BTH+1QC	Bottom tether attachment + one quick connect
BTH+2QC	Bottom tether attachment + two quick connects
BTH+MSC	Bottom tether attachment + mid-run splice connection
BTH+SPC	Bottom tether attachment + single power cord

Tether options are recommended for high wind. A tether cable is intended to restrict the movement of the light fixture and not provide structural support. See [Catenary Design Guide](#) for important information and warnings


OP2262/OP2263/OP2264 SEQUENCE (cont.)

8" Diameter Outdoor Pendants – Catenary Suspension




CATENARY OPTION ILLUSTRATIONS

Splice Connect

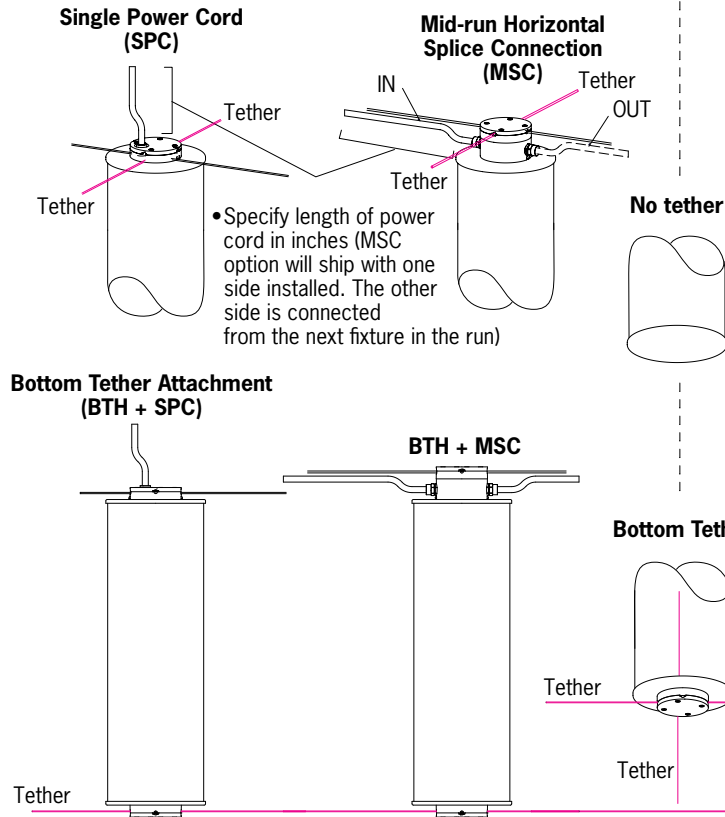

Quick Connect

(Factory Installed)

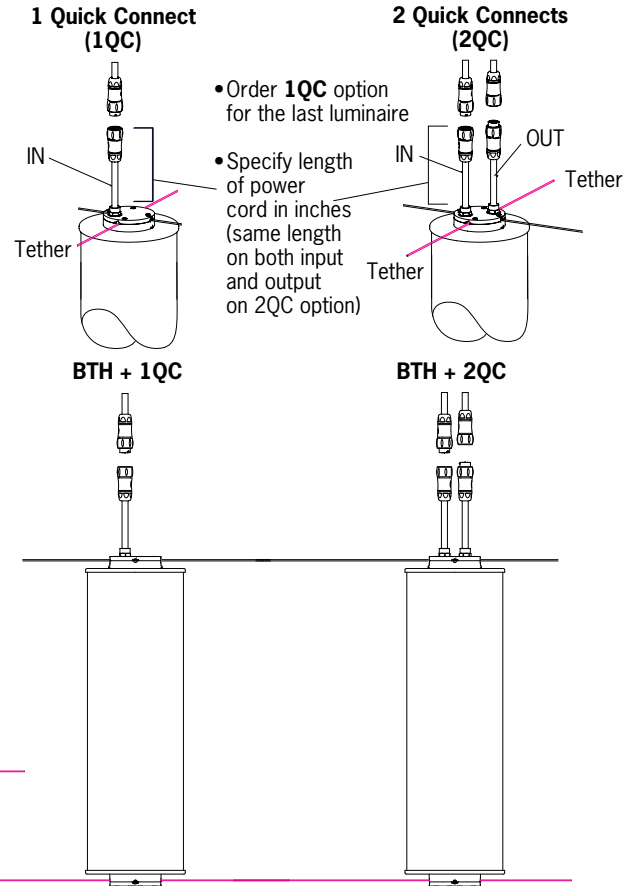


OP2262/OP2263/OP2264 SEQUENCE (cont.)

Additional Catenary Accessories — Outdoor pendants


ACCESSORIES (Order Separately)

Power Connection Accessories

Quick Connect Jumper Cord
(AY-QC7P6-X)



Qty (1) per sku
X = cord length (in feet)
4 standard lengths
AY-QC7P6-1
AY-QC7P6-5
AY-QC7P6-10
AY-QC7P6-25
Custom lengths available
upon request

Power Cord
(AY-P6-50)


Black cord, 50 feet per sku
Custom lengths available
upon request

Power Cord Ties (AY-WT-100)




Qty (100) per sku

Liquid Tite Cord Grip
(AY-CG)




Qty (1) per sku

Quick Connectors (AY-QC7SET)



(1) plug, (1) socket per sku

Quick Connect 3-way splitter
(AY-QC3S)



Power Control - up to 3 fixtures
Qty (1) per sku

Accessories are made for Visa Lighting catenary applications.
If sourced elsewhere, materials must be of equivalent grade.

For important information about accessory applications, see "[Catenary Design Guide](#)." For technical specifications and installation information, see "[Installation Instructions](#)"

Catenary Suspension Accessories

3/32" Stainless Steel Cable
(AY-CBL3/32-50)



50 feet per sku

Stainless Steel
Compression Sleeve
(AY-CS3/32)



Qty (10) per sku

Stainless Steel U-Bolts (AY-UBX/X)



Qty (1) per sku
X/X = catenary cable diameter
5 sizes
AY-UB3/16
AY-UB1/4
AY-UB3/8
AY-UB1/2
AY-UB5/8

Mounting Bracket
(AY-BRKT)



(1) stainless steel bracket with (2)
washers, (2) #10, 1.5" screws
per sku

CATENARY ACCESSORIES (Order Separately)

[illegible]

OP2262/OP2263/OP2264 SEQUENCE (cont.)

8" Diameter Outdoor Pendants – Catenary Suspension



SEQUENCE OUTDOOR PENDANT PRODUCT FAMILY

Catenary	4" Diameter	• OP2232 , OP2233 , OP2234
	8" Diameter	• OP2262 , OP2263 , OP2264
Cord and Cable	4" Diameter	• OP2222 , OP2223 , OP2224
	8" Diameter	• OP2252 , OP2253 , OP2254
Stem	4" Diameter	• OP2242 , OP2243 , OP2244
	8" Diameter	• OP2272 , OP2273 , OP2274

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/Products/Sequence](https://visalighting.com/Products/Sequence) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red	

