

OP2272/ OP2273/ OP2274 SEQUENCE™

8" Diameter Outdoor Pendants – Stem Suspension


VisaLighting.com/products/Sequence

Type: _____ Project: _____ Location: _____



DIMENSIONS^{1,4}

OAH MUST BE SPECIFIED

DIA = Diameter X = Body Height OAH = Overall Height


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(48) indicates an overall fixture height of 48"

	OP2272	OP2273	OP2274
X	25" (635 mm)	36" (914 mm)	47" (1194 mm)
DIA	8" (203 mm)		
MIN OAH	30" (762 mm)	41" (1041 mm)	52" (1321 mm)
OAH	48" (1219 mm)	60" (1524 mm)	72" (1829 mm)
MAX OAH	116" (2946 mm)	128" (3251 mm)	140" (3556 mm)


FEATURES

- High or low lumen output
- Integral driver
- RGB is DMX controlled with RDM for digital addressing
- Mounts to standard 8" octagonal junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Matte white acrylic diffuser
- No VOC powder coat finish on end caps and mounting component
- ETL listed for wet locations

RELATIVE SCALE DRAWING

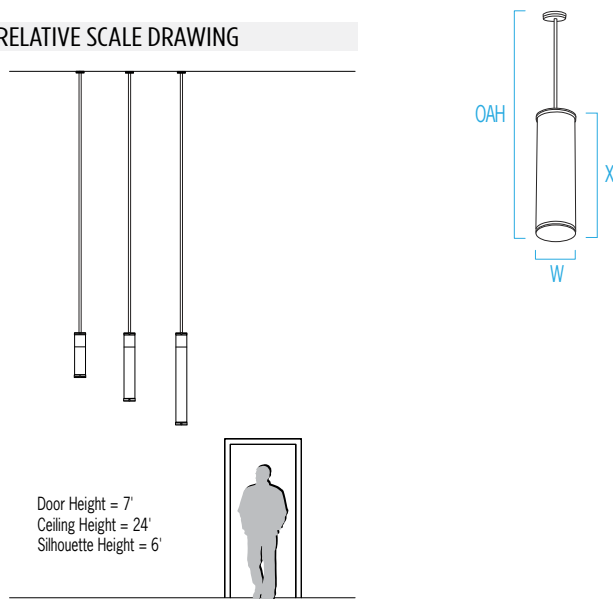

PHOTOMETRICS

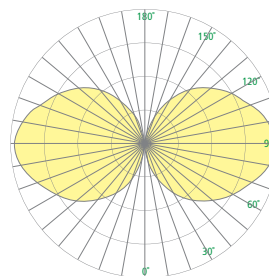

Compliant



ETL Listed



5 Year Warranty

OP2272/ OP2273/ OP2274 SEQUENCE (cont.)

8" Diameter Outdoor Pendants – Stem Suspension



Fill in shaded boxes using information listed below

OP2272		-	MVOLT						
MODEL¹ OP2272 OP2273 OP2274 See page 1	SOURCE² L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) RGB		VOLTAGE MVOLT		FINISH See last page for finish order codes		MOUNTING OPTION³ TH		OAH⁴ See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	OP2272		OP2273		OP2274	
		Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts	Delivered Lumens	Power/Watts
L30K(H)	3000K	4300	48	7600	86	9800	110
L30K(L)	3000K	2800	35	5100	56	6500	72
L35K(H)	3500K	4300	48	7600	86	9800	110
L35K(L)	3500K	2800	35	5100	56	6500	72
L40K(H)	4000K	4400	48	7800	86	10100	110
L40K(L)	4000K	2900	35	5200	56	6700	72
RGB			29		43		57

VOLTAGE

MVOLT	120-277V, 50/60 Hz
--------------	--------------------


LUMEN MAINTENANCE RATING

L80 (reported)	>60,000 hrs
----------------	-------------

MOUNTING OPTION³

TH	Top tether option; four 15' cable tethers
-----------	-------------------------------------------

Tether Example

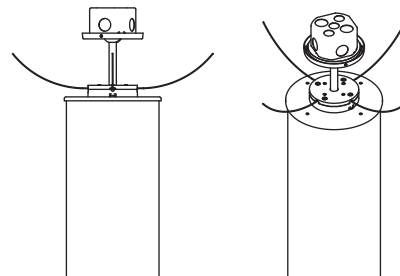

OP2272/ OP2273/ OP2274 SEQUENCE (cont.)

8" Diameter Outdoor Pendants – Stem Suspension



SEQUENCE OUTDOOR PENDANT PRODUCT FAMILY

Catenary	4" Diameter	• OP2232 , OP2233 , OP2234
	8" Diameter	• OP2262 , OP2263 , OP2264
Cord and Cable	4" Diameter	• OP2222 , OP2223 , OP2224
	8" Diameter	• OP2252 , OP2253 , OP2254
Stem	4" Diameter	• OP2242 , OP2243 , OP2244
	8" Diameter	• OP2272 , OP2273 , OP2274

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/Products/Sequence](https://visalighting.com/Products/Sequence) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

