

OP3630 LATERNA

Cord and Cable Suspension



VisaLighting.com/products/Laterna

Type: _____ Project: _____ Location: _____




DIMENSIONS³

OAH MUST BE SPECIFIED


W = Width OAH = Overall Height X = Body Height
Y = Diffuser Height WT = Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"

W	17-1/2"	(445 mm)
OAH	48"	(1219 mm)
X	19-1/8"	(486 mm)
Y	12-1/4"	(311 mm)
WT	12 lbs	




RELATIVE SCALE DRAWING

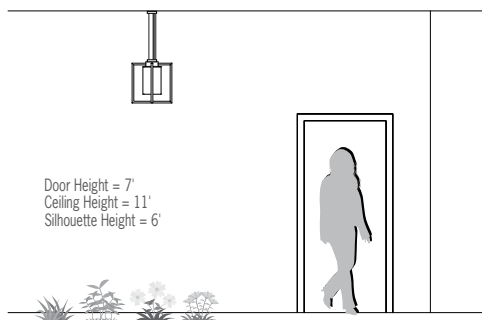


FEATURES

- High and low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- Aluminum weldment cage; cast aluminum mounting component
- Tether cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer
- Tether cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Black power cord
- Fixture body tested to ANSI C136.31 'American National Standard for Roadway and Area Lighting Equipment' at or above 3G vibration levels for 100,000 cycles in X, Y, Z axes
- Matte white acrylic diffuser or optional frosted translucent acrylic diffuser; UV stable; UL-94 Flame class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations

PHOTOMETRICS



Frosted Cylinder



White Cylinder



Compliant



IP65



ETL Listed



5 Year Warranty

OP3630 LATERNA (cont.)

Cord and Cable Suspension

Fill in shaded boxes using information listed below

OP3630		-		MVOLT							
MODEL		SOURCE ¹		VOLTAGE		FINISH		DIFFUSER OPTION ²		OAH ³	
		L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)		MVOLT		See last page for finish order codes		FRST Cylinder is white acrylic if no option is selected.		See page 1	

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT	Delivered Lumens		Power (Watts)
		White Cylinder	Frosted Cylinder	
L30K(H)	3000K	2400	2900	29
L30K(L)	3000K	1500	1900	18
L35K(H)	3500K	2500	3000	29
L35K(L)	3500K	1600	1900	18
L40K(H)	4000K	2500	3000	29
L40K(L)	4000K	1600	1900	18

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

DIFFUSER OPTION²

Cylinder is matte white if no option is selected

FRST	Frosted translucent cylinder
------	------------------------------



TETHER ACCESSORIES (Order separately)

Stainless Steel
Compression Sleeve
(AY-CS3/32)



Qty (10)

Stainless Steel
Compression Sleeve
(AY-CS3/32)



50 feet

Accessory	Quantity

Accessories are made for Visa Lighting canopy mount fixture applications.

If sourced elsewhere, materials must be of equivalent grade.

For important information about accessory applications and installation, see Installation Instructions

OP3630 LATERNA (cont.)

Cord and Cable Suspension



LATERNA PRODUCT FAMILY

- OP3630 – Cord and Cable Suspension
- OP3632 – Catenary Suspension
- OP3634 – Stem Suspension

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Laterna](https://visalighting.com/products/Laterna) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

