


OP3634 LATERNA

Stem Suspension


VisaLighting.com/products/Laterna

Type: _____ Project: _____ Location: _____

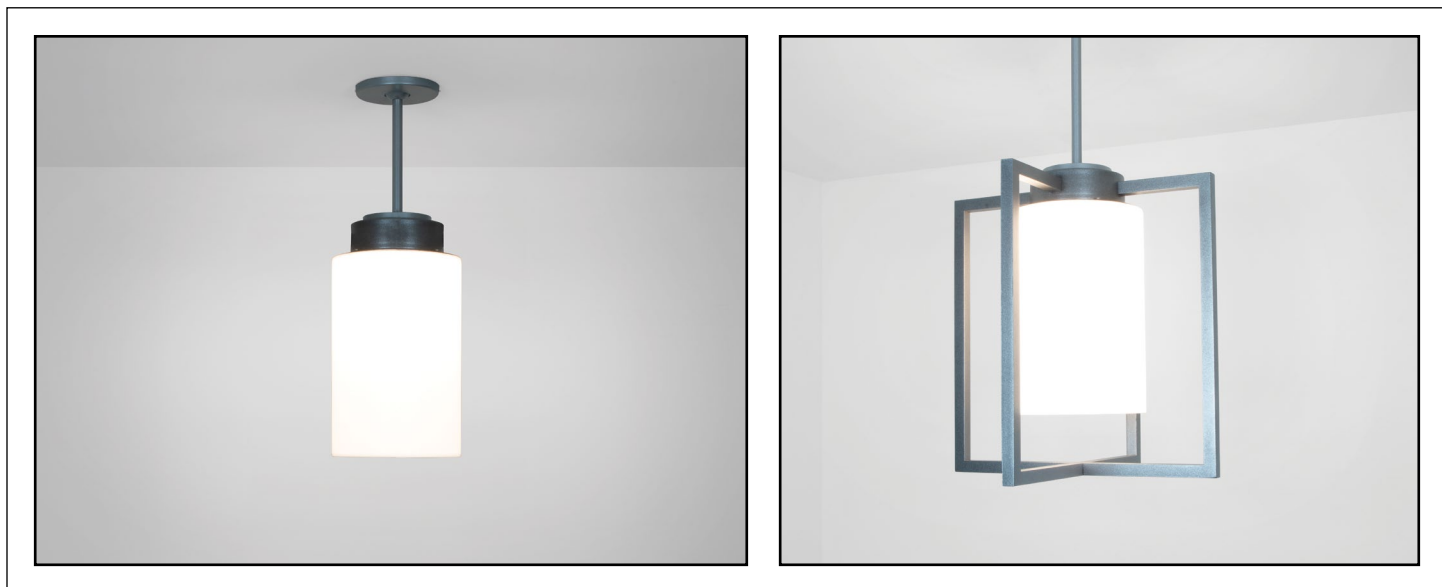

DIMENSIONS⁴


OAH MUST BE SPECIFIED

W = Width OAH = Overall Height X = Body Height
Y = Diffuser Height WT = Weight MAX OAH = Maximum Overall Height

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"

| | | |
|---------|---------|-----------|
| W | 17-1/2" | (445 mm) |
| OAH | 48" | (1219 mm) |
| MAX OAH | 114" | (2896 mm) |
| X | 19-1/8" | (486 mm) |
| Y | 12-1/4" | (311 mm) |
| WT | 15 lbs | |


Stem weight = 0.1 lb/in, to determine hanging weight, add or subtract this weight from the standard OAH Weight




FEATURES

- High and low lumen output
- Integral driver
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- Aluminum weldment cage; cast aluminum mounting component
- **Top tether option. Cables connecting fixtures to each other or to structural elements are to be designed by a qualified structural engineer**
- Matte white acrylic diffuser or optional frosted translucent acrylic diffuser; UV stable; UL-94 Flame Class rated
- No VOC powder coat finish; 16 color options
- ETL listed for wet locations


RELATIVE SCALE DRAWING

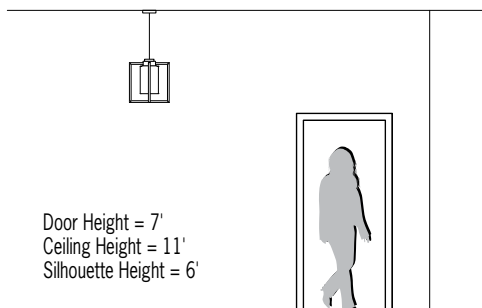

PHOTOMETRICS



Frosted Cylinder



White Cylinder



Compliant



ETL Listed



5 Year Warranty

OP3634 LATERNA (cont.)

Stem Suspension

Fill in shaded boxes using information listed below

| OP3634 | | - MVOLT | | | | | | | |
|--------|---|------------------|--|--|----------------------------------|------------------------------------|--|--|--|
| MODEL | SOURCE ¹ L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) | VOLTAGE MVOLT | FINISH See last page for finish order codes | DIFFUSER OPTION ² FRST Cylinder is white acrylic if no option is selected | TETHER OPTION ³ TH | OAH ⁴ See page 1 | | | |

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

| Source | CCT | Delivered Lumens | | Power (Watts) |
|---------|-------|------------------|------------------|---------------|
| | | White Cylinder | Frosted Cylinder | |
| L30K(H) | 3000K | 2400 | 2900 | 29 |
| L30K(L) | 3000K | 1500 | 1900 | 18 |
| L35K(H) | 3500K | 2500 | 3000 | 29 |
| L35K(L) | 3500K | 1600 | 1900 | 18 |
| L40K(H) | 4000K | 2500 | 3000 | 29 |
| L40K(L) | 4000K | 1600 | 1900 | 18 |

VOLTAGE

MVOLT 120-277V, 50/60 Hz



DIFFUSER OPTION²

Cylinder is matte white if no option is selected

| | |
|------|------------------------------|
| FRST | Frosted translucent cylinder |
|------|------------------------------|

TETHER OPTION³

TH Top tether option; four 15' cable tethers included

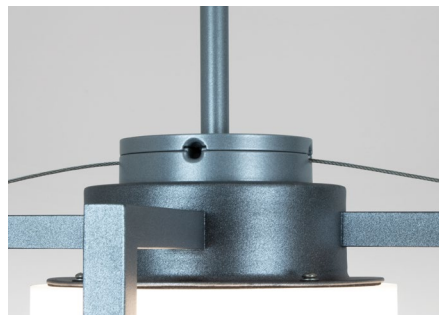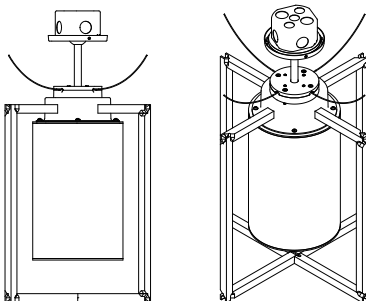

Tether Option Cap



OP3634 LATERNA (cont.)

Stem Suspension



LATERNA PRODUCT FAMILY

- OP3630 – Cord and Cable Suspension
- OP3632 – Catenary Suspension
- OP3634 – Stem Suspension

SUGGESTED VARIATIONS

- Remote driver
- Custom colors

See [Visalighting.com/products/Laterna](https://visalighting.com/products/Laterna) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

| | | | | | | |
|--|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| AGGY Agate Grey | ALGN Alpine Green | BMAT Bronze Matte | BRNZ Bronze | BSIL Blade Silver | CVBL Cove Blue | DEOR Deoro Gold |
|  |  |  |  |  |  |  |
| GLWT Glacier White | GSIL Graphite Silver | HRGR Harbor Grey | JTBK Jet Black | OCBL Ocean Blue | SHGR Shoreline Grey | SBGN Sagebrush Green |
|  |  |  |  |  |  | |
| SLGR Slate Grey | SSTP Sierra Taupe | TRCN Terracotta Canyon | TRWT Traffic White | VBLK Velvet Black | VNRD Vineyard Red | |

