$AVATAR^{\mathsf{TM}}$ outdoor – dual accent bar OW1311/OW1313/OW1315/OW1317





VisaLighting.com/products/Avatar

Project: Type: Location:











DIMENSIONS1

Depth is measured from wall to front of fixture

L = Length D = Depth W = Width

	OW1311 OW1313		OW1315	OW1317	
L	19-3/4" (502 mm)	25-1/8" (638 mm)	36-1/8" (918 mm)	47-1/4" (1200 mm)	
D	4" (102 mm)				
W	7-1/4" (184 mm)				

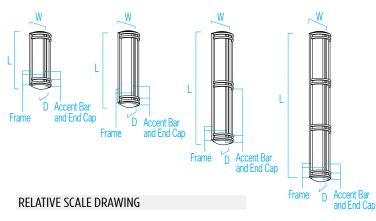




FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- · Modular design for replacement of LED source and integral driver
- Vertical mounting standard (horizontal mounting optional)
- Mounts to standard electrical junction box (by others) and wall with provided hardware
- Removable cam-action hinged frame for ease of maintenance
- Extruded aluminum backplate and center accent, die-cast end caps. Solid metal or die-cast accent
- Sealed and gasketed construction
- High impact white acrylic diffuser
 - F1 rated, UV stable
 - UL-94 HB Flame Class rated
- No VOC powder coat paint or stainless steel finish
- ETL listed for wet location mounting 4' above grade

PHOTOMETRICS













AVATAR OUTDOOR – DUAL ACCENT BAR (cont.) OW1311/OW1313/OW1315/OW1317



Fill in shaded boxes using information listed below **MVOLT** MODEL1 SOURCE² **VOLTAGE FRAME FINISH ACCENT BAR AND** OPTION(S)3 **END CAP FINISH** OW1311 • L30K(H) MVOLT HMSee last page OW1313 • L30K(L) XPS for finish See last page OW1315 L35K(H) order codes for finish See page 1 OW1317 L35K(L) order codes • L40K(H) See page 1 • L40K(L)

SOURCE² (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

	ССТ	OW1311		OW1313		OW1315		OW1317	
Source		Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts
• L30K(H)	3000K	1200	15	1600	19	2400	29	3300	38
• L30K(L)	3000K	800	9	1100	13	1600	19	2200	25
L35K(H)	3500K	1200	15	1600	19	2400	29	3300	38
L35K(L)	3500K	800	9	1100	13	1600	19	2200	25
• L40K(H)	4000K	1200	15	1700	19	2500	29	3400	38
• L40K(L)	4000K	800	9	1100	13	1700	19	2200	25

VOLTAGE

MVOLT	120-277V, 50/60 Hz

LUMEN MAINTENANCE RATING		
L90 (reported)	≥50,400 hrs	

OPTIONS³ (Multiple Selections Allowed)

▲ Option availability may be interdependent with Other Options

НМ	Horizontal mount (vertical is standard)	
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS	

AVATAR OUTDOOR – DUAL ACCENT BAR (cont.) OW1311/OW1313/OW1315/OW1317



AVATAR PRODUCT FAMILY

	Single Bar	• 0W1301, 0W1303, 0W1305, 0W1307		
Outdoor	Dual Bars	• 0W1311, 0W1313, 0W1315, 0W1317		
	Perforated	• 0W1331, 0W1333, 0W1335, 0W1337		
la da au	Single Bar	• CV2009, CV2011, CV2013, CV2015		
Indoor	Dual Bars	• CV2025, CV2027, CV2029, CV2031		

See <u>Visalighting.com/Products/Avatar</u> for more information

SUGGESTED VARIATIONS

- Increase length
- Add/remove bar stock

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



– Premium metals for Accent Bar and End Caps only

Metal Finishes (Premium)



This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved. Visa Lighting reserves the right to change specifications for product improvement without notification.