OW2306 SCOPE™

Cast Body - Downlight (or Uplight) Only



VisaLighting.com/products/Scope

Type: Project: Location:





DIMENSIONS

Depth is measured from wall to front of fixture

W = Width $H = Height$ $D = De$	pth
---------------------------------	-----

 W
 3-7/8" (98 mm)

 H
 15" (381 mm)


 D
 5-1/4" (133 mm)

 D
 (with JBC option)

 5-1/2" (140 mm)

For mullion mounting: Minimum required mullion width is 3"


May be mounted in inverse position.




FEATURES

- Integral driver (unless RMD option is selected)
- 0-10V dimming to 10%
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- May be mounted in inverse position
- Surface mount to 2x4 junction box or window mullion. Mullion mount requires RMD option and minimum 3" mullion. Optional junction box cover (JBC) is available for 4x4 or octagonal junction box
- Tamper resistant fasteners
- · Cast aluminum body
- No VOC powder coat paint finish
- ETL listed for wet location

RELATIVE SCALE DRAWING



PHOTOMETRICS














800-788-VISA VisaLighting.com Page 1

OW2306 SCOPE (cont.)

Cast Body - Downlight (or Uplight) Only



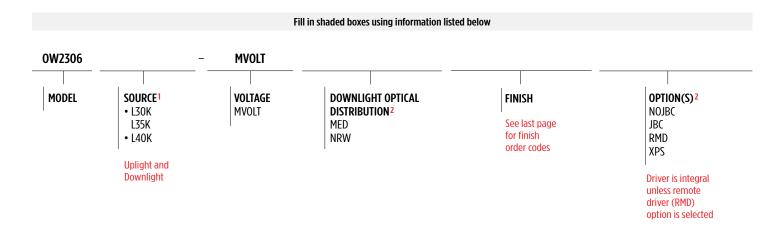

SOURCE1 (Select one)

Minimum 90CRI, within 3-step MacAdam Dimmable 0-10V to 10%

Source	ССТ	Delivered Lumens	Power/Watts
• L30K(H)	3000K		
L35K(H)	3500K	900	15
• L40K(L)	4000K		

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING 170 55,000hrs

OPTICAL DISTRIBUTION²

Uplight or Downlight only

Beam		Max Candela
MED	65° Beam	421
NRW	23° Beam	993


OPTIONS³ (Multiple Selections Allowed)

Integral driver unless Remote Driver (RMD) is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

NOJBC	Mounting plate used when not mounting over standard junction box
JBC	Junction box cover (4-1/2" square) for use with an existing 4" octagonal junction box. Painted to match finish
RMD	Remote mounted driver (required for mullion mount)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS


REMOTE DRIVER (RMD) INFORMATION



Maximum Recommended Remote Wiring Distance from **RMD** to fixture canopy

- 10GA 1400 ft
- 12GA 900 ft
- 14GA 550 ft
- 16GA 350 ft
- 18GA 200 ft

JUNCTION BOX COVER (JBC option) MOUNTING DETAIL



JBC option increases depth (D) by 1/4"

Remote driver boxes have knockouts for conduit connections

OW2306 SCOPE (cont.)

Cast Body – Downlight (or Uplight) Only



SCOPE PRODUCT FAMILY

• 0W2300	Cast Body - Downlight & Uplight
• 0W2302	Luminous Acrylic Body
• 0W2304	Acrylic Upper Body - Cast Lower Body w/ Downlight
• 0W2306	Cast Body - Downlight (or Uplight) Only
• 0W2308	Acrylic Upper Body - Cast Lower Body/No Downlight

See <u>Visalighting.com/Products/Scope</u> for more information

SUGGESTED VARIATION

- Custom finish colors
- · Colored diffusers
- Alternate beam angles
- Reduced lumen output

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

