

# OW2400 SASS™

## Rectilinear


[Visalighting.com/products/Sass](https://visalighting.com/products/Sass)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



### DIMENSIONS

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W	2-1/2"	(64 mm)
H	22"	(559 mm)
D	4"	(102 mm)


For mullion mounting, minimum required mullion width is 2-1/2"




### FEATURES

- Integral (unless RMD option is selected) high power factor electronic driver
- 90+ CRI
- IP65 rated
- Vertical or horizontal mounting
- Bracket mounting system simplifies installation and maintenance
- Surface mount to 2x4 junction box or window mullion. Mullion mount requires RMD option and minimum 2.5" mullion. Optional junction box cover (JBC) available for 4x4 junction box
- Tamper resistant fasteners
- Frosted 1/4" high impact grade acrylic (non-matte finish on end cap)
- No VOC powder coat paint finish
- ETL listed for wet location

### RELATIVE SCALE DRAWING

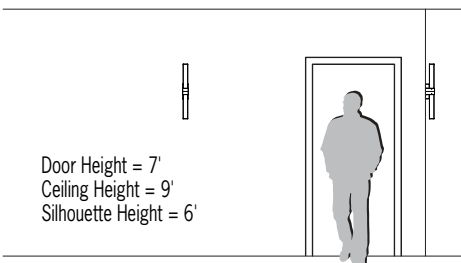

### PHOTOMETRICS

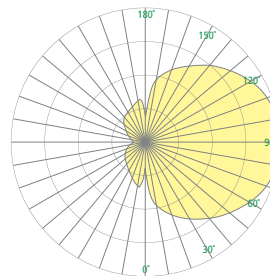

# OW2400 SASS (cont.)

## Rectilinear

Fill in shaded boxes using information listed below

OW2400	-	MVOLT		
MODEL	SOURCE <sup>1</sup>	VOLTAGE MVOLT	FINISH	OPTION(S) <sup>2</sup>
	<ul style="list-style-type: none"> <li>• L30K</li> <li>• L35K</li> <li>• L40K</li> </ul>		See last page for finish order codes	NOJBC JBC RMD XPS

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 90CRI, within 3-step MacAdam

SOURCE	CCT	Delivered Lumens	Power (Watts)
• L30K	3000K	520	13
L35K	3500K	520	13
• L40K	4000K	520	13


### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------


### OPTIONS<sup>2</sup> (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options


NOJBC	Mounting plate used when not mounting over standard junction box
JBC	Adaptor plate and decorative cover for 4x4 octagonal or square junction box. (When the JBC version is selected, the fixture depth is 4.25". The JBC version is not ADA.) Finish matches canopy and housing
RMD	Remote mounted power supply (required for mullion mount)
XPS	Express 10 day shipping. Items marked with a bullet (•) are not available with XPS



### REMOTE DRIVER (RMD OPTION) ENCLOSURE

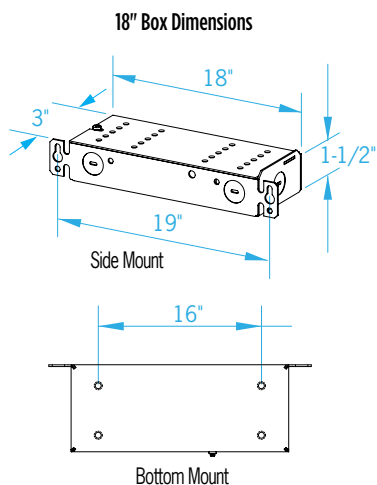

### JUNCTION BOX COVER (JBC OPTION) MOUNTING DETAIL

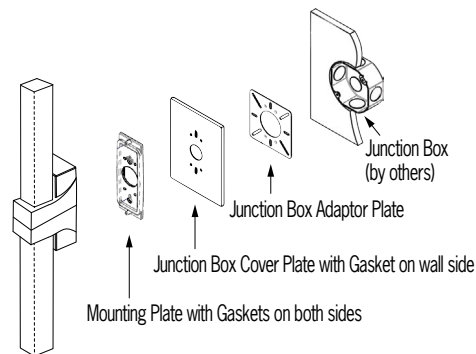

# OW2400 SASS (cont.)

## Rectilinear



### SASS PRODUCT FAMILY

- OW2400 - Rectilinear
- OW2402 - Cylindrical

See [Visalighting.com/products/Sass](https://visalighting.com/products/Sass) for more information

### SUGGESTED VARIATIONS

- 2700K
- Adaptive collar for column mounting

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

