

OW2480 PASSAGE™

Junction Box Mount with Integral Power Supply



[Visalighting.com/products/Passage](https://visalighting.com/products/Passage)

Type: _____ Project: _____ Location: _____




DIMENSIONS

Depth is measured from wall to front of fixture

L = Length H = Height D = Depth


L	37-1/4"	(946 mm)
H	2-1/2"	(64 mm)
D	2-1/2"	(64 mm)

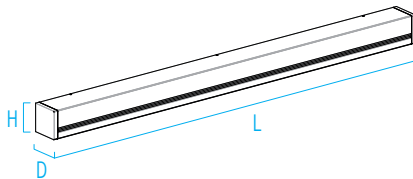

FEATURES


- High or low lumen output
- Luminous or Forward Throw output
- Modular design for replacement of LED source or driver
- Remote power supply included (suitable for indoor, Type IC)
- Optional dual circuit switching
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Window mullion mount; minimum mullion width 2.5"
- Tamper resistant fasteners
- Polycarbonate diffuser
- No VOC powder coat paint finish; metal based sublimated wood look finish
- ETL Listed for wet location mounting 4' above grade

RELATIVE SCALE DRAWING

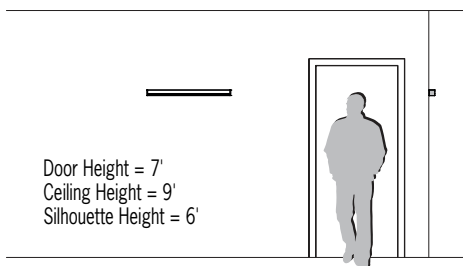


Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'

PHOTOMETRICS

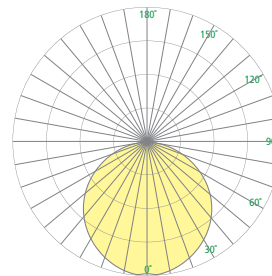

LUM (Luminous Lens)

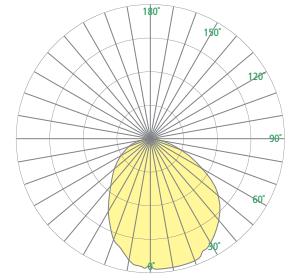

FT (Forward Throw Optic)



Compliant



IP65



ADA Compliant



ETL Listed



5 Year Warranty

OW2480 PASSAGE (cont.)

Mullion Mount with Remote Power Supply



Fill in shaded boxes using information listed below

OW2480			MVOLT			
MODEL	SOURCE ¹		VOLTAGE MVOLT	OPTIC ²	FINISH	OPTION ³
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)			LUM FT	See last page for finish order codes	DS

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 82CRI, within 3-step MacAdam

Source	CCT	Delivered Forward Throw Lumens	Delivered Luminous Lumens	Power (Watts)
L30K(H)	3000K	2700	1900	40
L30K(L)	3000K	900	650	14
L35K(H)	3500K	2700	1900	40
L35K(L)	3500K	900	650	14
L40K(H)	4000K	2700	1900	40
L40K(L)	4000K	900	650	14

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIC² (Select one)


LUM	Luminous Lens
FT	Forward Throw Optic

OPTION³

⚠ Option availability may be interdependent with Other Options


DS	Dual circuit switching (includes 2 drivers). Lumen output and wattage is split in half for each circuit
----	--

PATH OF EGRESS - LUMINOUS LENS

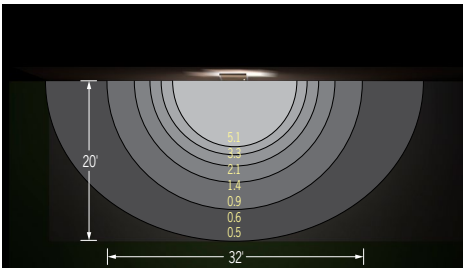


OW2480 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

PATH OF EGRESS - FORWARD THROW

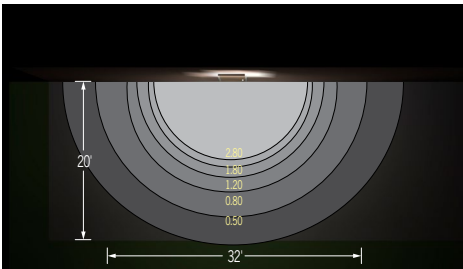


OW2480 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

REMOTE POWER SUPPLY ENCLOSURE

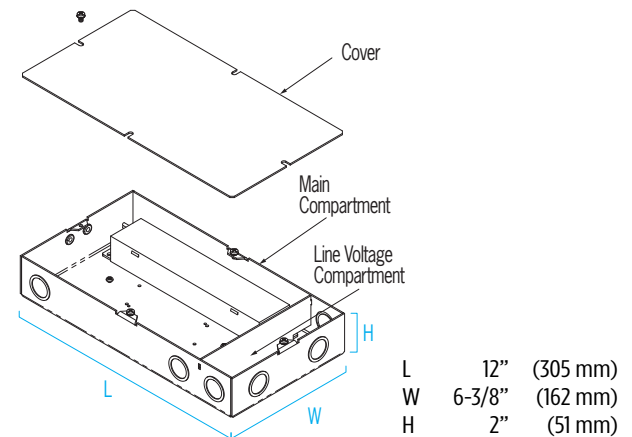

MULLION MOUNTING DETAIL

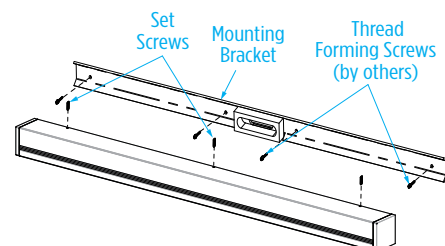

OW2480 PASSAGE (cont.)

Mullion Mount with Remote Power Supply



PASSAGE PRODUCT FAMILY

- OW2480 – 37” – Mullion Mount with Remote Power Supply
- OW2482 – 37” – Junction Box Mount with Integral Power Supply
- OW2484 – 72” – Mullion Mount with Remote Power Supply
- OW2486 – 72” – Junction Box Mount with Integral Power Supply

SUGGESTED VARIATIONS




- Custom colors

See [Visalighting.com/products/Passage](https://visalighting.com/products/Passage) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

