
OW2482 PASSAGE™

Junction Box Mount with Integral Power Supply



Visalighting.com/products/Passage

Type: Project: Location:

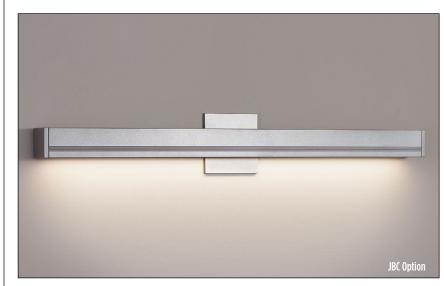




DIMENSIONS

Depth is measured from wall to front of fixture

L = Length H = Height D = Depth

L 37-1/4" (946 mm) H 2-1/2" (64 mm) D 2-3/4" (70 mm)




Use JBC4 option for 4x4 octagonal or rectilinear junction box


FEATURES


- High or low lumen output
- Luminous or Forward Throw output
- Modular design for replacement of LED source or driver
- Integral high power factor electronic power supply
- · Optional dual circuit switching
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Surface mount to horizontal 2x4 junction box. Optional junction box cover (JBC) available for 4x4 junction box
- Tamper resistant fasteners
- · Polycarbonate diffuser
- No VOC powder coat paint finish; metal based sublimated wood look finish
- ETL Listed for wet location mounting 4' above grade


RELATIVE SCALE DRAWING



PHOTOMETRICS







FT (Forward Throw Optic)











OW2482 PASSAGE (cont.)

Junction Box Mount with Integral Power Supply



Fill in shaded boxes using information listed below **0W2482 MVOLT** MODEL SOURCE1 **VOLTAGE** OPTIC² **FINISH** OPTION3 LUM L30K(H) MVOLT See last page NOJBC FT L30K(L) for finish L35K(H) JBC2 order codes L35K(L) JBC4 L40K(H) L40K(L)

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 82CRI, within 3-step MacAdam

Source	ССТ	Delivered Forward Throw Lumens	Delivered Luminous Lumens	Power (Watts)
L30K(H)	3000K	2700	1900	40
L30K(L)	3000K	900	650	14
L35K(H)	3500K	2700	1900	40
L35K(L)	3500K	900	650	14
L40K(H)	4000K	2700	1900	40
L40K(L)	4000K	900	650	14


VOLTAGE

MVOLT	120-277V, 50/60 Hz

OPTIC² (Select one)

LUM	Luminous Lens	
FT	Forward Throw Optic	

PATH OF EGRESS - LUMINOUS LENS



0W2482 - H Downlight, Mounted at 10' AFF, .70 light loss factor used

OPTION(S)³ (Multiple Selections Allowed)

A Option availability may be interdependent with Other Options


DS	Dual circuit switching (includes 2 drivers). Lumen output and wattage is split in half for each circuit
JBC4	Adaptor plate and decorative cover for 4x4 octagonal or square junction box. Finish matches canopy and housing

PATH OF EGRESS - FORWARD THROW



JUNCTION BOX COVER (JBC4 option) MOUNTING DETAIL

Backplate includes 5" wide x 6" high Junction Box Cover for 4x4 junction box



OW2482 PASSAGE (cont.) Junction Box Mount with Integral Power Supply



PASSAGE PRODUCT FAMILY

- OW2480 37" Mullion Mount with Remote Power Supply
- OW2482 37" Junction Box Mount with Integral Power Supply
- OW2484 72" Mullion Mount with Remote Power Supply
- OW2486 72" Junction Box Mount with Integral Power Supply

SUGGESTED VARIATIONS

Custom colors

See <u>Visalighting.com/products/Passage</u> for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

