

# OW2484 PASSAGE™

Mullion Mount with Remote Power Supply



[Visalighting.com/products/Passage](https://visalighting.com/products/Passage)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_




## DIMENSIONS

Depth is measured from wall to front of fixture

L = Length H = Height D = Depth


L 72" (1829 mm)  
H 2-1/2" (64 mm)  
D 2-1/2" (64 mm)

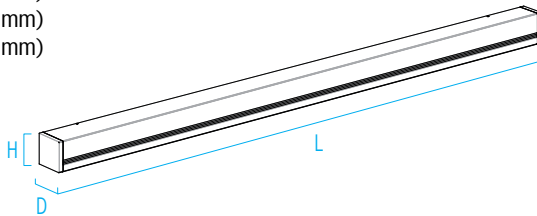

## FEATURES


- High or low lumen output
- Luminous or Forward Throw output
- Modular design for replacement of LED source or driver
- Remote power supply included (suitable for indoor, Type IC)
- Optional dual circuit switching
- IP65 rated
- Bracket mounting system simplifies installation and maintenance
- Window mullion mount; minimum mullion width 2.5"
- Tamper resistant fasteners
- Polycarbonate diffuser
- No VOC powder coat paint finish; metal based sublimated wood look finish
- ETL Listed for wet location mounting 4' above grade

## RELATIVE SCALE DRAWING

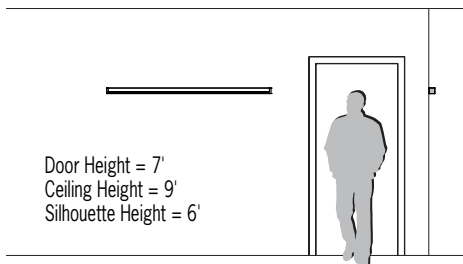


Door Height = 7'  
Ceiling Height = 9'  
Silhouette Height = 6'

## PHOTOMETRICS

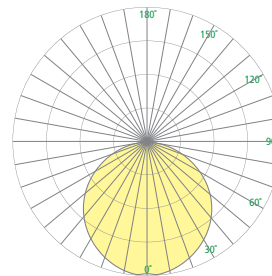

LUM (Luminous Lens)

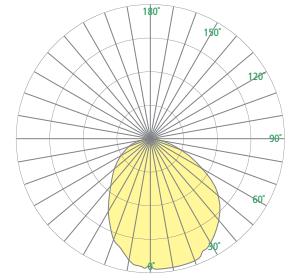

FT (Forward Throw Optic)



Compliant



IP65



ADA Compliant



ETL Listed



5 Year Warranty

# OW2484 PASSAGE (cont.)

## Mullion Mount with Remote Power Supply



Fill in shaded boxes using information listed below

OW2484			MVOLT			
MODEL	SOURCE <sup>1</sup>		VOLTAGE MVOLT	OPTIC <sup>2</sup>	FINISH	OPTION <sup>3</sup>
	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)			LUM FT	See last page for finish order codes	DS

SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 82CRI, within 3-step MacAdam

Source	CCT	Delivered Forward Throw Lumens	Delivered Luminous Lumens	Power (Watts)
L30K(H)	3000K	4100	2900	60
L30K(L)	3000K	1800	1300	27
L35K(H)	3500K	4100	2900	60
L35K(L)	3500K	1800	1300	27
L40K(H)	4000K	4100	2900	60
L40K(L)	4000K	1800	1300	27

## VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

OPTIC<sup>2</sup> (Select one)


LUM	Luminous Lens
FT	Forward Throw Optic

OPTION<sup>3</sup>

⚠ Option availability may be interdependent with Other Options


DS	Dual circuit switching (includes 2 drivers). Lumen output and wattage is split in half for each circuit
----	--

## PATH OF EGRESS - LUMINOUS LENS

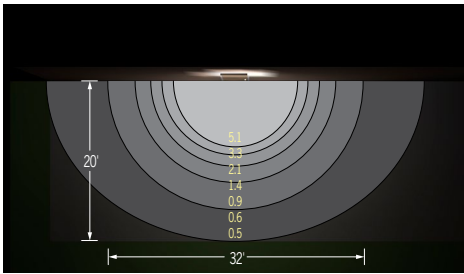


OW2484 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

## PATH OF EGRESS - FORWARD THROW

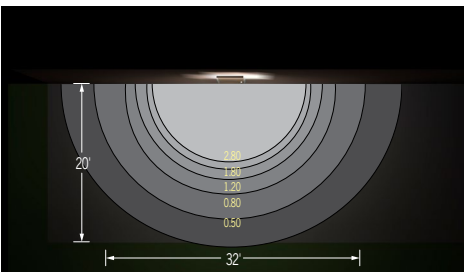


OW2484 -H Downlight, Mounted at 10' AFF, .70 light loss factor used

## REMOTE POWER SUPPLY ENCLOSURE

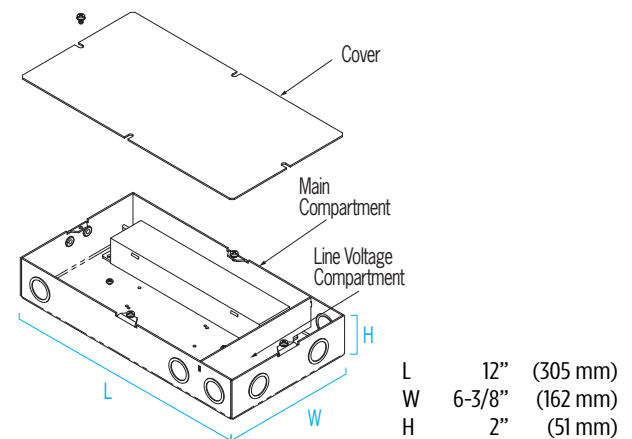

## MULLION MOUNTING DETAIL

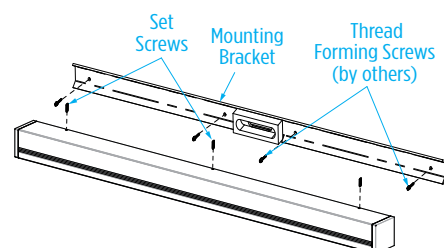

# OW2484 PASSAGE (cont.)

## Mullion Mount with Remote Power Supply



### PASSAGE PRODUCT FAMILY

- OW2480 – 37” – Mullion Mount with Remote Power Supply
- OW2482 – 37” – Junction Box Mount with Integral Power Supply
- OW2484 – 72” – Mullion Mount with Remote Power Supply
- OW2486 – 72” – Junction Box Mount with Integral Power Supply

### SUGGESTED VARIATIONS

- Custom colors

See [Visalighting.com/products/Passage](https://visalighting.com/products/Passage) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue	<b>DEOR</b> Deoro Gold
<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey	<b>SBGN</b> Sagebrush Green
<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red	

