

SW7070 LIBERTY™

US Patent pending



Behavioral Health/High Abuse Momentary Switches

VisaLighting.com/products/Liberty

Type: _____ Project: _____ Location: _____




DIMENSIONS

H = Height W = Width D = Depth

	Single Gang	Dual Gang	Triple Gang
H	5-3/8" (137 mm)	5-3/8" (137 mm)	5-3/8" (137 mm)
W	3-5/8" (92 mm)	5-7/16" (138 mm)	7-1/4" (184 mm)
D	0.25" (6 mm)	0.25" (6 mm)	0.25" (6 mm)

FEATURES

- High-abuse resistant construction
- Room-side sealed construction
- Ligature-resistant design
- Stainless steel switch body and actuator
- Momentary switch function (normally OFF)
- Switch is closed as long as the button is held down
- Switches rated for max 0.1A, 24VDC
- Can be combined with LVPC-DIM accessory to control multiple zones with optional lockout & override functions (see application design guide)
- Can be used with any control system with momentary-contact control inputs
- Tamper-resistant stainless steel fasteners
- IP65 ingress protection (if installed per instructions)
- IK10+ impact resistant
- Class 2 circuits only, not approved for Class 1 or power circuits
- Switches recessed into wall plates for enhanced resistance to tampering
- Easy to clean
- Installs into single-, dual-, or three-gang recessed switch boxes (by others) using provided screws
- Single piece machined aluminum wall plate
- ETL listed
- No-VOC powder coat finishes
- Antimicrobial clear coat standard

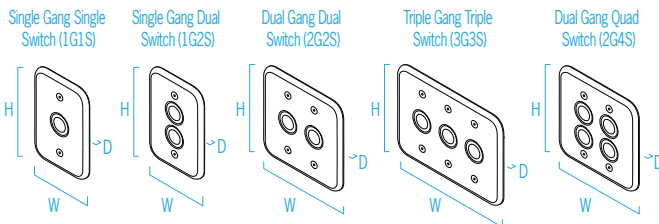

Electrical box interior depth (including plaster ring, if present) must be at least 2-1/4"

RELATIVE SCALE DRAWING

Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'



IK10+



IP65 Rated



ETL Listed



5 Year Warranty

SW7070 LIBERTY (cont.)

Behavioral Health/High Abuse Momentary Switches



Fill in shaded boxes using information listed below

SW7070

MODEL

SIZE/SWITCH OPTION¹

1G1S
1G2S
2G2S
2G4S
3G3S

FINISH

See below for finish order codes


Antimicrobial clear coat standard

SIZE/SWITCH OPTIONS¹ (Select one)

1G1S	Single gang, single switch
1G2S	Single gang, dual switch
2G2S	Dual gang, dual switch
2G4S	Dual gang, quad switch
3G3S	Triple gang, triple switch

BASIC CIRCUIT DIAGRAM (All switches)

All switches have independent connections



Each switch is provided with 6.5" 20AWG wire

Switches rated for 24VDC max, 100mA max
Switch is CLOSED as long as the button is held down

SUGGESTED VARIATIONS

- Illuminated switch rings
- Custom markings on plates (icons, text, etc.)

See [VisaLighting.com/products/Liberty](https://visalighting.com/products/Liberty) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White *	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black *	VNRD Vineyard Red	

*Anti-microbial coating on GLWT and VBLK changes finish texture. Please contact factory

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.