


# CP7120 ZUME™ IN

Indoor Luminous Globe



[VisaLighting.com/products/Zume-In](https://VisaLighting.com/products/Zume-In)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

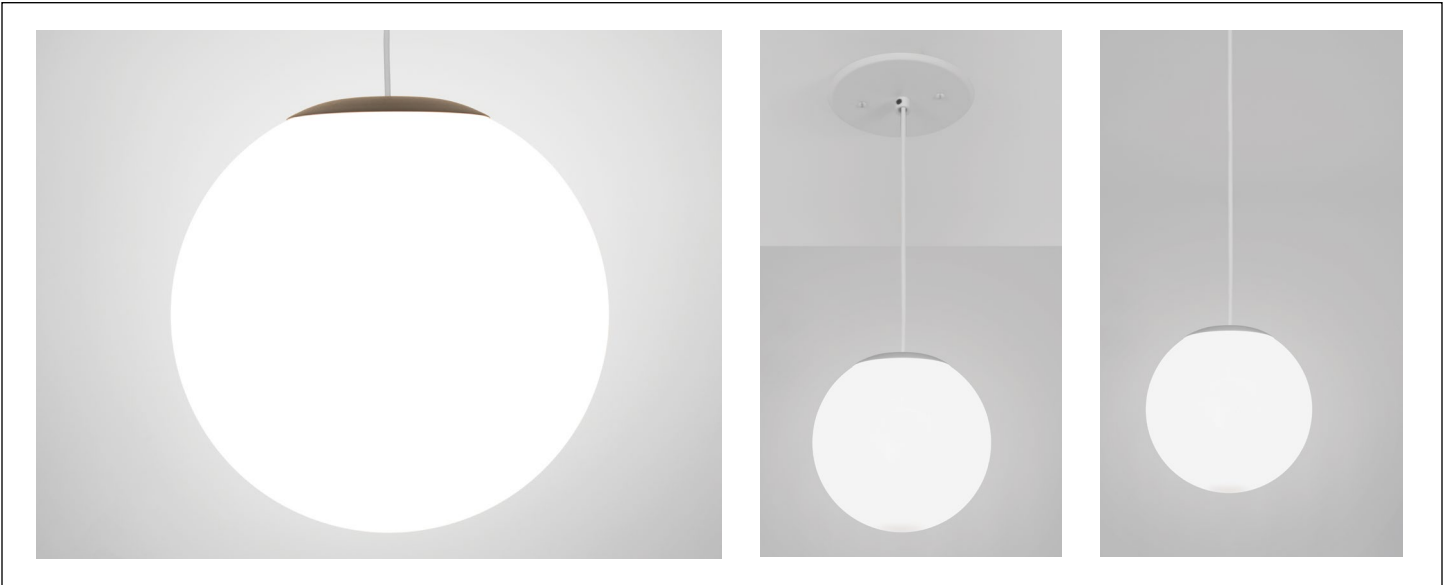


## DIMENSIONS <sup>1,6</sup>

**OAH MUST BE SPECIFIED**

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane


DIA = Diameter OAH = Standard Overall Height WT=Weight

| CP7120- | 6              | 8              | 12             | 16             | 22             |
|---------|----------------|----------------|----------------|----------------|----------------|
| DIA     | 6" (152 mm)    | 8" (203 mm)    | 12" (305 mm)   | 16" (406 mm)   | 22" (559 mm)   |
| MIN OAH | 14" (356 mm)   | 16" (406 mm)   | 20" (508 mm)   | 24" (610 mm)   | 30" (762 mm)   |
| STD OAH | 48" (1219 mm)  | 48" (1219 mm)  | 48" (1219 mm)  | 48" (1219 mm)  | 48" (1219 mm)  |
| MAX OAH | 192" (4877 mm) | 192" (4877 mm) | 192" (4877 mm) | 192" (4877 mm) | 192" (4877 mm) |
| WT      | 4 lbs          | 4 lbs          | 5 lbs          | 6 lbs          | 10 lbs         |

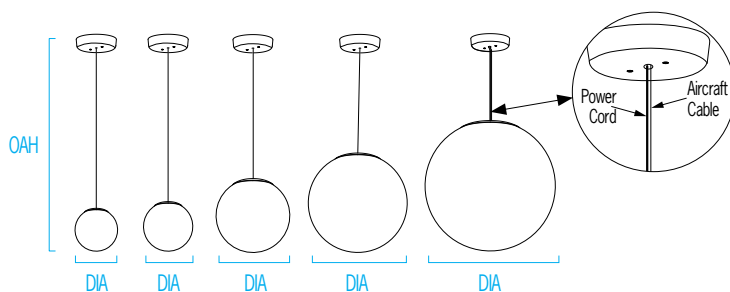

CP7120-6 CP7120-8 CP7120-12 CP7120-16 CP7120-22


## RELATIVE SCALE DRAWING

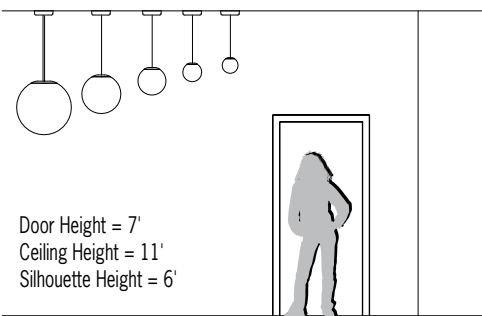

## FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Consistent luminance across all sizes
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5-1/4" diameter and 1/2" deep
- Driver in canopy (SDC) includes round canopy 6-3/8" diameter and 1-1/2" deep
- Canopy mounts over 4x4 junction box (by others) with provided hardware and is painted white
- One piece gloss white acrylic globe for seamless appearance
- Suspended by 2-conductor white power cord (8", 12" and 16"); 22" suspended by aircraft cable
- Non-VOC powder coat finishes or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

## PHOTOMETRICS

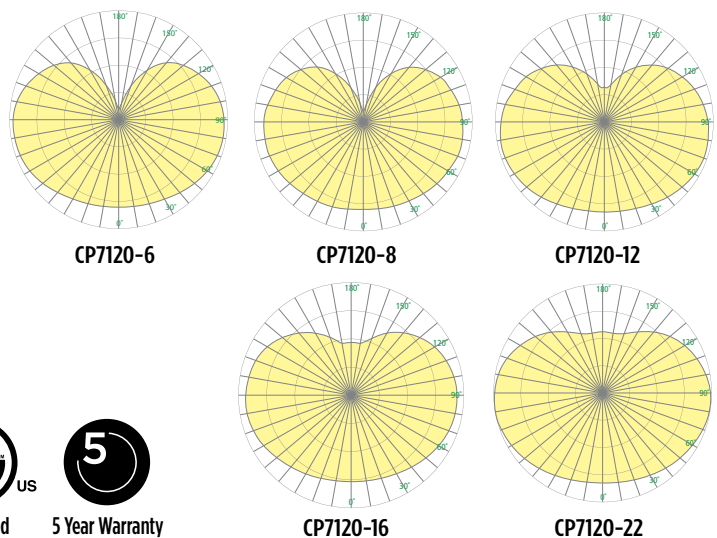

# CP7120 ZUME IN (cont.)

## Indoor Luminous Globe



Fill in shaded boxes using information listed below

| CP7120     |                               |                      | - MVOLT                                                                |                  |                                            |                     |                     |                  |
|------------|-------------------------------|----------------------|------------------------------------------------------------------------|------------------|--------------------------------------------|---------------------|---------------------|------------------|
| MODEL      | DIAMETER <sup>1</sup>         | SOURCE <sup>2</sup>  | SOURCE OPTION <sup>3</sup>                                             | VOLTAGE<br>MVOLT | CAP FINISH                                 | DRIVER <sup>4</sup> | OPTION <sup>5</sup> | OAH <sup>6</sup> |
|            | 6"<br>8"<br>12"<br>16"<br>22" | L30K<br>L35K<br>L40K | 90CRI<br><br>Minimum 80CRI is<br>standard if option<br>is not selected |                  | See last page<br>for finish<br>order codes | RMD<br>SDC          | DCC                 | See page 1       |
| See page 1 |                               |                      |                                                                        |                  |                                            |                     |                     |                  |

### SOURCE<sup>2</sup> (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

| Bodylight Source | Delivered Lumens |          |           |           |           |
|------------------|------------------|----------|-----------|-----------|-----------|
|                  | CP7120-6         | CP7120-8 | CP7120-12 | CP7120-16 | CP7120-22 |
| L30K             | 750              | 1050     | 2300      | 3500      | 5900      |
| L35K             | 775              | 1100     | 2400      | 3600      | 6100      |
| L40K             | 800              | 1150     | 2400      | 3800      | 6300      |
| Power (Watts)    | 6                | 8        | 17        | 30        | 47        |

### VOLTAGE

| MVOLT | 120-277V, 50/60 Hz |
|-------|--------------------|
|-------|--------------------|

### LUMEN MAINTENANCE RATING

| L70 (reported) | >55,000 hrs |
|----------------|-------------|
|----------------|-------------|

### SOURCE OPTION<sup>3</sup>


Minimum 80CRI within 3-step MacAdam is standard if option is not selected

| 90CRI | Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 15%) |
|-------|--------------------------------------------------------------------------------------------|
|-------|--------------------------------------------------------------------------------------------|

### DRIVER<sup>4</sup> (Select one)

⚠ Availability may be interdependent with Voltage, Source or Other Options

| SDC | Surface canopy with integral driver; canopy is painted white                                                                                                                     |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RMD | Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white. See page 3 for more information |

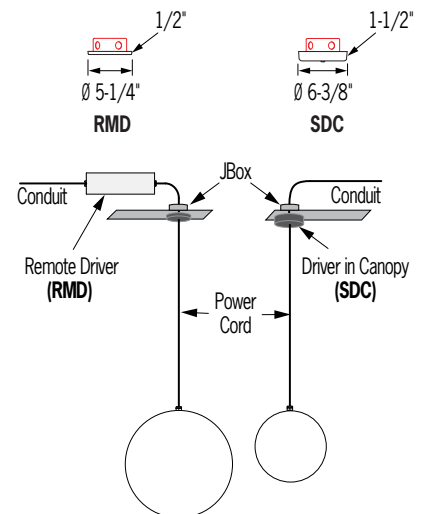


Options continued on Page 3

# CP7120 ZUME IN (cont.)

## Indoor Luminous Globe

### REMOTE DRIVER (RMD) INFORMATION

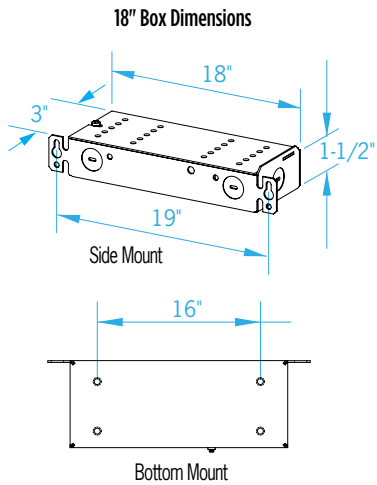

| Model     | Maximum Recommended Remote Wiring Distance from RMD to fixture canopy |       |       |       |
|-----------|-----------------------------------------------------------------------|-------|-------|-------|
|           | 12AWG                                                                 | 14AWG | 16AWG | 18AWG |
| CP7120-6  | 2000                                                                  | 1250  | 750   | 500   |
| CP7120-8  | 1425                                                                  | 900   | 550   | 325   |
| CP7120-12 | 550                                                                   | 350   | 225   | 125   |
| CP7120-16 | 250                                                                   | 150   | 100   | 50    |
| CP7120-22 | 100                                                                   | 50    | 25    | 25    |

All distances in feet

Remote driver boxes have knockouts for conduit connections

### OPTION<sup>5</sup>

⚠ Option availability may be interdependent with Other Options

|     |                                                                                               |
|-----|-----------------------------------------------------------------------------------------------|
| DCC | Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations) |
|-----|-----------------------------------------------------------------------------------------------|

# CP7120 ZUME IN (cont.)

## Indoor Luminous Globe



### ZUME PRODUCT FAMILY

| Indoor   | White LED                                                                                                                  |                                                                                                                                             | RGBW                                                                                                                                        |                                                                                                                                                   |
|----------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Zume In  | <ul style="list-style-type: none"> <li>• CP7120-6</li> <li>• CP7120-8</li> <li>• CP7120-12</li> <li>• CP7120-16</li> </ul> | Cord Suspension                                                                                                                             | <ul style="list-style-type: none"> <li>• CP7126-8</li> <li>• CP7126-12</li> <li>• CP7126-16</li> <li>• CP7126-22</li> </ul>                 | Stem                                                                                                                                              |
|          | <ul style="list-style-type: none"> <li>• CP7120-22</li> </ul>                                                              | Cord & Cable Suspension                                                                                                                     |                                                                                                                                             |                                                                                                                                                   |
| Zume DL  | <ul style="list-style-type: none"> <li>• CP7122-12</li> <li>• CP7122-16</li> <li>• CP7122-22</li> </ul>                    | Cord & Cable Suspension                                                                                                                     | <ul style="list-style-type: none"> <li>• CP7128-8</li> <li>• CP7128-12</li> <li>• CP7128-16</li> <li>• CP7128-22</li> </ul>                 | Stem                                                                                                                                              |
| Outdoor  |                                                                                                                            |                                                                                                                                             |                                                                                                                                             |                                                                                                                                                   |
| Zume Out | Cord & Cable Suspension                                                                                                    | <ul style="list-style-type: none"> <li>• OP2120-ShortCap — 12"</li> <li>• OP2130-ShortCap — 16"</li> <li>• OP2140-ShortCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2120-SolidCap — 12"</li> <li>• OP2130-SolidCap — 16"</li> <li>• OP2140-SolidCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2120-SlottedCap — 12"</li> <li>• OP2130-SlottedCap — 16"</li> <li>• OP2140-SlottedCap — 20"</li> </ul> |
|          | Catenary Suspension                                                                                                        | <ul style="list-style-type: none"> <li>• OP2122-ShortCap — 12"</li> <li>• OP2132-ShortCap — 16"</li> <li>• OP2142-ShortCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2122-SolidCap — 12"</li> <li>• OP2132-SolidCap — 16"</li> <li>• OP2142-SolidCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2122-SlottedCap — 12"</li> <li>• OP2132-SlottedCap — 16"</li> <li>• OP2142-SlottedCap — 20"</li> </ul> |
|          | Stem Suspension                                                                                                            | <ul style="list-style-type: none"> <li>• OP2124-ShortCap — 12"</li> <li>• OP2134-ShortCap — 16"</li> <li>• OP2144-ShortCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2124-SolidCap — 12"</li> <li>• OP2134-SolidCap — 16"</li> <li>• OP2144-SolidCap — 20"</li> </ul> | <ul style="list-style-type: none"> <li>• OP2124-SlottedCap — 12"</li> <li>• OP2134-SlottedCap — 16"</li> <li>• OP2144-SlottedCap — 20"</li> </ul> |

See [Visalighting.com/families/zume](https://visalighting.com/families/zume) for more information

### SUGGESTED VARIATION

- Recommend Model CP7122 with custom cover plate over downlight opening for CCT consistency in spaces requiring combinations of globes with and without downlight

# CP7120 ZUME IN (cont.)

## Indoor Luminous Globe



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

|                           |                             |                               |                           |                          |                            |                             |
|---------------------------|-----------------------------|-------------------------------|---------------------------|--------------------------|----------------------------|-----------------------------|
|                           |                             |                               |                           |                          |                            |                             |
| <b>AGGY</b> Agate Grey    | <b>ALGN</b> Alpine Green    | <b>BMAT</b> Bronze Matte      | <b>BRNZ</b> Bronze        | <b>BSIL</b> Blade Silver | <b>CVBL</b> Cove Blue      | <b>DEOR</b> Deoro Gold      |
|                           |                             |                               |                           |                          |                            |                             |
| <b>GLWT</b> Glacier White | <b>GSIL</b> Graphite Silver | <b>HRGR</b> Harbor Grey       | <b>JTBK</b> Jet Black     | <b>OCBL</b> Ocean Blue   | <b>SHGR</b> Shoreline Grey | <b>SBGN</b> Sagebrush Green |
|                           |                             |                               |                           |                          |                            |                             |
| <b>SLGR</b> Slate Grey    | <b>SSTP</b> Sierra Taupe    | <b>TRCN</b> Terracotta Canyon | <b>TRWT</b> Traffic White | <b>VBLK</b> Velvet Black | <b>VNRD</b> Vineyard Red   |                             |

#### Alternative Metal Finishes (Premium)

|                                          |                                       |                                       |                                       |
|------------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
|                                          |                                       |                                       |                                       |
| <b>BBA</b> Brushed Brass Alternative     | <b>BCA</b> Brushed Chrome Alternative | <b>BUA</b> Brushed Copper Alternative | <b>BZA</b> Brushed Bronze Alternative |
|                                          |                                       |                                       |                                       |
| <b>OBA</b> Oil-Rubbed Bronze Alternative | <b>PRA</b> Pewter Alternative         | <b>RBA</b> Rustic Brass Alternative   | <b>SNA</b> Satin Nickel Alternative   |

#### Metal Finish (Premium)

|                            |
|----------------------------|
|                            |
| <b>BA</b> Brushed Aluminum |

