


CP7128 ZUME™ IN DL

Indoor Luminous Globe with RGBW Bodylight
and White Downlight



VisaLighting.com/products/Zume-DL

Type: _____ Project: _____ Location: _____

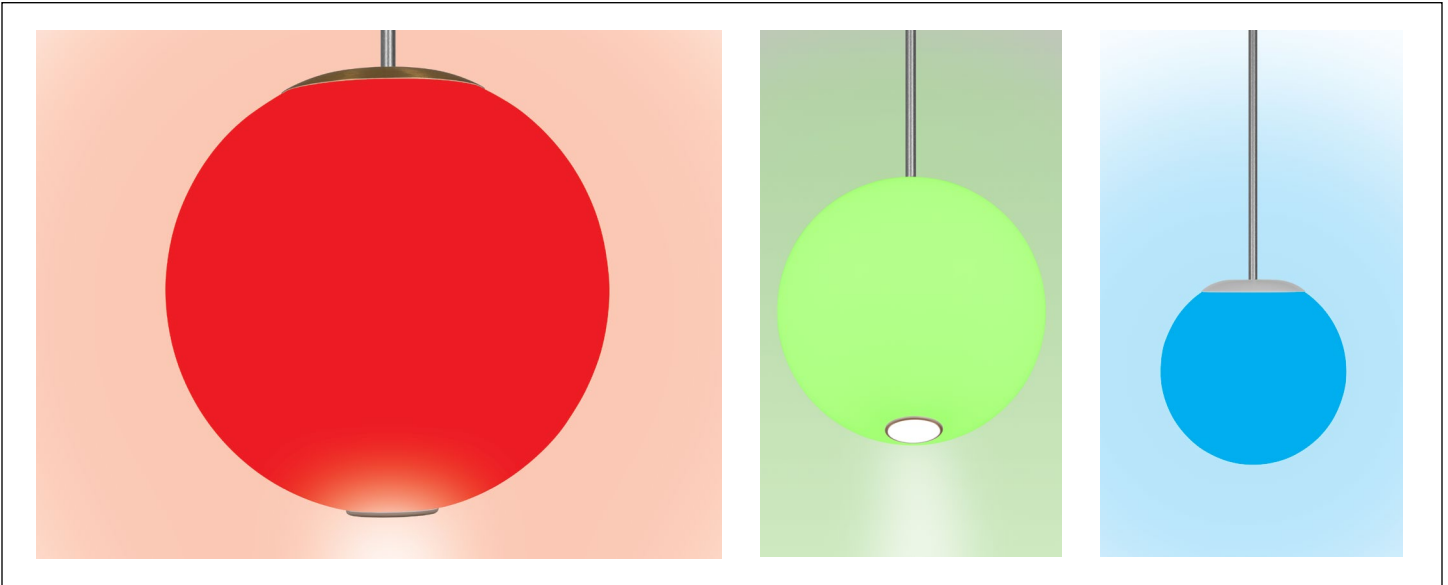


DIMENSIONS^{1,6}

OAH MUST BE SPECIFIED


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane.

DIA = Diameter OAH = Standard Overall Height WT=Weight

CP7128-	12	16	22
DIA	12" (305 mm)	16" (406 mm)	22" (559 mm)
MIN OAH	20" (508 mm)	24" (610 mm)	30" (762 mm)
STD OAH	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)
MAX OAH	192" (4877 mm)	192" (4877 mm)	192" (4877 mm)
WT	12 lbs	13 lbs	16 lbs

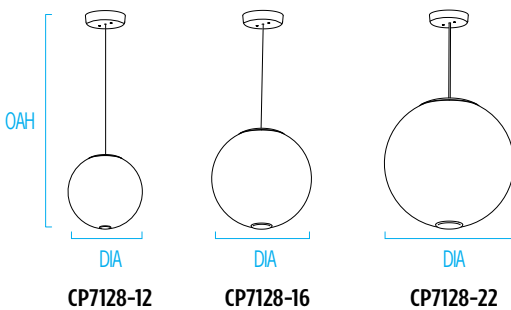


RELATIVE SCALE DRAWING

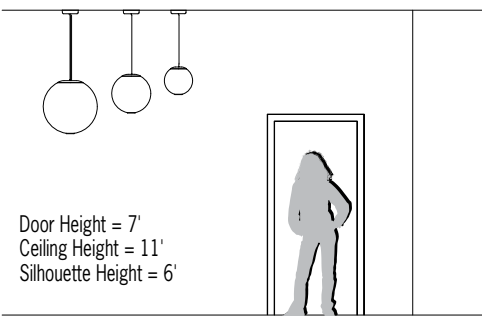

FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Downlight, 0-10V dimmable (controls by others), with optional narrow, medium, or wide optical distribution
- Remote driver (RMD) standard, suitable for insulation contact (Type IC)
- Includes round canopy 5-1/4" diameter and 1/2" deep
- Suspended by 5/8" diameter stem
- Canopy mounts over 4" octagonal junction box (by others) with provided hardware. Canopy finished to match cap, stem and bezel
- One piece gloss white acrylic globe for seamless appearance
- Optional DMX control for downlight
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suited for exterior application

SPHERE PHOTOMETRICS

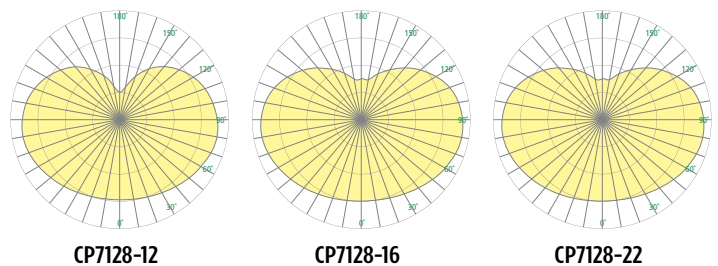

Compliant



ETL Listed



5 Year Warranty

CP7128 ZUME™ IN DL (cont.)

Indoor Luminous Globe with RGBW Bodylight and White Downlight



Fill in shaded boxes using information listed below

CP7128		RGBW			- MVOLT				
MODEL	DIAMETER ¹ 12" 16" 22"	BODYLIGHT SOURCE RGBW	DOWNLIGHT ² SOURCE L30K L35K L40K	DOWNLIGHT ³ OUTPUT LOW (L) MED (M) HIGH (H)	VOLTAGE MVOLT	DOWNLIGHT ⁴ OPTIC NRW MED WIDE	CAP, STEM AND CANOPY FINISH See last page for finish order codes	OPTION ⁵ DMX	OAH ⁶ See page 1
See page 1									

See page 1

BODYLIGHT SOURCE

Channel(s)	Delivered Lumens		
	CP7128-12	CP7128-16	CP7128-22
Red Only	130	195	245
Green Only	335	500	625
Blue Only	60	90	115
3000K Only (80CRI min)	430	640	805
All ON	885	1315	1645
Power (Watts)	20	28	38

LUMEN MAINTENANCE RATING

L85	> 55,000 HRS
-----	--------------

DOWNLIGHT² (Select one)

DOWNLIGHT SOURCE	CCT
L30K	3000K
L35K	3500K
L40K	4000K



DOWNLIGHT OUTPUT³ (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam


Option	Delivered Lumens		POWER (WATTS)
	L30K/L35K	L40K	
LOW	860	875	6
MED	1400	1425	10
HIGH	2000	2040	15

Downlight Optic ⁴	
NRW	27° Beam
MED	41° Beam
WIDE	52° Beam


DOWNLIGHT APERTURE & LIP



CP7128-NRW



CP7128-MED



CP7128-WIDE

MAX REMOTE DISTANCE PER FIXTURE

WIRE AWG	Maximum Distance (Ft)		
	CP7128-12	CP7128-16	CP7128-22
12	100	100	100
14	100	100	100
16	100	75	50
18	75	50	40

All distances in feet

OPTION⁵ (Select one)

DMX	DMX control of downlight
-----	--------------------------


CP7128 ZUME™ IN DL (cont.)

Indoor Luminous Globe with RGBW Bodylight and White Downlight




REMOTE DRIVER (RMD) INFORMATION

18" Box Dimensions

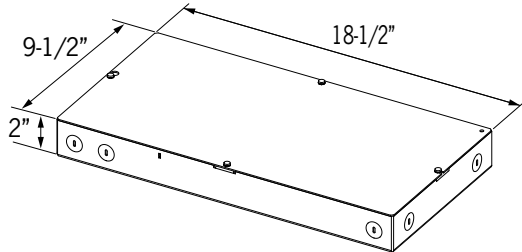

Remote driver boxes have knockouts for conduit connections

****Remote driver with DMX decoder is included with each fixture. DMX controllers are supplied by others. Multiple fixtures can be powered by one remote driver. Please contact factory to help configure any unique installation.**

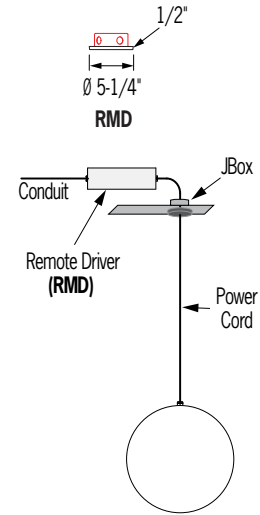

DMX SETTINGS AND MAXIMUM LUMEN OUTPUTS FOR VARIOUS COLORS

Color	8-Bit DMX values				Max Lumens		
	R	G	B	W	CP7128-12	CP7128-16	CP7128-22
Red	255	0	0	0	133	197	247
Green	0	255	0	0	337	500	626
Blue	0	0	0	255	62	92	115
2700K	52	0	3	255	461	684	857
3000K	0	0	0	255	434	644	808
3500K	7	21	25	255	470	697	873
4000K	15	61	34	255	532	789	989
5000K	22	100	79	255	594	881	1104
6500K	8	87	138	255	585	868	1088

CP7128 ZUME™ IN DL (cont.)

Indoor Luminous Globe with RGBW Bodylight
and White Downlight



ZUME PRODUCT FAMILY

Indoor	White LED		RGBW	
Zume In	• CP7120-8 • CP7120-12 • CP7120-16	Cord Suspension	• CP7126-8 • CP7126-12 • CP7126-16	Stem
	• CP7120-22	Cord & Cable Suspension	• CP7126-22	
Zume DL	• CP7122-12 • CP7122-16 • CP7122-22	Cord & Cable Suspension	• CP7128-12 • CP7128-16 • CP7128-22	Stem
Outdoor				
Zume Out	Cord & Cable Suspension	• OP2120-ShortCap — 12" • OP2130-ShortCap — 16" • OP2140-ShortCap — 20"	• OP2120-SolidCap — 12" • OP2130-SolidCap — 16" • OP2140-SolidCap — 20"	• OP2120-SlottedCap — 12" • OP2130-SlottedCap — 16" • OP2140-SlottedCap — 20"
	Catenary Suspension	• OP2122-ShortCap — 12" • OP2132-ShortCap — 16" • OP2142-ShortCap — 20"	• OP2122-SolidCap — 12" • OP2132-SolidCap — 16" • OP2142-SolidCap — 20"	• OP2122-SlottedCap — 12" • OP2132-SlottedCap — 16" • OP2142-SlottedCap — 20"
	Stem Suspension	• OP2124-ShortCap — 12" • OP2134-ShortCap — 16" • OP2144-ShortCap — 20"	• OP2124-SolidCap — 12" • OP2134-SolidCap — 16" • OP2144-SolidCap — 20"	• OP2124-SlottedCap — 12" • OP2134-SlottedCap — 16" • OP2144-SlottedCap — 20"

See [Visalighting.com/families/zume](https://visalighting.com/families/zume) for more information

CP7128 ZUME™ IN DL (cont.)

Indoor Luminous Globe with RGBW Bodylight and White Downlight



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum

