CP6000 Sequence™ Mini

Vertical Suspension



VisaLighting.com/products/Sequence-Mini

Type: Project: Location:







DIMENSIONS¹⁰ OAH MUST BE SPECIFIED

DIA = Diameter OAH = Overall Height X = Body Length


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"

DIA 2-1/4" (57 mm)
OAH 96" (2438 mm)
MIN OAH X + 3" (X + 76 mm)
X 12" - 72" (305 mm - 1829 mm)
WT 1 lb - 6 lbs (454 g - 2722 g)

OAH X Recessed DIA Downlight

WT = Weight

RELATIVE SCALE DRAWING














FEATURES

- Varying lengths, from 12" to 72", in 6" increments
- Optional downlight, 0-10V dimmable (controls by others), with narrow, medium, or wide optical distribution
- Endcaps machined from raw 2.25"DIA Aluminum billet
- Remote Driver Enclosure (**RMD**) is available for all lengths. Round canopy is 5-1/4" diameter and 1/2" deep.
- Driver in canopy (**SDC**) is available for lengths 24" and longer. Round canopy is 6-3/8" diameter and 1-1/2" deep.
- Canopy for both (RMD) or (SDC) mounts over octagonal junction box (by others) with provided hardware and is painted white
- Suspended via black, white, or gray power cord. Overall height (OAH) can be field adjusted to a shorter length during installation
- Matte white acrylic body
- No VOC powder coat finish or low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS







Downlight Optic NRW 27° Beam




Downlight Optic MED 33° Beam

Downlight Optic WIDE 48° Beam

800-788-VISA

Vertical Suspension



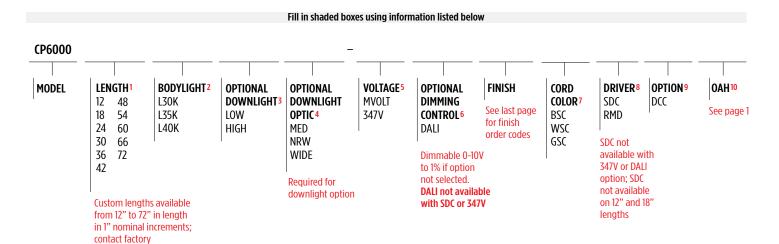

BODYLIGHT SOURCE (Select one length and one source?)

Minimum 80CRI, within 3-step MacAdam

Bodylight Source ²	L30K	L35K	L40K	
ССТ	3000K	3500K	4000K	Power (Watts) (Body)
Length ¹	Delivered Lumens (Body)			Dody
12"	650	700	700	7
18"	1000	1100	1100	10
24"	1400	1500	1600	14
30"	1800	1900	2000	17
36"	2200	2300	2500	21
42"	2600	2800	2900	24
48"	3000	3200	3300	28
54"	3400	3600	3800	31
60"	3800	4000	4200	35
66"	4200	4500	4700	39
72"	4600	4900	5100	42

LUMEN MAINTENANCE RATING

	Bodylight	L80 (reported)	>72,000 hrs
Downlight		L80 (reported)	>55,000 hrs


Bodylight and downlight are separately switched and controlled/dimmed

OPTIONAL DOWNLIGHT³ AND OPTIC⁴

Fixture bottom is solid if no downlight is specified. Downlight adds an extra 1" to overall length. CCT matches bodylight selection Minimum 80CRI, within 3-stem MacAdam

	Delivered	d Lumens	Dower (Matts)	
	L30K/L35K	L40K	Power (Watts)	
LOW	800	850	8	
HIGH	1500	1600	17	

Downlight Optic			
NRW 27° Beam			
MED	33° Beam		
WIDE	48º Beam		



Downlight

DIMENSIONS WITH DOWNLIGHT

CP6000 - 24" EXAMPLE

Downlight adds an extra 1" to overall height (OAH)

No Downlight

VOLTAGE⁵ (Select one)

MVOLT	120-277V, 50/60 Hz
347V	50/60 Hz Not available with DALI or SDC options

Options continued on Page 3

Vertical Suspension



DIMMING CONTROL OPTION⁶

0-10V dimming to 1% is included unless DALI option is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI

Dimming control capability (to 5%) via DALI 1.0 protocol (not available with 347V or SDC option)

CORD COLOR7 (Select one)

BSC	Black power cord
WSC	White power cord
GSC	Gray power cord

Bottom Mount

DRIVER⁸ (Select one) DRIVER DETAIL Availability may be interdependent with Voltage, Source or Other Options Remote Driver (RMD) Surface Canopy with Integral Driver (SDC) SDC Surface canopy with integral driver; canopy is painted white (not available 1-1/2" with 347V or DALI option; not available on 12" and 18" lengths) RMD Remote driver enclosure, has knockouts for conduit connection, may be recess Ø 5-1/4' Ø 6-3/8 mounted with insulation contact (type IC); canopy is painted white **RMD** SDC Conduit Conduit REMOTE DRIVER (RMD) INFORMATION Remote Driver Driver in Canopy 8" RMD box is used for 24" to 72" lengths 18" **RMD** box is used for any of these lengths: (RMD) (SDC) 12" & 18" lengths, DALI dimming, 347V Power 8" Box Dimensions Cord Surface Driver Canopy (SDC) available only for 24" and longer Side Mount 19" Side Mount 16"

Remote driver boxes have knockouts for conduit connections

Vertical Suspension



OPTION9

A Option availability may be interdependent with Other Options

DCC

Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)

Maximum Recommended Remote Wiring Distance from **RMD** to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft

SEQUENCE PRODUCT FAMILY

Wall Units	• CB5201 — 34 In Indoor Wall		• OP2252 — 8 In x 2 Ft Canopy
	• CB5203 — 45 In Indoor Wall		• OP2253 — 8 In x 3 Ft Canopy
4" Diameter	• CP2020 — 4 In x 2 Ft	Outdoor 8" Diameter Pendants	• OP2254 — 8 In x 4 Ft.Canopy
	• CP2022 — 4 In x 3 Ft		• OP2262 — 8 In x 2 Ft Catenary
	• CP2024 — 4 In x 4 Ft		• 0P2263 — 8 In x 3 Ft Catenary
Pendants	• CP2026 — 4 In x 5 Ft		• OP2264 — 8 In x 4 Ft Catenary
	• CP2028 — 4 In x 6 Ft	Outdoor Wall	• 0W5201 — 34 In Outdoor Wall
	• CP2030 — 4 In x 8 Ft	Units	• 0W5203 — 45 In Outdoor Wall
8" Diameter Pendants	• CP2036 — 8 In x 2 Ft		• CP5820 — 4 in x 2 ft
	• CP2038 — 8 In x 3 Ft	4" Indoor Sequence Square	• CP5822 — 4 in x 3 ft
	• CP2040 — 8 In x 4 Ft		• CP5824 — 4 in x 4 ft
	• CP2042 — 8 In x 5 Ft		• CP5826 — 4 in x 5 ft
	• CP2044 — 8 In x 6 Ft		• CP5828 — 4 in x 6 ft
	• CP2046 — 8 In x 8 Ft		• CP5830 — 4 in x 8 ft
	• CP2052 — 12 In x 2 Ft	8" Indoor Sequence Square	• CP5836 — 8 in x 2 ft
	• CP2054 — 12 In x 3 Ft		• CP5838 — 8 in x 3 ft
12"	• CP2056 — 12 In x 4 Ft		• CP5840 — 8 in x 4 ft
Diameter Pendants	• CP2058 — 12 In x 5 Ft		• CP5842 — 8 in x 5 ft
	• CP2060 — 12 In x 6 Ft		• CP5844 — 8 in x 6 ft
	• CP2062 — 12 In x 8 Ft		• CP5846 — 8 in x 8 ft
	• OP2222 — 4 In x 3 Ft Canopy	Vertical Sequence Mini	CDC000 2:
Outdoor 4" Diameter Pendants	• OP2223 — 4 In x 4 Ft Canopy		• CP6000 — 2 in; various lengths
	• OP2224 — 4 In x 5 Ft Canopy	Horizontal	CDC002 2:
	• 0P2232 — 4 In x 3 Ft Catenary	Sequence Mini	• CP6002 — 2 in; various lengths
	• 0P2233 — 4 In x 4 Ft Catenary		1
	• 0P2234 — 4 In x 5 Ft Catenary		
	1	1	

SUGGESTED VARIATIONS

- Custom lengths/lumen outputs
- Alternative downlight bezel and end cap color
- Multi-fixture clusters via custom multipoint canopies
- Angled mounting via additional hang cable

See <u>Visalighting.com/Sequence</u>, <u>Visalighting.com/Sequence</u>-Square and Visalighting.com/Sequence-Mini for more information



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)



Alternative Metal Finishes (Premium)



Metal Finish (Premium)

