


CP7120 ZUME™ IN

Indoor Luminous Globe



VisaLighting.com/products/Zume-In

Type: _____ Project: _____ Location: _____

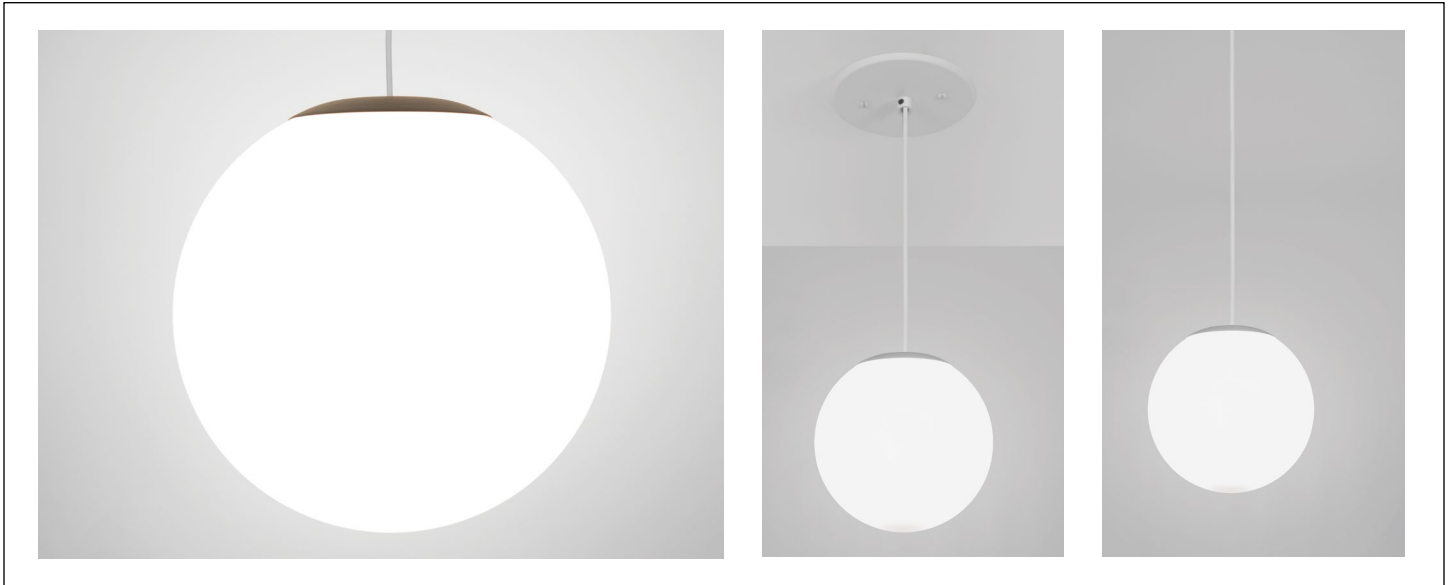

DIMENSIONS 1,6

OAH MUST BE SPECIFIED


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane

DIA = Diameter OAH = Standard Overall Height WT=Weight


CP7120-	6	8	12	16	22
DIA	6" (152 mm)	8" (203 mm)	12" (305 mm)	16" (406 mm)	22" (559 mm)
MIN OAH	14" (356 mm)	16" (406 mm)	20" (508 mm)	24" (610 mm)	30" (762 mm)
STD OAH	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)
MAX OAH	192" (4877 mm)	192" (4877 mm)	192" (4877 mm)	192" (4877 mm)	192" (4877 mm)
WT	4 lbs	4 lbs	5 lbs	6 lbs	10 lbs

FEATURES


- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Consistent luminance across all sizes
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5-1/4" diameter and 1/2" deep
- Driver in canopy (SDC) includes round canopy 6-3/8" diameter and 1-1/2" deep
- Canopy mounts over 4x4 junction box (by others) with provided hardware and is painted white
- One piece gloss white acrylic globe for seamless appearance
- Suspended by 2-conductor white power cord (8", 12" and 16"); 22" suspended by aircraft cable
- Non-VOC powder coat finishes or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications

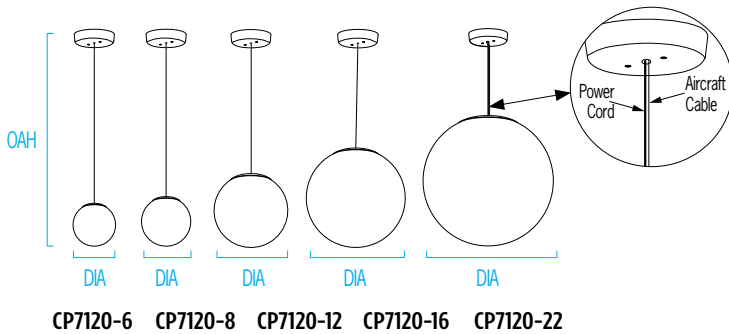

PHOTOMETRICS

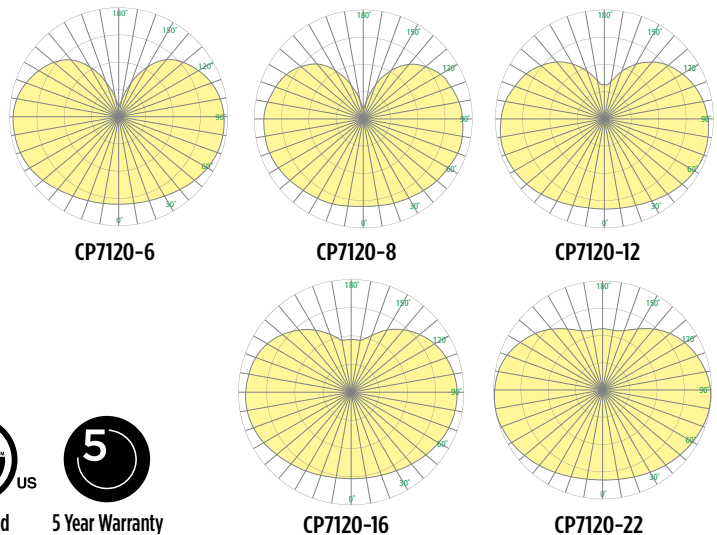

RELATIVE SCALE DRAWING

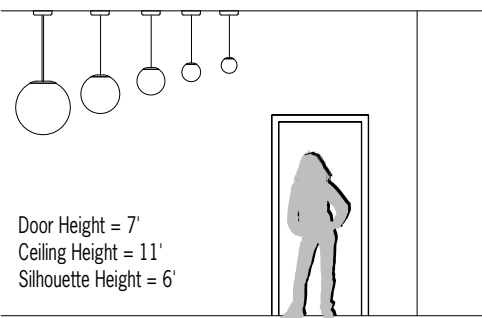

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



Fill in shaded boxes using information listed below

CP7120		- MVOLT							
MODEL	DIAMETER ¹	SOURCE ²	SOURCE OPTION ³	VOLTAGE MVOLT	CAP FINISH	CORD COLOR ⁴	DRIVER ⁵	OPTION ⁶	OAH ⁷
	6" 8" 12" 16" 22"	L30K L35K L40K	90CRI Minimum 80CRI is standard if option is not selected		See last page for finish order codes	BSC WSC GSC	RMD SDC	DCC	See page 1

See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Bodylight Source	Delivered Lumens				
	CP7120-6	CP7120-8	CP7120-12	CP7120-16	CP7120-22
L30K	750	1050	2300	3500	5900
L35K	775	1100	2400	3600	6100
L40K	800	1150	2400	3800	6300
Power (Watts)	6	8	17	30	47

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	>55,000 hrs
----------------	-------------

SOURCE OPTION³

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 15%)
-------	--


DRIVER⁴ (Select one)

⚠ Availability may be interdependent with Voltage, Source or Other Options

SDC	Surface canopy with integral driver; canopy is painted white
RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white. See page 3 for more information

CORD COLOR⁴ (Select one)

Cord Color Options		Suggested Cord Colors for Premium Finishes	
BSC	Black power cord	OBA, BZA, PRA, RBA	BSC
WSC	White power cord	BBA, BUA	WSC
GSC	Gray power cord	BCA, BA, SNA	GSC

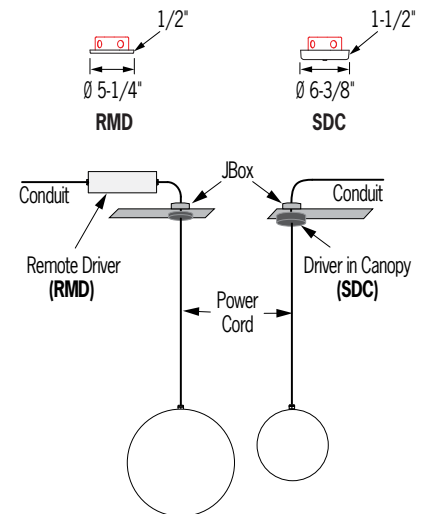


Options continued on Page 3

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



REMOTE DRIVER (RMD) INFORMATION

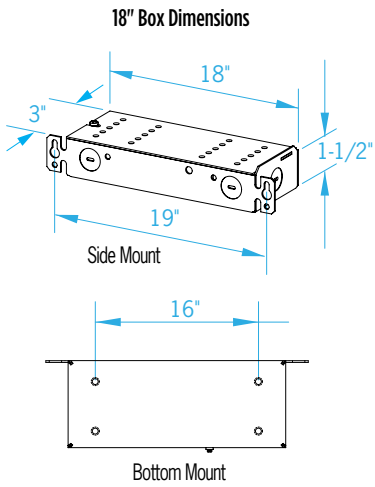

Model	Maximum Recommended Remote Wiring Distance from RMD to fixture canopy			
	12AWG	14AWG	16AWG	18AWG
CP7120-6	2000	1250	750	500
CP7120-8	1425	900	550	325
CP7120-12	550	350	225	125
CP7120-16	250	150	100	50
CP7120-22	100	50	25	25

All distances in feet

Remote driver boxes have knockouts for conduit connections

OPTION⁵

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



ZUME PRODUCT FAMILY

Indoor	White LED		RGBW	
Zume In	<ul style="list-style-type: none"> • CP7120-6 • CP7120-8 • CP7120-12 • CP7120-16 	Cord Suspension	<ul style="list-style-type: none"> • CP7126-8 • CP7126-12 • CP7126-16 • CP7126-22 	Stem
	<ul style="list-style-type: none"> • CP7120-22 	Cord & Cable Suspension		
Zume DL	<ul style="list-style-type: none"> • CP7122-12 • CP7122-16 • CP7122-22 	Cord & Cable Suspension	<ul style="list-style-type: none"> • CP7128-8 • CP7128-12 • CP7128-16 • CP7128-22 	Stem
Outdoor				
Zume Out	Cord & Cable Suspension	<ul style="list-style-type: none"> • OP2120-ShortCap — 12" • OP2130-ShortCap — 16" • OP2140-ShortCap — 20" 	<ul style="list-style-type: none"> • OP2120-SolidCap — 12" • OP2130-SolidCap — 16" • OP2140-SolidCap — 20" 	<ul style="list-style-type: none"> • OP2120-SlottedCap — 12" • OP2130-SlottedCap — 16" • OP2140-SlottedCap — 20"
	Catenary Suspension	<ul style="list-style-type: none"> • OP2122-ShortCap — 12" • OP2132-ShortCap — 16" • OP2142-ShortCap — 20" 	<ul style="list-style-type: none"> • OP2122-SolidCap — 12" • OP2132-SolidCap — 16" • OP2142-SolidCap — 20" 	<ul style="list-style-type: none"> • OP2122-SlottedCap — 12" • OP2132-SlottedCap — 16" • OP2142-SlottedCap — 20"
	Stem Suspension	<ul style="list-style-type: none"> • OP2124-ShortCap — 12" • OP2134-ShortCap — 16" • OP2144-ShortCap — 20" 	<ul style="list-style-type: none"> • OP2124-SolidCap — 12" • OP2134-SolidCap — 16" • OP2144-SolidCap — 20" 	<ul style="list-style-type: none"> • OP2124-SlottedCap — 12" • OP2134-SlottedCap — 16" • OP2144-SlottedCap — 20"

See [Visalighting.com/families/zume](https://visalighting.com/families/zume) for more information

SUGGESTED VARIATION

- Recommend Model CP7122 with custom cover plate over downlight opening for CCT consistency in spaces requiring combinations of globes with and without downlight

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes


Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
						
GLWT Glacier White	GSIL Graphite Siver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
						
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	

Alternative Metal Finishes (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)


BA Brushed Aluminum

