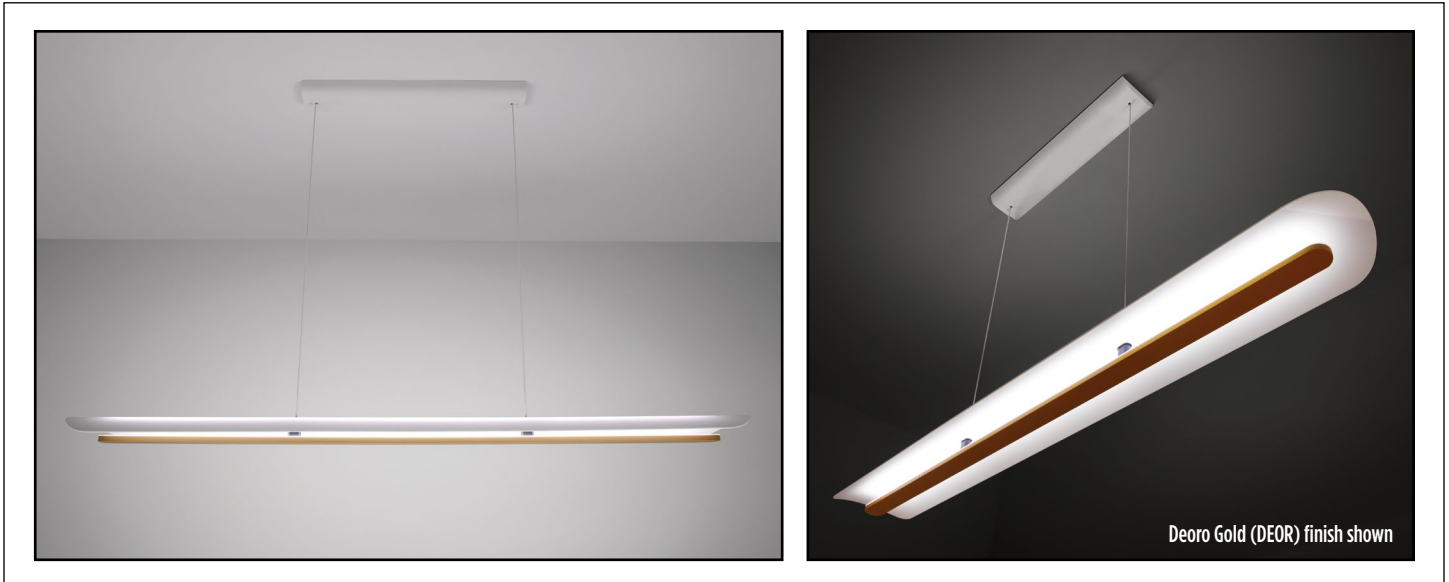


CP2800 VOLARE™


VisaLighting.com/products/Volare


Type: _____ Project: _____ Location: _____

DIMENSIONS^{1,6}


W = Width L = Length OAH = Standard Overall Height WT = Weight

| | CP2800-47 | CP2800-63 | CP2800-85 |
|----------------|-------------------|---------------|---------------|
| L | 46-1/2" (1181 mm) | 63" (1600 mm) | 85" (2159 mm) |
| W | 8-1/2" (216 mm) | | |
| OAH | 48" (1219 mm) | | |
| MAX OAH | 144" (3658 mm) | | |
| WT | 5-1/2 lb | 7 lb | 9-1/2 lb |

End View

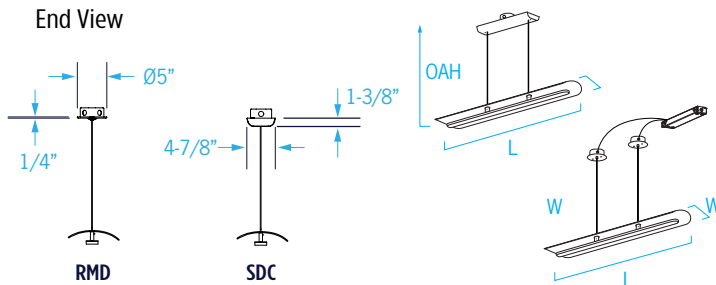


RELATIVE SCALE DRAWING

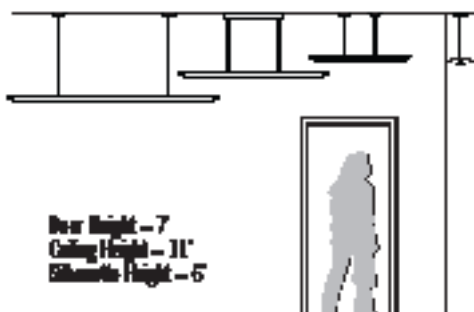

FEATURES

- Available in 4ft, 5ft, and 7ft nominal lengths
- High or low lumen output; ambient illumination in up and down directions
- 0-10V to 1% dimming
- 90 CRI Standard
- Remote Driver (RMD) includes 2 round canopies that mount over (2) octagonal junction boxes centered above each cord (by others). Canopies are 5" diameter and 1/4" deep and are painted white. See page 3 for more information
- Driver in Canopy (SDC) includes rectangular driver enclosure with decorative curved profile and mounts over (1) standard 4x4 or octagonal junction box centered above the fixture (by others). Canopy is 1-1/2" deep with lengths of 17-1/4", 24" and 46-3/4" respective to fixture length and painted white. See page 3 for more information
- Suspended via black, white, or grey cloth braided power cord. Overall height (OAH) can be field adjusted to a shorter length during installation
- Canopy is painted white
- Translucent acrylic shade gently curves over a thin lightbar
- Light bar is suspended under the acrylic with hidden supports and appears to float underneath the illuminated shade. Supports are painted black; 47" and 63" models have (2) supports, 85" has (3) supports
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suited for exterior applications

PHOTOMETRICS

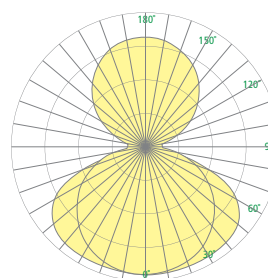

Fill in shaded boxes using information listed below

| | | | | | | | |
|--------|---------------------|--|------------------|--|-------------------------|---------------------|-----------------|
| CP2800 | | | MVOLT | | | | |
| MODEL | LENGTH ¹ | SOURCE ² | VOLTAGE MVOLT | BAR FINISH | CORD COLOR ³ | DRIVER ⁴ | OA ⁵ |
| | 47 63 85 | L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L) | | See last page for finish order codes | BSC GSC WSC | RMD SDC | See page 1 |

SOURCE² (Select one length and one source)

Dimmable 0-10V to 1%, Minimum 83CRI, within 3-step MacAdam

| SOURCE | CCT | 47" | | 63" | | 85" | |
|---------|-------|------------------|-------------|------------------|-------------|------------------|-------------|
| | | Delivered Lumens | Power/Watts | Delivered Lumens | Power/Watts | Delivered Lumens | Power/Watts |
| L30K(H) | 3000K | 4500 | 41 | 6000 | 53 | 8100 | 72 |
| L30K(L) | 3000K | 3000 | 26 | 4000 | 34 | 5400 | 46 |
| L35K(H) | 3500K | 4600 | 41 | 6200 | 53 | 8400 | 72 |
| L35K(L) | 3500K | 3100 | 26 | 4100 | 34 | 5500 | 46 |
| L40K(H) | 4000K | 4700 | 41 | 6200 | 53 | 8500 | 72 |
| L40K(L) | 4000K | 3100 | 26 | 4100 | 34 | 5600 | 46 |

VOLTAGE

| | |
|-------|--------------------|
| MVOLT | 120-277V, 50/60 Hz |
|-------|--------------------|

LUMEN MAINTENANCE RATING

| | |
|----------------|-------------|
| L80 (reported) | >60,000 hrs |
|----------------|-------------|

CORD COLOR⁴ (Select one)


| | |
|-----|-------------------------------------|
| BSC | Black linen braided over power cord |
| GSC | Gray linen braided over power cord |
| WSC | White linen braided over power cord |



DRIVER⁵ (Select one) See page 3 for more information


⚠ Availability may be interdependent with Voltage, Source or Other Options

| | |
|-----|---|
| SDC | Surface canopy with integral driver; canopy is painted white |
| RMD | Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). |


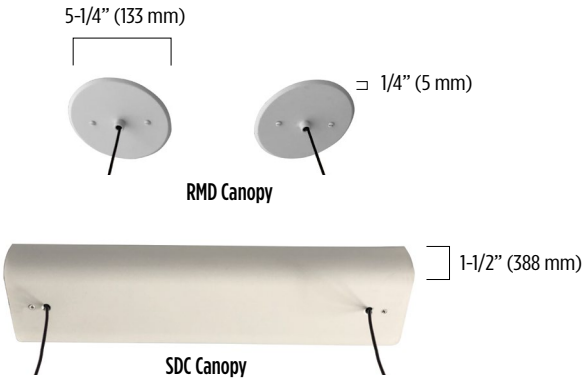


CP2800 VOLARE (cont.)

SURFACE CANOPY DRIVER (SDC) INFORMATION

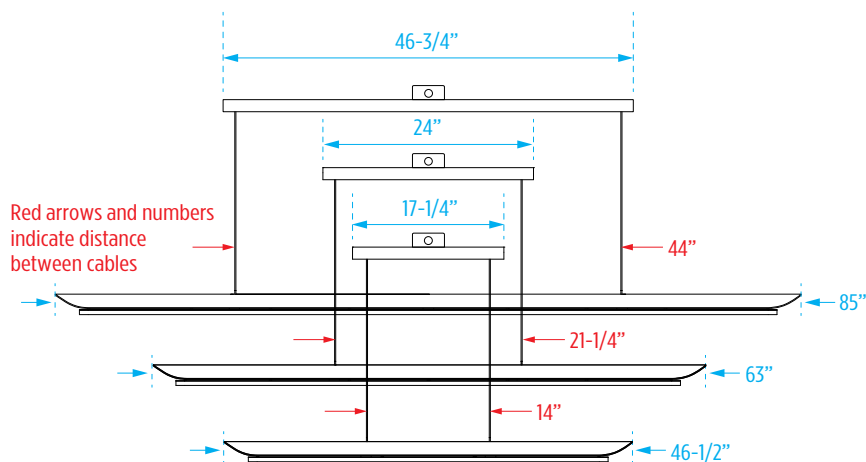

REMOTE DRIVER (RMD) INFORMATION

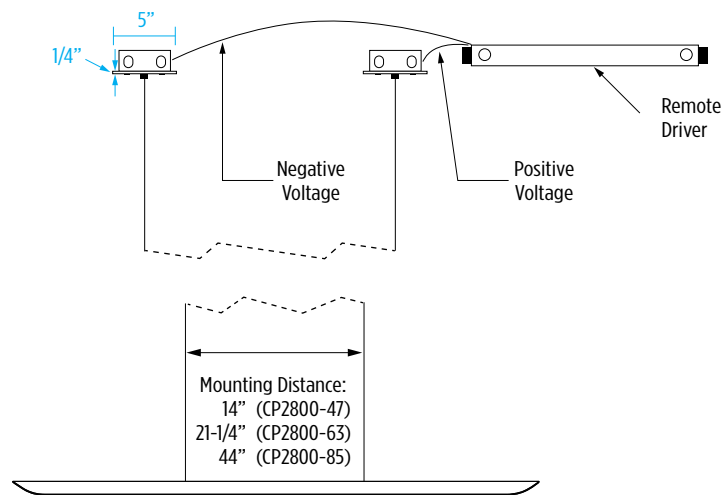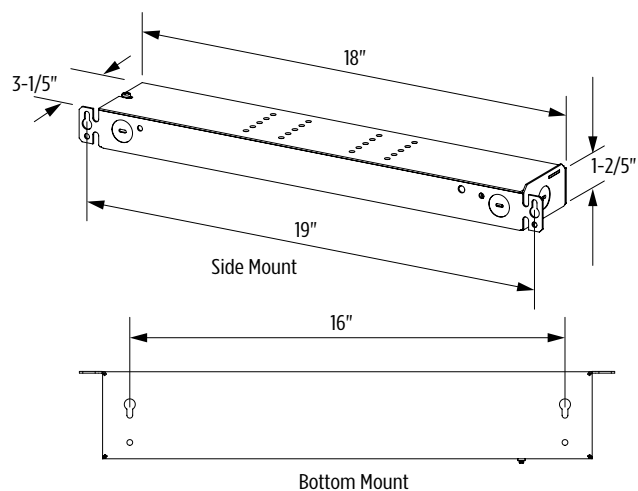

Remote driver boxes have knockouts for conduit connections

Maximum Recommended Remote Wiring Distance from **RMD** to fixture canopy

- 18AWG – 50ft
- 16AWG – 80ft
- 14AWG – 130ft
- 12AWG – 200ft
- 10AWG – 330ft

CP2800 VOLARE (cont.)



VOLARE PRODUCT FAMILY

- CP2800 – 47"
- CP2800 – 63"
- CP2800 – 85"

SUGGESTED VARIATIONS






- Custom colors

See [Visalighting.com/products/Volare](https://visalighting.com/products/Volare) for more information

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).
For more information about our finishes visit visalighting.com/products/volare

Powder Coat Paint Finishes (Standard)

| | | | | | | |
|--|---|---|---|--|---|--|
|  |  |  |  |  |  |  |
| AGGY Agate Grey | ALGN Alpine Green | BMAT Bronze Matte | BRNZ Bronze | BSIL Blade Silver | CVBL Cove Blue | DEOR Deoro Gold |
|  |  |  |  |  |  |  |
| GLWT Glacier White | GSIL Graphite Silver | HRGR Harbor Grey | JTBK Jet Black | OCBL Ocean Blue | SHGR Shoreline Grey | SBGN Sagebrush Green |
|  |  |  |  |  |  | |
| SLGR Slate Grey | SSTP Sierra Taupe | TRCN Terracotta Canyon | TRWT Traffic White | VBLK Velvet Black | VNRD Vineyard Red | |