

CP7120 ZUME™ IN

Indoor Luminous Globe


 VISA LIGHTING

VisaLighting.com/products/Zume-In

Type: _____

Project: _____

Location: _____

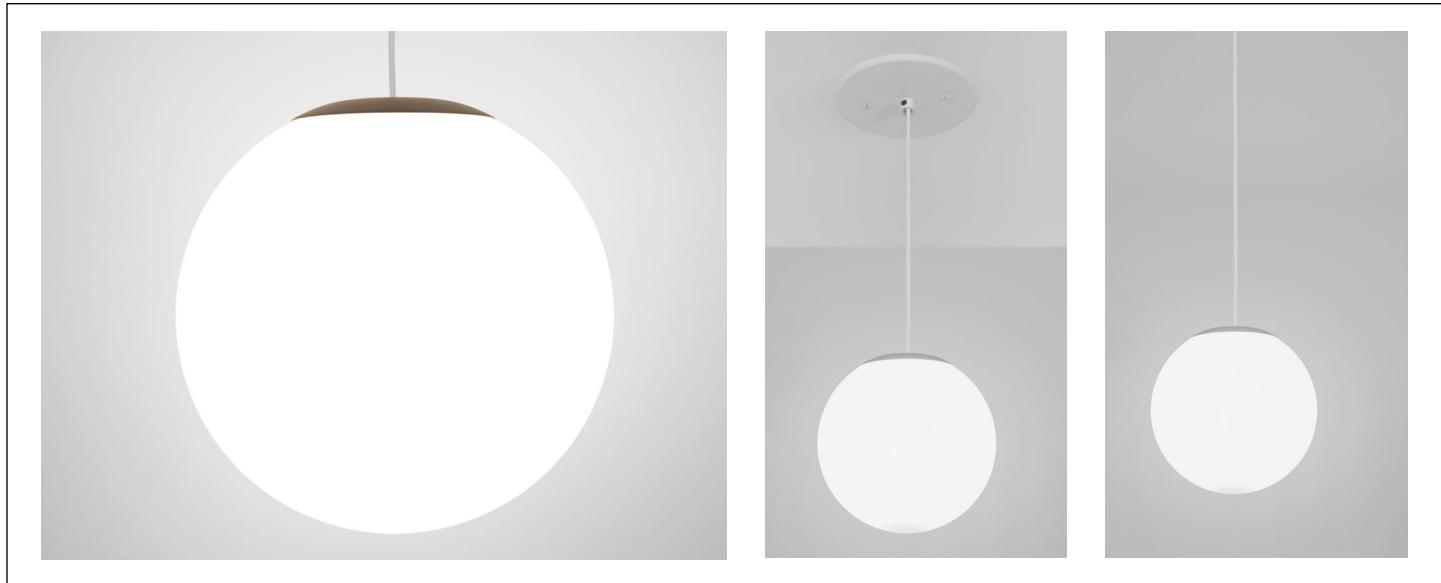DIMENSIONS^{1,6}

OAH MUST BE SPECIFIED


OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane

DIA = Diameter

OAH = Standard Overall Height


WT=Weight

CP7120-	6	8	12	16	22
DIA	6" (152 mm)	8" (203 mm)	12" (305 mm)	16" (406 mm)	22" (559 mm)
MIN OAH	14" (356 mm)	16" (406 mm)	20" (508 mm)	24" (610 mm)	30" (762 mm)
STD OAH	48" (1219 mm)				
MAX OAH	192" (4877 mm)				
WT	4 lbs	4 lbs	5 lbs	6 lbs	10 lbs

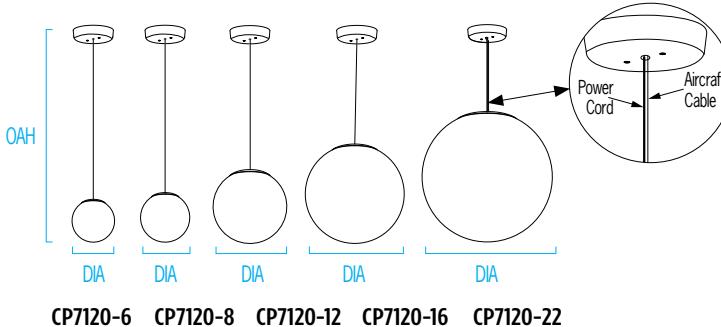

CP7120-6 CP7120-8 CP7120-12 CP7120-16 CP7120-22

RELATIVE SCALE DRAWING

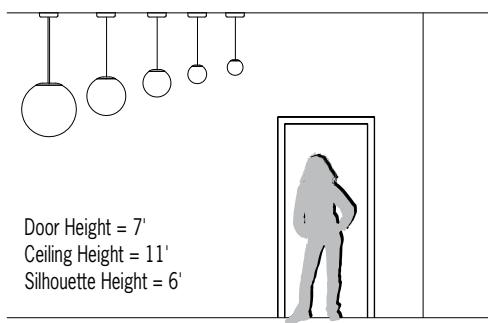

Door Height = 7'
Ceiling Height = 11'
Silhouette Height = 6'



VisaLighting.com

Page 1


FEATURES

- BAA (Buy American Act) and BABA (Build American, Buy America) compliant
- Consistent luminance across all sizes
- Remote Driver (RMD) or Driver in Canopy (SDC) configurations available
- Remote Driver (RMD) includes round canopy 5-1/4" diameter and 1/2" deep
- Driver in canopy (SDC) includes round canopy 6-3/8" diameter and 1-1/2" deep
- Canopy mounts over octagonal junction box (by others) with provided hardware and is painted white
- One piece gloss white acrylic globe for seamless appearance
- Suspended by 2-conductor white power cord (8", 12" and 16"); 22" suspended by aircraft cable
- Non-VOC powder coat finishes or environmentally friendly low VOC metal alternative finishes
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS




CP7120-6




CP7120-8



CP7120-12



CP7120-16



CP7120-22

CP7120 ZUME IN (cont.)

Indoor Luminous Globe

Fill in shaded boxes using information listed below

CP7120		- MVOLT							
MODEL	DIAMETER ¹	SOURCE ²	SOURCE OPTION ³	VOLTAGE MVOLT	CAP FINISH	CORD COLOR ⁴	DRIVER ⁵	OPTION ⁶	OAH ⁷
	6" 8" 12" 16" 22"	L30K L35K L40K	90CRI Minimum 80CRI is standard if option is not selected	MVOLT	See last page for finish order codes	BSC WSC GSC	RMD SDC	DCC	See page 1

See page 1

SOURCE² (Select one)

Dimmable 0-10V to 1%, minimum 80CRI, within 3-step MacAdam

Bodylight Source	Delivered Lumens				
	CP7120-6	CP7120-8	CP7120-12	CP7120-16	CP7120-22
L30K	750	1050	2300	3500	5900
L35K	775	1100	2400	3600	6100
L40K	800	1150	2400	3800	6300
Power (Watts)	6	8	17	30	47

SOURCE OPTION³

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 15%)
-------	--

DRIVER⁴ (Select one)

⚠ Availability may be interdependent with Voltage, Source or Other Options

SDC	Surface canopy with integral driver; canopy is painted white
RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC). Canopy is painted white. See page 3 for more information

CORD COLOR⁴ (Select one)

Cord Color Options	Suggested Cord Colors for Premium Finishes
BSC	OBA, BZA, PRA, RBA
WSC	BBA, BUA
GSC	BCA, BA, SNA




VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	>55,000 hrs
----------------	-------------

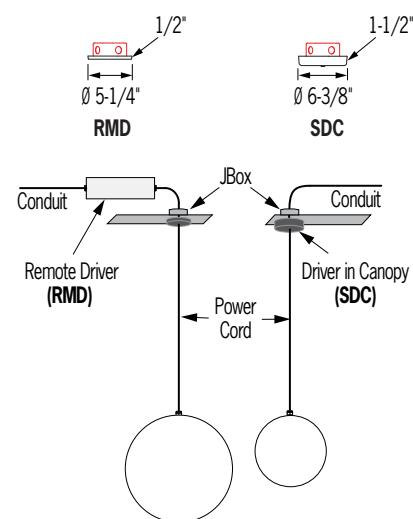


Options continued on Page 3

CP7120 ZUME IN (cont.)

Indoor Luminous Globe

REMOTE DRIVER (RMD) INFORMATION

18" Box Dimensions

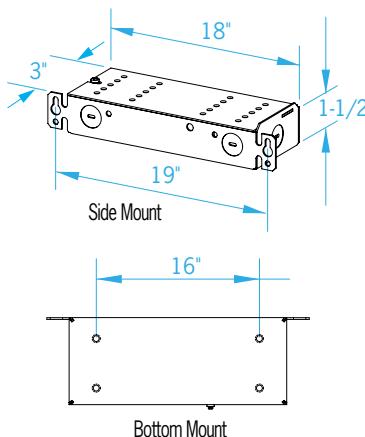

Model	Maximum Recommended Remote Wiring Distance from RMD to fixture canopy			
	12AWG	14AWG	16AWG	18AWG
CP7120-6	2000	1250	750	500
CP7120-8	1425	900	550	325
CP7120-12	550	350	225	125
CP7120-16	250	150	100	50
CP7120-22	100	50	25	25

All distances in feet

Remote driver boxes have knockouts for conduit connections

OPTION⁵

 Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



ZUME PRODUCT FAMILY

Indoor	White LED		RGBW	
Zume In	• CP7120-6 • CP7120-8 • CP7120-12 • CP7120-16	Cord Suspension	• CP7126-8 • CP7126-12 • CP7126-16 • CP7126-22	Stem
	• CP7120-22	Cord & Cable Suspension		
Zume DL	• CP7122-12 • CP7122-16 • CP7122-22	Cord & Cable Suspension	• CP7128-8 • CP7128-12 • CP7128-16 • CP7128-22	Stem
Outdoor				
Zume Out	Cord & Cable Suspension	• OP2120-ShortCap — 12" • OP2130-ShortCap — 16" • OP2140-ShortCap — 20"	• OP2120-SolidCap — 12" • OP2130-SolidCap — 16" • OP2140-SolidCap — 20"	• OP2120-SlottedCap — 12" • OP2130-SlottedCap — 16" • OP2140-SlottedCap — 20"
	Catenary Suspension	• OP2122-ShortCap — 12" • OP2132-ShortCap — 16" • OP2142-ShortCap — 20"	• OP2122-SolidCap — 12" • OP2132-SolidCap — 16" • OP2142-SolidCap — 20"	• OP2122-SlottedCap — 12" • OP2132-SlottedCap — 16" • OP2142-SlottedCap — 20"
	Stem Suspension	• OP2124-ShortCap — 12" • OP2134-ShortCap — 16" • OP2144-ShortCap — 20"	• OP2124-SolidCap — 12" • OP2134-SolidCap — 16" • OP2144-SolidCap — 20"	• OP2124-SlottedCap — 12" • OP2134-SlottedCap — 16" • OP2144-SlottedCap — 20"

See Visalighting.com/families/zume for more information

SUGGESTED VARIATION

- Recommend Model CP7122 with custom cover plate over downlight opening for CCT consistency in spaces requiring combinations of globes with and without downlight

CP7120 ZUME IN (cont.)

Indoor Luminous Globe



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze
GLWT	Glacier White	GSIL	Graphite Silver	HRGR	Harbor Grey	JTBK	Jet Black
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White
VISL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold		
OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green		
VBLK	Velvet Black	VNRD	Vineyard Red				

Alternative Metal Finishes (Premium)

BBA	Brushed Brass Alternative	BCA	Brushed Chrome Alternative
OBA	Oil-Rubbed Bronze Alternative	PRA	Pewter Alternative
BUA	Brushed Copper Alternative	RBA	Rustic Brass Alternative
SNA	Satin Nickel Alternative		

Metal Finish (Premium)



BA Brushed Aluminum

