


## OW3942 SANIBEL™

Outdoor Sconce

 VISA LIGHTING

[VisaLighting.com/families/Sanibel](https://VisaLighting.com/families/Sanibel)

Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

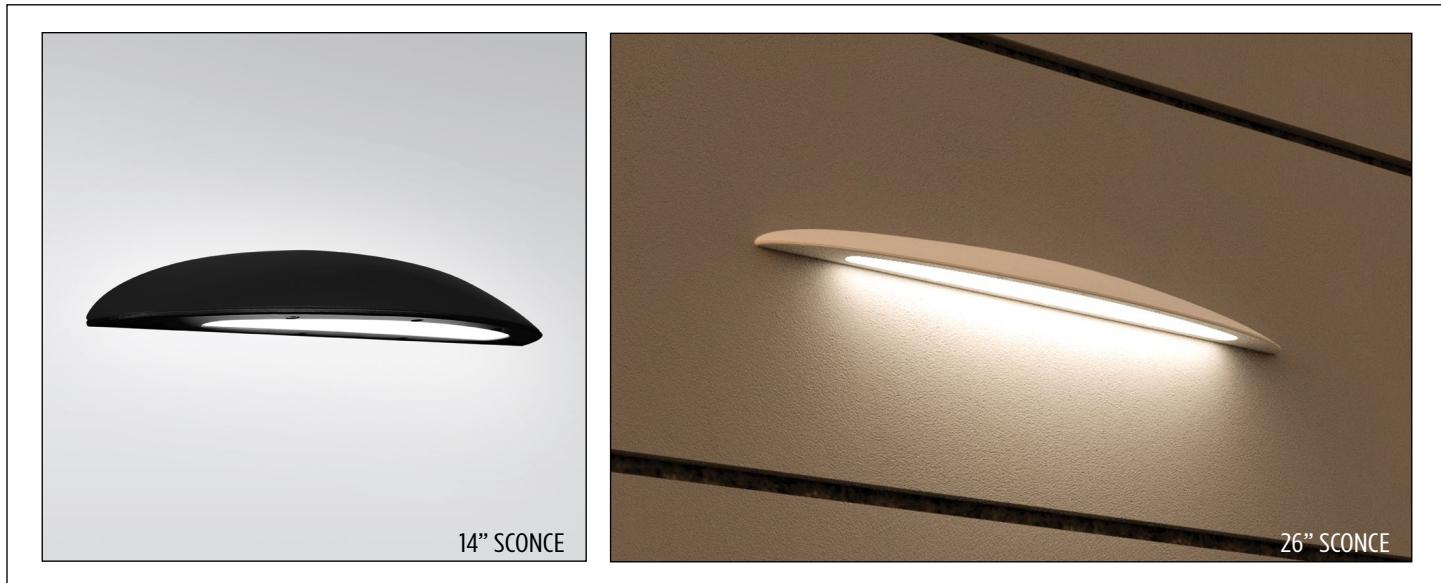DIMENSIONS<sup>1</sup>

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

OW3942-14      OW3942-26


W	14-3/4" (375 mm)	26-1/2" (673 mm)
H	2-1/8" (54 mm)	
D	2-7/8" (73 mm)	3-1/4" (83 mm)




## FEATURES

- Die cast aluminum housing
- Frosted acrylic lens
- May be mounted in uplight or downlight orientation
- High and low lumen output options
- Optional 90+ CRI
- Dimmable 0-10V to 1%
- Remote driver standard and included
- Easily cleaned slim profile
- IP65 rated
- Non-VOC powder coat paint finish
- ETL listed for wet locations


## RELATIVE SCALE DRAWING

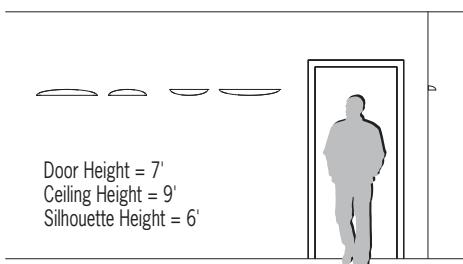

## PHOTOMETRICS



Downlight



Uplight



## 0W3942 SANIBEL (cont.)

## Outdoor Sconce



Fill in shaded boxes using information listed below

		MVOLT			
MODEL <sup>1</sup>	SOURCE <sup>2</sup>	SOURCE OPTION <sup>3</sup>	VOLTAGE	MOUNTING	FINISH
0W3942-14 0W3942-26  See page 1	L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI  Minimum 80CRI is standard if option is not selected	MVOLT	NOJBC JBC2 JBC4	See last page for finish order codes

SOURCE<sup>2</sup> (Select one source)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	0W3942-14		0W3942-26	
		Delivered Lumens	Power/ Watts	Delivered Lumens	Power/ Watts
L30K(H)	3000K	950	22	1900	43
L30K(L)	3000K	450	9	950	15
L35K(H)	3500K	1000	22	2000	43
L35K(L)	3500K	500	9	1000	15
L40K(H)	4000K	1000	22	2000	43
L40K(L)	4000K	500	9	1000	15

SOURCE OPTION<sup>3</sup>

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 15%)
-------	--

MOUNTING OPTION<sup>4</sup> (Select one)

NOJBC	Mounting plate used when not mounting over any standard junction box
JBC2	Junction box cover for use with an existing 2"x4" rectangular junction box (by others). Painted to match finish
JBC4	Junction box cover (4-1/2" square) for use with an existing 4" octagonal junction box (by others). Painted to match finish


## Maximum Recommended Remote Wiring Distance from Remote Driver to Fixture

Wire Size AWG	Maximum Remote Distance in Feet	
	CB3924-14	CB3942-26
12GA	550	300
14GA	350	175
16GA	225	100
18GA	125	75


## LUMEN MAINTENANCE RATING

L85 (reported)	≥60,000 hrs
----------------	-------------

Reported Lifetime per IES TM-21

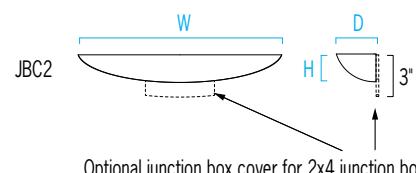


Optional junction box cover for 2x4 junction box

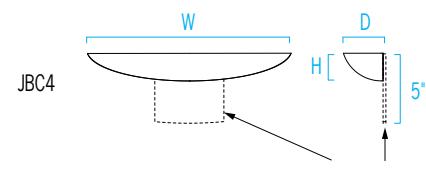

Optional Junction Box Cover for 4x4 Junction Box

JBC Option

## REMOTE DRIVER DETAILS



# OW3942 SANIBEL (cont.)

## Outdoor Sconce



### SANIBEL PRODUCT FAMILY

<b>Behavioral Health / High Abuse</b>	<b>14"</b>	• CB3944-14
	<b>26"</b>	• CB3944-26
<b>Indoor – Non-Behavioral Health</b>	<b>14"</b>	• CB3942-14
	<b>26"</b>	• CB3942-26
<b>Outdoor</b>	<b>14"</b>	• OW3942-14
	<b>26"</b>	• OW3942-26

### SUGGESTED VARIATIONS

- Custom colors
- Tunable white
- RGB or RGBW

See [Visalighting.com/families/Sanibel](http://Visalighting.com/families/Sanibel) for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](http://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue	DEOR Deoro Gold
GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey	SBGN Sagebrush Green
SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red	