


# INSTALLATION INSTRUCTIONS

Model: **CP2600**  
 Fixture Family: **SAIL**  
 Document Description: Installation Instructions for  
 LED Series Luminaires


**VISA LIGHTING**  
 AN OLDENBURG GROUP COMPANY  
 1717 West Civic Drive Milwaukee, WI 53209  
 414-354-6600  
 Design Modification Rights Reserved  
 © Visa Lighting 2016

## SAIL Pendant CP2600-Diameter

### SURFACE DRIVER CANOPY (SDC)

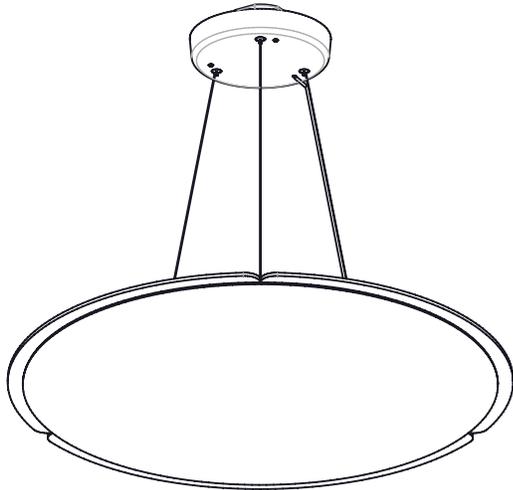

### REMOTE DRIVER CANOPY (RMD)

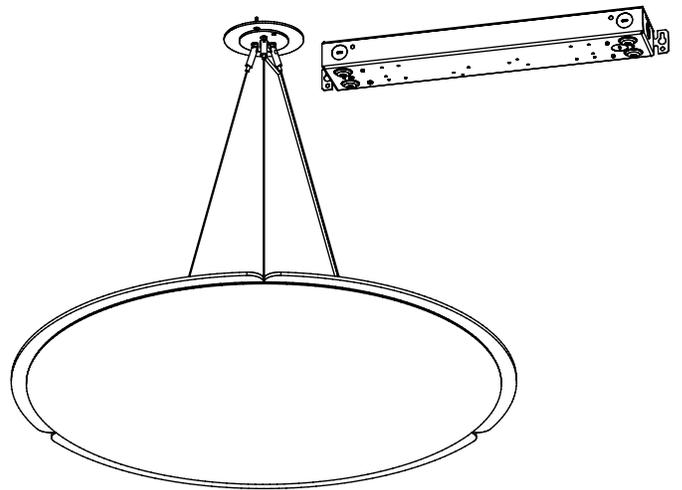

Drawing: 762368XX

Rev: A

Sheet: 1 of 3

Eng: AJM





Date Drawn: 4/15/22

### SHIPPING NOTES-

Each order will be bulk shipped in kits:

1. LED assembly
2. Canopy
3. Bag of zip ties
4. Remote driver box  
(if RMD option selected)

Zip ties

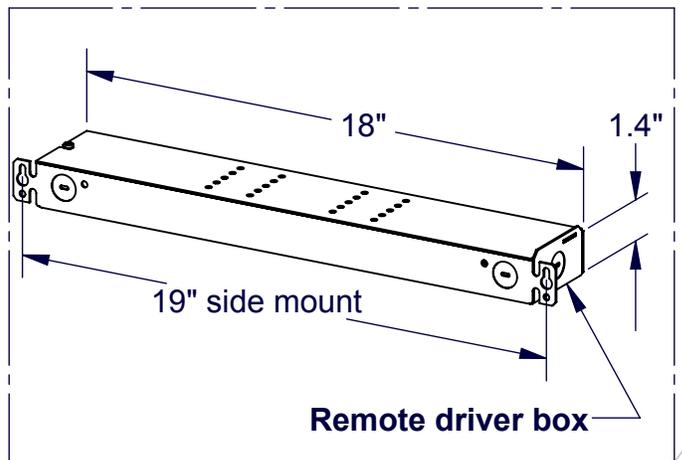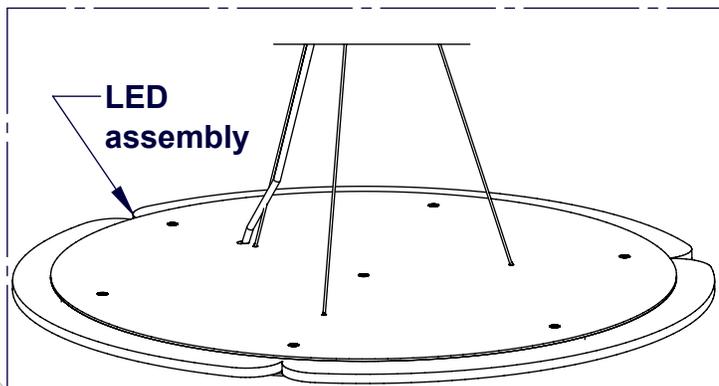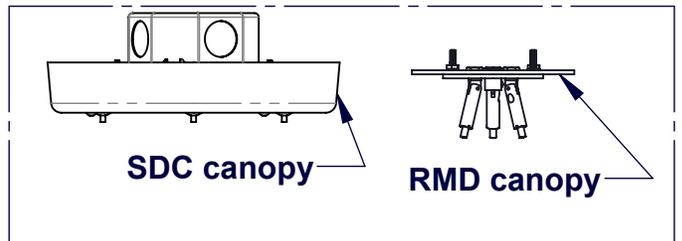

**!** When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

# INSTALLATION INSTRUCTIONS


Model: CP2600  
Fixture Family: SAIL  
Document Description: Installation Instructions for  
LED Series Luminaires

**VISA LIGHTING**  
1717 West Civic Drive Milwaukee, WI 53209  
414-354-6600  
Design Modification Rights Reserved  
© Visa Lighting


## SDC OPTION - CANOPY INSTALLATION

1. Fasten mounting plate to junction box with the junction box mounting screws (by others)
2. Wires exit the bottom of the driver. Make branch wire connections per local and national codes and attach the driver.
3. Pull the 3 suspension cables through the 3 larger holes in the spun cover and insert them into the 3 swivel cable grips. Level and adjust the height of the fixture.
4. Pull the power cord through one of the 3 smaller holes in the spun cover and secure it with the strain relief clamp. Make the low voltage connections to the driver.
5. Raise up the spun cover and secure it with the two canopy mounting screws.
6. Use the included zip ties to secure the power cord to the suspension cable it is closest to.


STEP 1:

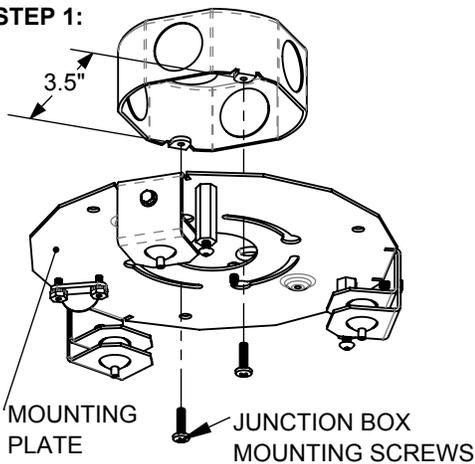


STEP 3,4,5,6:

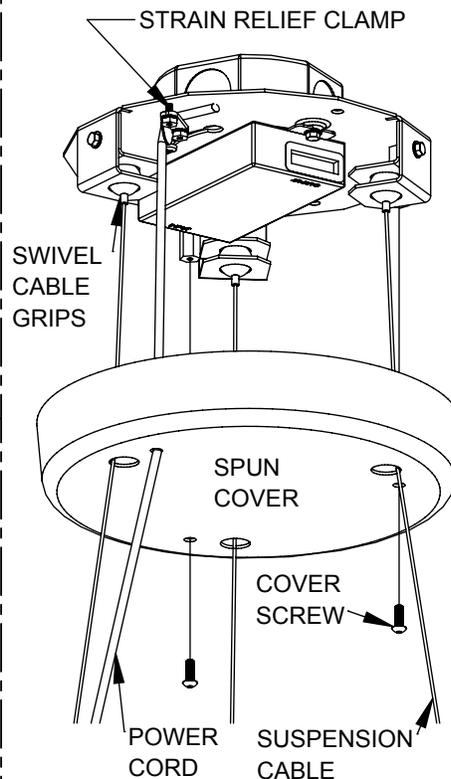


REFERENCE:

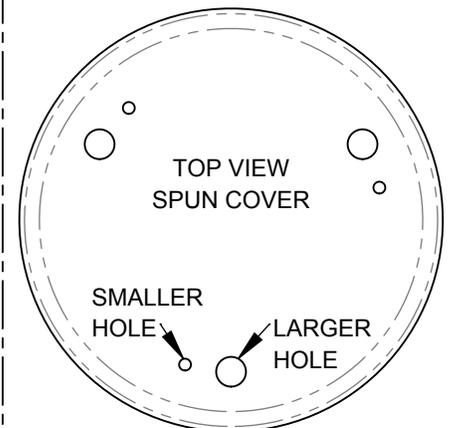

STEP 2:

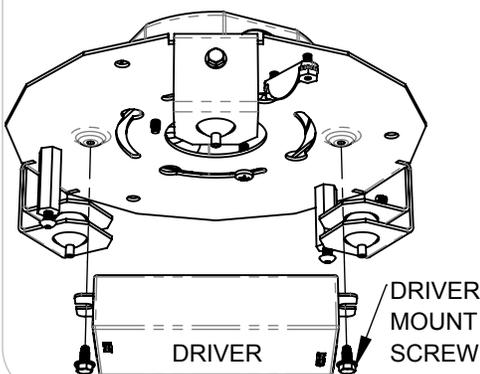

DONE!

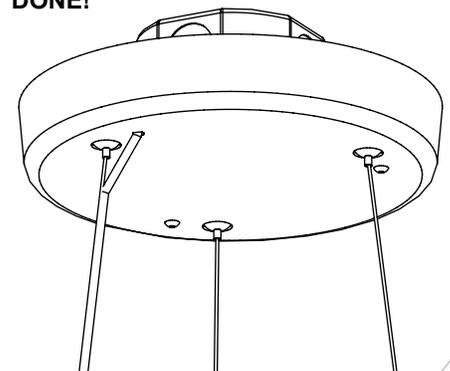

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

Drawing: 762368XX

Rev: A

Sheet: 2 of 3

Eng: AJM

Date Drawn: 4/15/22


# INSTALLATION INSTRUCTIONS

Model: **CP2600**  
Fixture Family: **SAIL**  
Document Description: Installation Instructions for  
LED Series Luminaires

**VISA LIGHTING**  
AN OLDENBURG GROUP COMPANY  
1717 West Civic Drive Milwaukee, WI 53209  
414-354-6600  
Design Modification Rights Reserved  
© Visa Lighting 2016

## RMD OPTION - CANOPY INSTALLATION


1. Mount to a 4x4 J-box
2. Rotate the smaller canopy as desired to align the cables with the room
3. Insert the power cord in the center strain relief and tie an overhand knot above it
4. Insert the three suspension cables into the cable grippers
5. Make all wire connections in accordance with local and national codes
6. Secure the canopy to the junction box using the provided painted screws
7. Adjust suspension cables until the desired overall height is achieved. Cut the excess suspension cable length coming out of the side of the cable gripper. Use the included zip ties to secure the power cord to the suspension cable it is closest to. Push excess power cord into the canopy and tighten the set screw in the power cord strain relief.

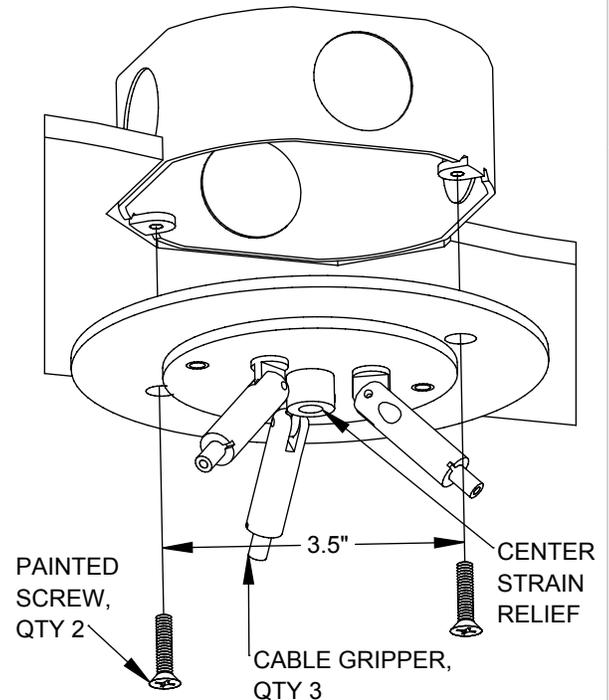

## RMD OPTION - DRIVER BOX

Components may vary depending on options ordered.

1. Remove cover by removing the cover screw.
2. Mount remote box in an accessible area per local and national codes, use fasteners appropriate for the mounting surface (not included).
3. Make all wire connections per local and national codes.

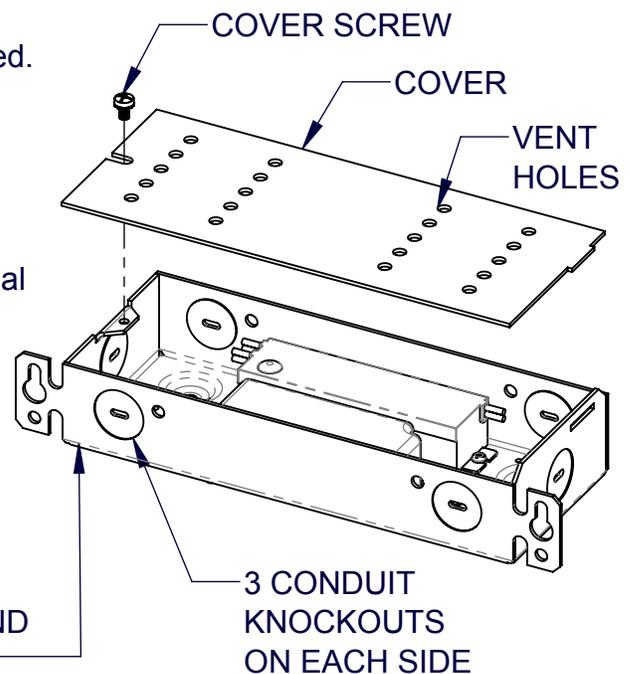

Drawing: 762368XX

Rev: A

Sheet: 3 of 3

Eng: AJM

Date Drawn: 4/15/22

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.