

CP4410 HELLEN

24" Direct Pendant



VisaLighting.com/products/Hellen


Type: _____ Project: _____ Location: _____



DIMENSIONS⁴

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA 24-3/8" (618 mm)
 X 9-1/4" (235 mm)
 OAH 120" (3048 mm)
 WT 10 lbs (4536 gm)

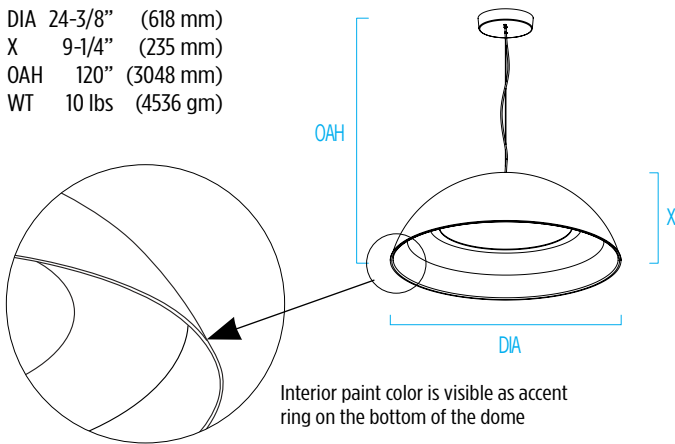


FEATURES

- Integral driver in canopy
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagon j-box
- Acrylic lens
- Spun aluminum bowl
- Non-VOC powder coat or environmentally friendly low VOC metal alternative finishes finishes available for outside of dome
- Non-VOC powder coat finishes available for inside of dome
- ETL listed for damp locations. Not suitable for exterior applications

RELATIVE SCALE DRAWING

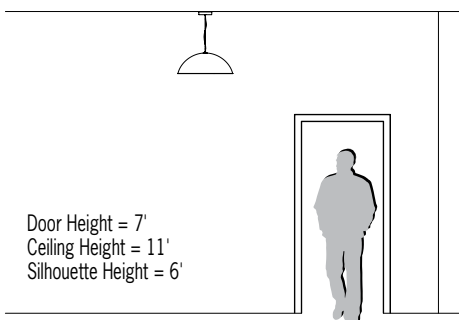

PHOTOMETRICS



CP4410 HELLEN (cont.)

24" Direct Pendant



Fill in shaded boxes using information listed below

CP4410		- MVOLT					
MODEL	SOURCE ¹	SOURCE OPTION ²	VOLTAGE	OUTER FINISH	REFLECTOR FINISH	OPTION ³	OAH ⁴
	L27K(H) L27K(L) L30K(H) L30K(L) L35K(H) L35K(L) L40K(H) L40K(L)	90CRI Minimum 80CRI is standard if option is not selected Minimum 90CRI is standard with 2700K Sources	MVOLT	See last page for finish order codes Canopy is painted white Alternative finishes are for outer dome only	See last page for finish order codes	DCC	See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	5500	58
L27K(M)*	2700K	3800	40
L27K(L)*	2700K	2200	22
L30K(H)	3000K	6000	58
L30K(M)	3000K	4100	40
L30K(L)	3000K	2400	22
L35K(H)	3500K	6200	58
L35K(M)	3500K	4200	40
L35K(L)	3500K	2500	22
L40K(H)	4000K	6300	58
L40K(M)	4000K	4300	40
L40K(L)	4000K	2500	22

*L27K sources are 90CRI standard

**Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	50,000 hrs
----------------	------------

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources (L27K sources: 90CRI is standard)
-------	--


OPTION³

⚠ Option availability may be interdependent with Other Options

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
-----	---

CP4410 HELLEN (cont.)

24" Direct Pendant

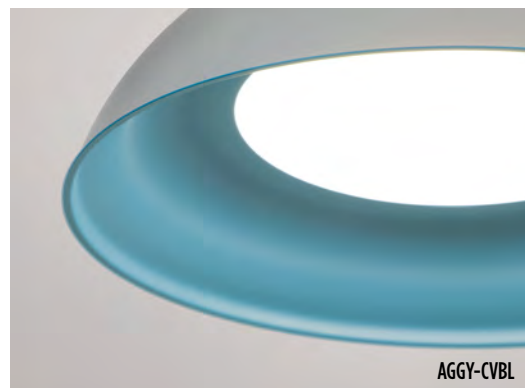

SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors
- Larger size

HELLEN PRODUCT FAMILY

- CP4408 – 16"
- CP4410 – 24"
- CP4412 – 32"

See [Visalighting.com/products/Hellen](https://www.visalighting.com/products/Hellen) for more information

CP4410 HELLEN (cont.)

24" Direct Pendant



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VBLK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

Alternative finishes are for outer dome only

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum