

# CP4412 HELLEN

32" Direct Pendant



[VisaLighting.com/products/Hellen](https://VisaLighting.com/products/Hellen)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_



## DIMENSIONS<sup>4</sup>

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA 32" (813 mm)  
 X 12-1/4" (305 mm)  
 OAH 120" (3048 mm)  
 WT 18 lbs (8165 gm)

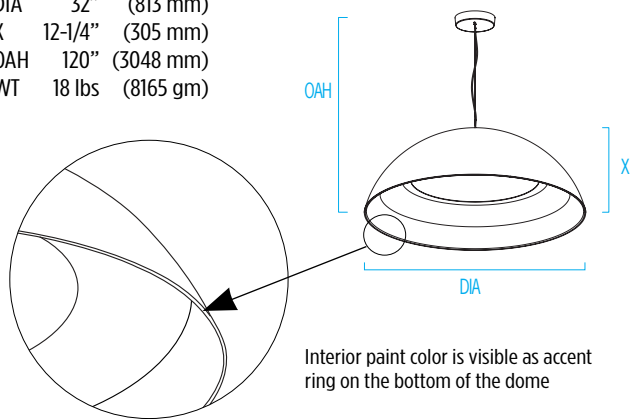


## FEATURES

- Integral driver in canopy
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagon j-box
- Acrylic lens
- Spun aluminum bowl
- Non-VOC powder coat finishes
- ETL listed for damp locations. Not suitable for exterior applications

## RELATIVE SCALE DRAWING

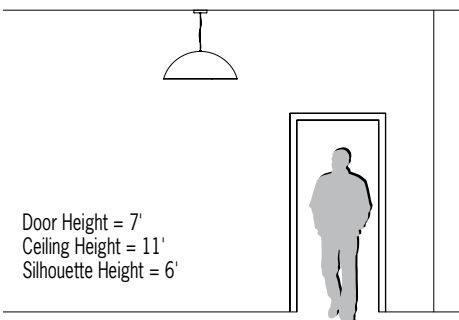

## PHOTOMETRICS

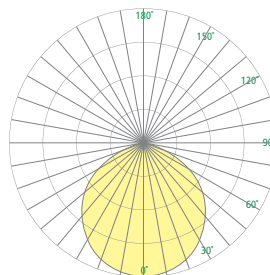

ETL Listed

5 Year Warranty

# CP4412 HELLEN (cont.)

32" Direct Pendant



Fill in shaded boxes using information listed below

CP4412	- MVOLT						
MODEL	SOURCE <sup>1</sup>	SOURCE OPTION <sup>2</sup>	VOLTAGE	OUTER FINISH	REFLECTOR FINISH	OPTION <sup>3</sup>	OAH <sup>4</sup>
	L27K(H) L27K(M) L27K(L) L30K(H) L30K(M) L30K(L) L35K(H) L35K(M) L35K(L) L40K(H) L40K(M) L40K(L)	90CRI  Minimum 80CRI is standard if option is not selected  Minimum 90CRI is standard with 2700K Sources	MVOLT	See last page for finish order codes  Canopy is painted white	See last page for finish order codes	DCC	See page 1

**SOURCE<sup>1</sup>** (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	7200	78
L27K(M)*	2700K	5000	52
L27K(L)*	2700K	2900	28
L30K(H)	3000K	7800	78
L30K(M)	3000K	5500	52
L30K(L)	3000K	3100	28
L35K(H)	3500K	8000	78
L35K(M)	3500K	5600	52
L35K(L)	3500K	3200	28
L40K(H)	4000K	8100	78
L40K(M)	4000K	5700	52
L40K(L)	4000K	3200	28

\*L27K sources are 90CRI standard

\*\*Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

**VOLTAGE**

MVOLT	120-277V, 50/60 Hz
-------	--------------------

**LUMEN MAINTENANCE RATING**

L70 (reported)	50,000 hrs
----------------	------------

**SOURCE OPTION<sup>2</sup>**

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

<b>90CRI</b>	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources (L27K sources: 90CRI is standard)
--------------	--


**OPTION<sup>3</sup>**

⚠ Option availability may be interdependent with Other Options

<b>DCC</b>	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
------------	---

# CP4412 HELLEN (cont.)

32" Direct Pendant

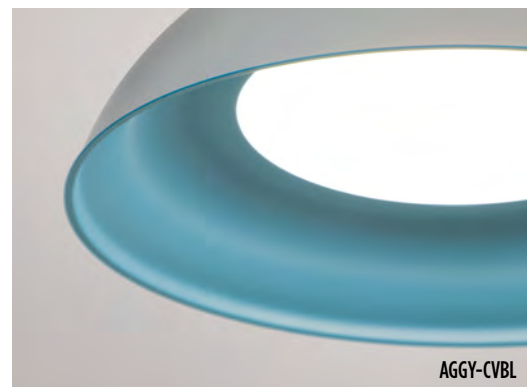

## SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors
- Larger size

## HELLEN PRODUCT FAMILY

- CP4408 – 16"
- CP4410 – 24"
- CP4412 – 32"

See [Visalighting.com/products/Hellen](https://visalighting.com/products/Hellen) for more information

# CP4412 HELLEN (cont.)

## 32" Direct Pendant



### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).  
For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

						
<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
						
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
						
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VLBK</b> Velvet Black	<b>VNRD</b> Vineyard Red

Alternative finishes are not available for this model (CP4412)